
DP-GEN

DeepModeling

Apr 10, 2024

OVERVIEW

1 Overview	1
1.1 About DP-GEN	1
1.2 Download and install	1
1.3 Use DP-GEN	2
1.4 Case Studies	2
1.5 License	2
2 Command line interface	3
2.1 Sub-commands	3
3 Code Structure	9
4 Run	11
4.1 Overview of the Run process	11
4.2 Example-of-param.json	13
4.3 Example of machine.json	16
4.4 dpgen run param parameters	18
4.5 dpgen run machine parameters	40
5 Init	77
5.1 Init_bulk	77
5.2 dpgen init_bulk parameters	78
5.3 dpgen init_bulk machine parameters	81
5.4 Init_surf	93
5.5 dpgen init_surf parameters	96
5.6 dpgen init_surf machine parameters	99
5.7 init_reaction	111
5.8 dpgen init_reaction parameters	112
5.9 dpgen init_reaction machine parameters	114
6 Simplify	153
6.1 Simplify	153
6.2 dpgen simplify parameters	155
6.3 dpgen simplify machine parameters	168
7 Auto test	207
7.1 Autotest Overview: Autotest for Deep Generator	207
7.2 Make run and post	209
7.3 Relaxation	210
7.4 Property	220
7.5 Refine	237

7.6	Reproduce	239
8	User Guide	243
8.1	Discussions	243
8.2	Issue	243
8.3	Tutorials	243
8.4	Example for parameters	243
8.5	Pull requests - How to contribute	244
8.6	Troubleshooting	244
8.7	Common Errors	244
9	Contributing Guide	247
9.1	Contributing Guide	247
10	DP-GEN API	251
10.1	dpgen package	251
11	Authors	305
	Bibliography	309
	Python Module Index	311
	Index	313

OVERVIEW

1.1 About DP-GEN

DP-GEN (Deep Generator) is a software written in Python, delicately designed to generate a deep learning based model of interatomic potential energy and force field. DP-GEN is dependent on DeepMD-kit. With highly scalable interface with common softwares for molecular simulation, DP-GEN is capable to automatically prepare scripts and maintain job queues on HPC machines (High Performance Cluster) and analyze results.

If you use this software in any publication, please cite:

Yuzhi Zhang, Haidi Wang, Weijie Chen, Jinzhe Zeng, Linfeng Zhang, Han Wang, and Weinan E, DP-GEN: A concurrent learning platform for the generation of reliable deep learning based potential energy models, Computer Physics Communications, 2020, 107206.

1.1.1 Highlighted features

- **Accurate and efficient:** DP-GEN is capable to sample more than tens of million structures and select only a few for first principles calculation. DP-GEN will finally obtain a uniformly accurate model.
- **User-friendly and automatic:** Users may install and run DP-GEN easily. Once successfully running, DP-GEN can dispatch and handle all jobs on HPCs, and thus there's no need for any personal effort.
- **Highly scalable:** With modularized code structures, users and developers can easily extend DP-GEN for their most relevant needs. DP-GEN currently supports for HPC systems (Slurm, PBS, LSF and cloud machines), Deep Potential interface with DeePMD-kit, MD interface with [LAMMPS](#), [Gromacs](#) and *ab-initio* calculation interface with VASP, PWSCF, CP2K, SIESTA and Gaussian, Abacus, PWMAT, etc . We're sincerely welcome and embraced to users' contributions, with more possibilities and cases to use DP-GEN.

1.2 Download and install

DP-GEN only supports Python 3.9 and above. You can use one of the following methods to install DP-GEN:

- Install via pip: `pip install dpgen`
- Install via conda: ``conda install -c conda-forge dpgen``
- Install from source code: `git clone https://github.com/deepmodeling/dpgen && pip install ./dpgen`

To test if the installation is successful, you may execute

```
dpgen -h
```

1.3 Use DP-GEN

A quick-start on using DPGEN can be found [here](#). You can follow the [Handson tutorial](#), it is friendly to new users.

1.4 Case Studies

- [Practical-Guidelines-for-DP](#)

Before starting a new Deep Potential (DP) project, we suggest people (especially those who are newbies) read the following context first to get some insights into what tools we can use, what kinds of risks and difficulties we may meet, and how we can advance a new DP project smoothly.

- [Convergence-Test](#)

to ensure the data quality, the reliability of the final model, as well as the feasibility of the project, a convergence test should be done first.

- [Gas-phase](#)

In this tutorial, we will take the simulation of methane combustion as an example and introduce the procedure of DP-based MD simulation.

- [Mg-Y_alloy](#)

We will briefly analyze the candidate configurational space of a metallic system by taking Mg-based Mg-Y binary alloy as an example. The task is divided into steps during the DP-GEN process.

- [Transfer-learning](#)

This tutorial will introduce how to implement potential energy surface (PES) transfer-learning by using the DP-GEN software. In DP-GEN (version > 0.8.0), the “simplify” module is designed for this purpose.

1.5 License

The project dpgen is licensed under [GNU LGPLv3.0](#)

COMMAND LINE INTERFACE

dpgen is a convenient script that uses DeepGenerator to prepare initial data, drive DeepMDkit and analyze results. This script works based on several sub-commands with their own options. To see the options for the sub-commands, type “dpgen sub-command -h”.

```
usage: dpgen [-h]
              {init_surf,init_bulk,auto_gen_param,init_reaction,run,run/report,collect,
              ↵simplify,autotest,db,gui}
              ...
```

2.1 Sub-commands

2.1.1 init_surf

Generating initial data for surface systems.

```
dpgen init_surf [-h] PARAM [MACHINE]
```

Positional Arguments

PARAM	parameter file, json/yaml format
MACHINE	machine file, json/yaml format

2.1.2 init_bulk

Generating initial data for bulk systems.

```
dpgen init_bulk [-h] PARAM [MACHINE]
```

Positional Arguments

PARAM	parameter file, json/yaml format
MACHINE	machine file, json/yaml format

2.1.3 auto_gen_param

auto gen param.json

```
dpigen auto_gen_param [-h] PARAM
```

Positional Arguments

PARAM	parameter file, json/yaml format
MACHINE	machine file, json/yaml format

2.1.4 init_reaction

Generating initial data for reactive systems.

```
dpigen init_reaction [-h] PARAM [MACHINE]
```

Positional Arguments

PARAM	parameter file, json/yaml format
MACHINE	machine file, json/yaml format

2.1.5 run

Main process of Deep Potential Generator.

```
dpigen run [-h] [-d] PARAM MACHINE
```

Positional Arguments

PARAM	parameter file, json/yaml format
MACHINE	machine file, json/yaml format

Named Arguments

-d, --debug	log debug info
	Default: False

2.1.6 run/report

Report the systems and the thermodynamic conditions of the labeled frames.

```
dpgen run/report [-h] [-s] [-i] [-t] [-p PARAM] [-v] JOB_DIR
```

Positional Arguments

JOB_DIR	the directory of the DP-GEN job,
----------------	----------------------------------

Named Arguments

-s, --stat-sys	count the labeled frames for each system Default: False
-i, --stat-iter	print the iteration candidate,failed,accurate count and fp calculation,success and fail count Default: False
-t, --stat-time	print the iteration time, warning!! assume model_devi parallel cores == 1 Default: False
-p, --param	the json file provides DP-GEN paramters, should be located in JOB_DIR Default: “param.json”
-v, --verbose	being loud Default: False

2.1.7 collect

Collect data.

```
dpgen collect [-h] [-p PARAMETER] [-v] [-m] [-s] JOB_DIR OUTPUT
```

Positional Arguments

JOB_DIR	the directory of the DP-GEN job
OUTPUT	the output directory of data

Named Arguments

-p, --parameter	the json file provides DP-GEN paramters, should be located in JOB_DIR Default: “param.json”
-v, --verbose	print number of data in each system Default: False
-m, --merge	merge the systems with the same chemical formula Default: False
-s, --shuffle	shuffle the data systems Default: False

2.1.8 simplify

Simplify data.

```
dpgen simplify [-h] [-d] PARAM MACHINE
```

Positional Arguments

PARAM	parameter file, json/yaml format
MACHINE	machine file, json/yaml format

Named Arguments

-d, --debug	log debug info Default: False
--------------------	----------------------------------

2.1.9 autotest

Auto-test for Deep Potential.

```
dpgen autotest [-h] [-d] TASK PARAM [MACHINE]
```

Positional Arguments

TASK	task can be make, run or post
PARAM	parameter file, json/yaml format
MACHINE	machine file, json/yaml format

Named Arguments

-d, --debug	log debug info
	Default: False

2.1.10 db

Collecting data from DP-GEN.

```
dpgen db [-h] PARAM
```

Positional Arguments

PARAM	parameter file, json format
--------------	-----------------------------

2.1.11 gui

Serve DP-GUI.

```
dpgen gui [-h] [-p PORT] [--bind_all]
```

Named Arguments

-p, --port	The port to serve DP-GUI on. Default: 6042
--bind_all	Serve on all public interfaces. This will expose your DP-GUI instance to the network on both IPv4 and IPv6 (where available). Default: False

CHAPTER
THREE

CODE STRUCTURE

Let's look at the home page of DP-GEN. <https://github.com/deepmodeling/dpgen>

```
build
CITATION.cff
conda
dist
doc
dpgen
dpgen.egg-info
examples
LICENSE
README.md
requirements.txt
setup.py
tests
```


- **tests** : unittest tools for developers.
- **examples**: templates for PARAM and MACHINE files for different software, versions and tasks. For details of the parameters in PARAM, you can refer to TASK parameters chapters in this document. If you are confused about how to set up a JSON file, you can also use `dpgui`

Most of the code related to DP-GEN functions is in the dpgen directory. Open the dpgen directory, and we can see

```
arginfo.py
auto_test
collect
data
database
_date.py
dispatcher
generator
__init__.py
main.py
__pycache__
remote
simplify
tools
util.py
_version.py
```

- `auto_test` corresponds to `dpgen autotest`, for undertaking materials property analysis.

- `collect` corresponds to `dpgen collect`.
- `data` corresponds to `dpgen init_bulk`, `dpgen init_surf` and `dpgen init_reaction`, for preparing initial data of bulk and surf systems.
- `database` is the source code for collecting data generated by DP-GEN and interface with database.
- `simplify` corresponds to `dpgen simplify`.
- `remote` and `dispatcher` : source code for automatically submiting scripts,maintaining job queues and collecting results. **Notice this part has been integrated into `dpp dispatcher`** generator is the core part of DP-GEN. It's for main process of deep generator. Let's open this folder.

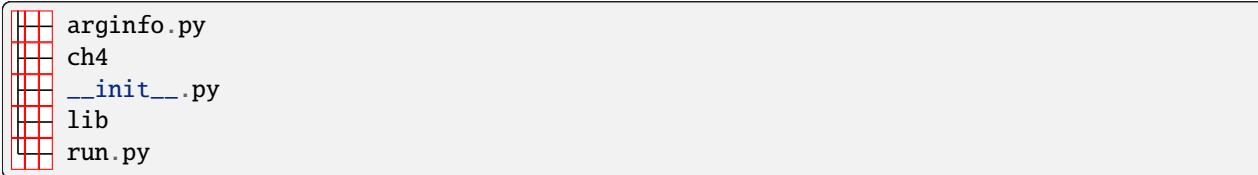

`run.py` is the core of DP-GEN, corresponding to `dpgen run`. We can find `make_train`, `run_train`, ... `post_fp`, and other steps related functions here.

4.1 Overview of the Run process

The run process contains a series of successive iterations, undertaken in order such as heating the system to certain temperatures. Each iteration is composed of three steps: exploration, labeling, and training. Accordingly, there are three sub-folders: 00.train, 01.model_devi, and 02.fp in each iteration.

00.train: DP-GEN will train several (default 4) models based on initial and generated data. The only difference between these models is the random seed for neural network initialization.

01.model_devi : represent for model-deviation. DP-GEN will use models obtained from 00.train to run Molecular Dynamics(default LAMMPS). Larger deviation for structure properties (default is the force of atoms) means less accuracy of the models. Using this criterion, a few structures will be selected and put into the next stage 02.fp for more accurate calculation based on First Principles.

02.fp : Selected structures will be calculated by first-principles methods(default VASP). DP-GEN will obtain some new data and put them together with initial data and data generated in previous iterations. After that, new training will be set up and DP-GEN will enter the next iteration!

In the run process of the DP-GEN, we need to specify the basic information about the system, the initial data, and details of the training, exploration, and labeling tasks. In addition, we need to specify the software, machine environment, and computing resource and enable the process of job generation, submission, query, and collection automatically. We can perform the run process as we expect by specifying the keywords in param.json and machine.json, and they will be introduced in detail in the following sections.

Here, we give a general description of the run process. We can execute the run process of DP-GEN easily by:

```
dpigen run param.json machine.json
```

The following files or folders will be created and upgraded by codes

- iter.00000x contains the main results that DP-GEN generates in the first iteration.
- record.dpigen records the current stage of the run process.
- dpigen.log includes time and iteration information.

When the first iteration is completed, the folder structure of iter.000000 is like this:

```
$ ls iter.000000
00.train 01.model_devi 02.fp
```

In folder iter.000000/ 00.train:

- Folder 00x contains the input and output files of the DeePMD-kit, in which a model is trained.

- graph.00x.pb is the model DeePMD-kit generates. The only difference between these models is the random seed for neural network initialization.

In folder iter.000000/ 01.model_devi

- Folder confs contains the initial configurations for LAMMPS MD converted from POSCAR you set in [sys_configs](#) of param.json.
- Folder task.000.00000x contains the input and output files of the LAMMPS. In folder task.000.00000x, file model_devi.out records the model deviation of concerned labels, energy and force in MD. It serves as the criterion for selecting which structures and doing first-principle calculations.

In folder iter.000000/ 02.fp

- candidate.shuffle.000.out records which structures will be selected from last step 01.model_devi. There are always far more candidates than the maximum you expect to calculate at one time. In this condition, DP-GEN will randomly choose up to [fp_task_max](#) structures and form the folder task.*.
- rest_accurate.shuffle.000.out records the other structures where our model is accurate ([max_devi_f](#) is less than [model_devi_f_trust_lo](#), no need to calculate any more),
- rest_failed.shuffled.000.out records the other structures where our model is too inaccurate (larger than [model_devi_f_trust_hi](#), there may be some error).
- data.000: After first-principle calculations, DP-GEN will collect these data and change them into the format DeePMD-kit needs. In the next iteration's 00.train, these data will be trained together as well as the initial data.

DP-GEN identifies the stage of the run process by a record file, record.dpgen, which will be created and upgraded by codes. Each line contains two numbers: the first is the index of iteration, and the second, ranging from 0 to 9, records which stage in each iteration is currently running.

Index of iterations	Stage in each iteration	Process
0	0	make_train
0	1	run_train
0	2	post_train
0	3	make_model_devi
0	4	run_model_devi
0	5	post_model_devi
0	6	make_fp
0	7	run_fp
0	8	post_fp

0,1,2 correspond to make_train, run_train, post_train. DP-GEN will write scripts in make_train, run the task by specific machine in run_train and collect result in post_train. The records for model_devi and fp stage follow similar rules.

If the process of DP-GEN stops for some reasons, DP-GEN will automatically recover the main process by record.dpgen. You may also change it manually for your purpose, such as removing the last iterations and recovering from one checkpoint. When re-running dpgen, the process will start from the stage that the last line record.

4.2 Example-of-param.json

We have provided different examples of param.json in dpgen/examples/run/. In this section, we give a description of the param.json, taking dpgen/examples/run/dp2.x-lammps-vasp/param_CH4_deepmd-kit-2.0.1.json as an example. This is a param.json for a gas-phase methane molecule. Here, DeePMD-kit (v2.x), LAMMPS and VASP codes are used for training, exploration and labeling respectively.

4.2.1 basics

The basics related keys in param.json are given as follows

```
"type_map": [
    "H",
    "C"
],
"mass_map": [
    1,
    12
],
```

The basics related keys specify the basic information about the system. *type_map* gives the atom types, i.e. “H” and “C”. *mass_map* gives the standard atom weights, i.e. “1” and “12”.

4.2.2 data

The data related keys in param.json are given as follows

```
"init_data_prefix": "...../init/",
"init_data_sys": [
    "CH4.POSCAR.01x01x01/02.md/sys-0004-0001/deepmd"
],

"sys_configs_prefix": "...../init/",
"sys_configs": [
    [
        "CH4.POSCAR.01x01x01/01.scale_pert/sys-0004-0001/scale*/00000*/POSCAR"
    ],
    [
        "CH4.POSCAR.01x01x01/01.scale_pert/sys-0004-0001/scale*/00001*/POSCAR"
    ]
],
```

The data related keys specify the init data for training initial DP models and structures used for model_devi calculations. *init_data_prefix* and *init_data_sys* specify the location of the init data. *sys_configs_prefix* and *sys_configs* specify the location of the structures.

Here, the init data is provided at “..... /init/CH4.POSCAR.01x01x01/02.md/sys-0004-0001/deepmd”. These structures are divided into two groups and provided at “...../init/CH4.POSCAR.01x01x01/01.scale_pert/sys-0004-0001/scale*/00000*/POSCAR” and “...../init/CH4.POSCAR.01x01x01/01.scale_pert/sys-0004-0001/scale*/00001*/POSCAR”.

4.2.3 training

The training related keys in param.json are given as follows

```
"numb_models": 4,  
"default_training_param": {  
},
```

The training related keys specify the details of training tasks. `numb_models` specifies the number of models to be trained. “`default_training_param`” specifies the training parameters for deepmd-kit.

Here, 4 DP models will be trained in `00.train`. A detailed explanation of training parameters can be found in DeePMD-kit’s documentation (<https://docs.deepmodeling.com/projects/deepmd/en/master/>).

4.2.4 exploration

The exploration related keys in param.json are given as follows

```
"model_devi_dt": 0.002,  
"model_devi_skip": 0,  
"model_devi_f_trust_lo": 0.05,  
"model_devi_f_trust_hi": 0.15,  
"model_devi_clean_traj": true,  
"model_devi_jobs": [  
    {  
        "sys_idx": [  
            0  
        ],  
        "temps": [  
            100  
        ],  
        "press": [  
            1.0  
        ],  
        "trj_freq": 10,  
        "nsteps": 300,  
        "ensemble": "nvt",  
        "_idx": "00"  
    },  
    {  
        "sys_idx": [  
            1  
        ],  
        "temps": [  
            100  
        ],  
        "press": [  
            1.0  
        ],  
        "trj_freq": 10,  
        "nsteps": 3000,  
        "ensemble": "nvt",  
        "_idx": "01"  
    }]
```

(continues on next page)

(continued from previous page)

```

    }
],

```

The exploration related keys specify the details of exploration tasks. `model_devi_dt` specifies timestep for MD simulation. `model_devi_skip` specifies the number of structures skipped for saving in each MD. `model_devi_f_trust_lo` and `model_devi_f_trust_hi` specify the lower and upper bound of model_devi of forces for the selection. `model_devi_clean_traj` specifies whether to clean traj folders in MD. If type of `model_devi_clean_traj` is boolean type then it denote whether to clean traj folders in MD since they are too large. In `model_devi_jobs`, `sys_idx` specifies the group of structures used for `model_devi` calculations, `temp` specifies the temperature (K) in MD, `press` specifies the pressure (Bar) in MD, `trj_freq` specifies the frequency of trajectory saved in MD, `nsteps` specifies the running steps of MD, `ensemble` specifies the ensemble used in MD, and “`_idx`” specifies the index of iteration.

Here, MD simulations are performed at the temperature of 100 K and the pressure of 1.0 Bar with an integrator time of 2 fs under the nvt ensemble. Two iterations are set in `model_devi_jobs`. MD simulations are run for 300 and 3000 time steps with the first and second groups of structures in `sys_configs` in 00 and 01 iterations. We choose to save all structures generated in MD simulations and have set `trj_freq` as 10, so 30 and 300 structures are saved in 00 and 01 iterations. If the “`max_devi_f`” of saved structure falls between 0.05 and 0.15, DP-GEN will treat the structure as a candidate. We choose to clean traj folders in MD since they are too large. If you want to save the most recent n iterations of traj folders, you can set `model_devi_clean_traj` to be an integer.

4.2.5 labeling

The labeling related keys in param.json are given as follows

```

"fp_style": "vasp",
"shuffle_poscar": false,
"fp_task_max": 20,
"fp_task_min": 1,
"fp_pp_path": "...../methane/",
"fp_pp_files": [
    "POTCAR"
],
"fp_incar": "...../INCAR_methane"

```

The labeling related keys specify the details of labeling tasks. `fp_style` specifies software for First Principles. `fp_task_max` and `fp_task_min` specify the minimum and maximum of structures to be calculated in 02.fp of each iteration. `fp_pp_path` and `fp_pp_files` specify the location of the psuedo-potential file to be used for 02.fp. `run_jdata[fp_style=vasp]/fp_incar` specifies input file for VASP. INCAR must specify KSPACING and KGAMMA.

Here, a minimum of 1 and a maximum of 20 structures will be labeled using the VASP code with the INCAR provided at “`...../INCAR_methane`” and POTCAR provided at “`...../methane/POTCAR`” in each iteration. Note that the order of elements in POTCAR should correspond to the order in `type_map`.

All the keys of the DP-GEN are explained in detail in the section Parameters.

4.3 Example of machine.json

4.3.1 DPDispatcher Update Note

DPDispatcher has updated and the api of machine.json is changed. DP-GEN will use the new DPDispatcher if the value of key `api_version` in machine.json is equal to or large than 1.0. And for now, DPDispatcher is maintained on a separate repo (<https://github.com/deepmodeling/dpdispatcher>). Please check the documents (<https://deepmd.readthedocs.io/projects/dpdispatcher/en/latest/>) for more information about the new DPDispatcher.

DP-GEN will use the old DPDispatcher if the key `api_version` is not specified in machine.json or the `api_version` is smaller than 1.0. This guarantees that the old machine.json still works.

4.3.2 New DPDispatcher

Each iteration in the run process of DP-GEN is composed of three steps: exploration, labeling, and training. Accordingly, machine.json is composed of three parts: train, model_devi, and fp. Each part is a list of dicts. Each dict can be considered as an independent environment for calculation.

In this section, we will show you how to perform train task at a local workstation, model_devi task at a local Slurm cluster, and fp task at a remote PBS cluster using the new DPDispatcher. For each task, three types of keys are needed:

- Command: provides the command used to execute each step.
- Machine: specifies the machine environment (local workstation, local or remote cluster, or cloud server).
- Resources: specify the number of groups, nodes, CPU, and GPU; enable the virtual environment.

Performing train task at a local workstation

In this example, we perform the `train` task on a local workstation.

```
"train":  
{  
    "command": "dp",  
    "machine": {  
        "batch_type": "Shell",  
        "context_type": "local",  
        "local_root": "./",  
        "remote_root": "/home/user1234/work_path"  
    },  
    "resources": {  
        "number_node": 1,  
        "cpu_per_node": 4,  
        "gpu_per_node": 1,  
        "group_size": 1,  
        "source_list": ["/home/user1234/deepmd.env"]  
    }  
},
```

The `command` for the train task in the DeePMD-kit is “dp”.

In machine parameters, `batch_type` specifies the type of job scheduling system. If there is no job scheduling system, we can use the “Shell” to perform the task. `context_type` specifies the method of data transfer, and “local” means copying and moving data via local file storage systems (e.g. cp, mv, etc.). In DP-GEN, the paths of all tasks are

automatically located and set by the software, and therefore `local_root` is always set to “`.`”. The input file for each task will be sent to the `remote_root` and the task will be performed there, so we need to make sure that the path exists.

In the resources parameter, `number_node`, `cpu_per_node`, and `gpu_per_node` specify the number of nodes, the number of CPUs, and the number of GPUs required for a task respectively. `group_size`, which needs to be highlighted, specifies how many tasks will be packed into a group. In the training tasks, we need to train 4 models. If we only have one GPU, we can set the `group_size` to 4. If `group_size` is set to 1, 4 models will be trained on one GPU at the same time, as there is no job scheduling system. Finally, the environment variables can be activated by `source_list`. In this example, “`source /home/user1234/deepmd.env`” is executed before “`dp`” to load the environment variables necessary to perform the training task.

Perform model_devi task at a local Slurm cluster

In this example, we perform the model_devi task at a local Slurm workstation.

```
"model_devi": {
    "command": "lmp",
    "machine": {
        "context_type": "local",
        "batch_type": "Slurm",
        "local_root": "./",
        "remote_root": "/home/user1234/work_path"
    },
    "resources": {
        "number_node": 1,
        "cpu_per_node": 4,
        "gpu_per_node": 1,
        "queue_name": "QueueGPU",
        "custom_flags": ["#SBATCH --mem=32G"],
        "group_size": 10,
        "source_list": ["/home/user1234/lammps.env"]
    }
}
```

The `command` for the model_devi task in the LAMMPS is “`lmp`”.

In the machine parameter, we specify the type of job scheduling system by changing the `batch_type` to “`Slurm`”.

In the resources parameter, we specify the name of the queue to which the task is submitted by adding `queue_name`. We can add additional lines to the calculation script via the `custom_flags`. In the model_devi steps, there are frequently many short tasks, so we usually pack multiple tasks (e.g. 10) into a group for submission. Other parameters are similar to that of the local workstation.

Perform fp task in a remote PBS cluster

In this example, we perform the fp task at a remote PBS cluster that can be accessed via SSH.

```
"fp": {
    "command": "mpirun -n 32 vasp_std",
    "machine": {
        "context_type": "SSHContext",
        "batch_type": "PBS",
    }
}
```

(continues on next page)

(continued from previous page)

```

"local_root": "./",
"remote_root": "/home/user1234/work_path",
"remote_profile": {
    "hostname": "39.xxx.xx.xx",
    "username": "user1234"
},
"resources": {
    "number_node": 1,
    "cpu_per_node": 32,
    "gpu_per_node": 0,
    "queue_name": "QueueCPU",
    "group_size": 5,
    "source_list": ["/home/user1234/vasp.env"]
}
}

```

VASP code is used for fp task and mpi is used for parallel computing, so “mpirun -n 32” is added to specify the number of parallel threads.

In the machine parameter, `context_type` is modified to “SSHContext” and `batch_type` is modified to “PBS”. It is worth noting that `remote_root` should be set to an accessible path on the remote PBS cluster. `remote_profile` is added to specify the information used to connect the remote cluster, including hostname, username, port, etc.

In the resources parameter, we set `gpu_per_node` to 0 since it is cost-effective to use the CPU for VASP calculations. Explicit descriptions of keys in machine.json will be given in the following section.

4.4 dpgen run param parameters

Note: One can load, modify, and export the input file by using our effective web-based tool [DP-GUI](#) online or hosted using the [command line interface](#) `dpgen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

run_jdata:

type: dict
argument path: run_jdata
param.json file

type_map:

type: list[str]
argument path: run_jdata/type_map

Atom types. Reminder: The elements in param.json, type.raw and data.lmp(when using lammps) should be in the same order.

mass_map:

type: str | list[float], optional, default: auto
argument path: run_jdata/mass_map

Standard atomic weights (default: “auto”). if one want to use isotopes, or non-standard element names, chemical symbols, or atomic number in the type_map list, please customize the mass_map list instead of using “auto”.

use_ele_temp:

type: int, optional, default: 0

argument path: run_jdata/use_ele_temp

Currently only support fp_style vasp.

- 0: no electron temperature.
- 1: eletron temperature as frame parameter.
- 2: electron temperature as atom parameter.

init_data_prefix:

type: str, optional

argument path: run_jdata/init_data_prefix

Prefix of initial data directories.

init_data_sys:

type: list[str]

argument path: run_jdata/init_data_sys

Paths of initial data. The path can be either a system diretory containing NumPy files or an HDF5 file. You may use either absolute or relative path here. Systems will be detected recursively in the directories or the HDF5 file.

sys_format:

type: str, optional, default: vasp/poscar

argument path: run_jdata/sys_format

Format of sys_configs.

init_batch_size:

type: list[typing.Union[int, str]] | str, optional

argument path: run_jdata/init_batch_size

Each number is the batch_size of corresponding system for training in init_data_sys. One recommended rule for setting the sys_batch_size and init_batch_size is that batch_size mutiply number of atoms of the stucture should be larger than 32. If set to auto, batch size will be 32 divided by number of atoms. This argument will not override the mixed batch size in *default_training_param*.

sys_configs_prefix:

type: str, optional

argument path: run_jdata/sys_configs_prefix

Prefix of sys_configs.

sys_configs:

type: list[list[str]]

argument path: run_jdata/sys_configs

2D list. Containing directories of structures to be explored in iterations for each system. Wildcard characters are supported here.

sys_batch_size:

type: list[typing.Union[int, str]], optional

argument path: run_jdata/sys_batch_size

Each number is the batch_size for training of corresponding system in sys_configs. If set to auto, batch size will be 32 divided by number of atoms. This argument will not override the mixed batch size in *default_training_param*.

numb_models:

type: int

argument path: run_jdata/numb_models

Number of models to be trained in 00.train. 4 is recommend.

training_iter0_model_path:

type: list[str], optional

argument path: run_jdata/training_iter0_model_path

The model used to init the first iter training. Number of element should be equal to numb_models.

training_init_model:

type: bool, optional

argument path: run_jdata/training_init_model

Iteration > 0, the model parameters will be initialized from the model trained at the previous iteration. Iteration == 0, the model parameters will be initialized from training_iter0_model_path.

default_training_param:

type: dict

argument path: run_jdata/default_training_param

Training parameters for deepmd-kit in 00.train. You can find instructions from [DeePMD-kit documentation](#).

dp_train_skip_neighbor_stat:

type: bool, optional, default: False

argument path: run_jdata/dp_train_skip_neighbor_stat

Append –skip-neighbor-stat flag to dp train.

dp_compress:

type: bool, optional, default: False

argument path: run_jdata/dp_compress

Use dp compress to compress the model.

training_reuse_iter:

type: int | NoneType, optional

argument path: run_jdata/training_reuse_iter

The minimal index of iteration that continues training models from old models of last iteration.

training_reuse_old_ratio:

type: str | float, optional, default: auto

argument path: run_jdata/training_reuse_old_ratio

The probability proportion of old data during training. It can be:

- float: directly assign the probability of old data;

- *auto:f*: automatic probability, where f is the new-to-old ratio;
- *auto*: equivalent to *auto:10*.

This option is only adopted when continuing training models from old models. This option will override default parameters.

training_reuse_numb_steps:

type: int | NoneType, optional, default: None, alias: *training_reuse_stop_batch*
 argument path: run_jdata/training_reuse_numb_steps

Number of training batch. This option is only adopted when continuing training models from old models. This option will override default parameters.

training_reuse_start_lr:

type: float | NoneType, optional, default: None
 argument path: run_jdata/training_reuse_start_lr

The learning rate the start of the training. This option is only adopted when continuing training models from old models. This option will override default parameters.

training_reuse_start_pref_e:

type: int | float | NoneType, optional, default: None
 argument path: run_jdata/training_reuse_start_pref_e

The prefactor of energy loss at the start of the training. This option is only adopted when continuing training models from old models. This option will override default parameters.

training_reuse_start_pref_f:

type: int | float | NoneType, optional, default: None
 argument path: run_jdata/training_reuse_start_pref_f

The prefactor of force loss at the start of the training. This option is only adopted when continuing training models from old models. This option will override default parameters.

model_devi_activation_func:

type: list[list[str]] | NoneType, optional
 argument path: run_jdata/model_devi_activation_func

The activation function in the model. The shape of list should be (N_models, 2), where 2 represents the embedding and fitting network. This option will override default parameters.

srtab_file_path:

type: str, optional
 argument path: run_jdata/srtab_file_path

The path of the table for the short-range pairwise interaction which is needed when using DP-ZBL potential

one_h5:

type: bool, optional, default: False
 argument path: run_jdata/one_h5

When using DeePMD-kit, all of the input data will be merged into one HDF5 file.

training_init_frozen_model:
type: list[str], optional
argument path: run_jdata/training_init_frozen_model
At interation 0, initilize the model parameters from the given frozen models. Number of element should be equal to numb_models.

training_finetune_model:
type: list[str], optional
argument path: run_jdata/training_finetune_model
At interation 0, finetune the model parameters from the given frozen models. Number of element should be equal to numb_models.

fp_task_max:
type: int
argument path: run_jdata/fp_task_max
Maximum number of structures to be calculated in each system in 02.fp of each iteration. If the number of candidate structures exceeds *fp_task_max*, *fp_task_max* structures will be randomly picked from the candidates and labeled.

fp_task_min:
type: int
argument path: run_jdata/fp_task_min
Skip the training in the next iteration if the number of structures is no more than *fp_task_min*.

fp_accurate_threshold:
type: float, optional
argument path: run_jdata/fp_accurate_threshold
If the accurate ratio is larger than this number, no fp calculation will be performed, i.e. *fp_task_max* = 0.

fp_accurate_soft_threshold:
type: float, optional
argument path: run_jdata/fp_accurate_soft_threshold
If the accurate ratio is between this number and *fp_accurate_threshold*, the *fp_task_max* linearly decays to zero.

fp_cluster_vacuum:
type: float, optional
argument path: run_jdata/fp_cluster_vacuum
If the vacuum size is smaller than this value, this cluster will not be chosen for labeling.

detailed_report_make_fp:
type: bool, optional, default: True
argument path: run_jdata/detailed_report_make_fp
If set to true, a detailed report will be generated for each iteration.

ratio_failed:
type: float, optional

argument path: `run_jdata/ratio_failed`

Check the ratio of unsuccessfully terminated jobs. If too many FP tasks are not converged, RuntimeError will be raised.

Depending on the value of `model_devi_engine`, different sub args are accepted.

model_devi_engine:

type: str (flag key), default: `lammps`

argument path: `run_jdata/model_devi_engine`

possible choices: `lammps, amber, calypso, gromacs`

Engine for the model deviation task.

When `model_devi_engine` is set to `lammps`:

LAMMPS

model_devi_jobs:

type: list

argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs`

Settings for exploration in `01.model_devi`. Each dict in the list corresponds to one iteration. The index of `model_devi_jobs` exactly accord with index of iterations

This argument takes a list with each element containing the following:

template:

type: dict, optional

argument path:

`run_jdata[model_devi_engine=lammps]/model_devi_jobs/template`

Give an input file template for the supported engine software adopted in `01.model_devi`. Through user-defined template, any freedom (function) that is permitted by the engine software could be inherited (invoked) in the workflow.

lmp:

type: str, optional

argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/template/lmp`

The path to `input.lammps` template. Instructions can be found in [LAMMPS documentation](#).

plm:

type: str, optional

argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/template/plm`

The path to `input.plumed` template. Instructions can be found in [PLUMED documentation](#).

rev_mat:

type: dict, optional

argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/rev_mat`

revise matrix for revising variable(s) defined in the template into the specific values (iteration-resolved). Values will be broadcasted for all tasks within the iteration invoking this key.

lmp:
type: dict, optional
argument path:
run_jdata[model_devi_engine=lammps]/
model_devi_jobs/rev_mat/lmp
revise matrix for revising variable(s) defined in the lammps template into the specific values (iteration-resolved).

plm:
type: dict, optional
argument path:
run_jdata[model_devi_engine=lammps]/
model_devi_jobs/rev_mat/plm
revise matrix for revising variable(s) defined in the plumed template into specific values(iteration-resolved)

sys_rev_mat:
type: dict, optional
argument path: run_jdata[model_devi_engine=lammps]/
model_devi_jobs/sys_rev_mat
system-resolved revise matrix for revising variable(s) defined in the template into specific values. Values should be individually assigned to each system adopted by this iteration, through a dictionary where first-level keys are values of sys_idx of this iteration.

sys_idx:
type: list[int]
argument path: run_jdata[model_devi_engine=lammps]/
model_devi_jobs/sys_idx
Systems to be selected as the initial structure of MD and be explored. The index corresponds exactly to the sys_configs.

temps:
type: list[float], optional
argument path: run_jdata[model_devi_engine=lammps]/
model_devi_jobs/temps
Temperature (K) in MD.

press:
type: list[float], optional
argument path: run_jdata[model_devi_engine=lammps]/
model_devi_jobs/press
Pressure (Bar) in MD. Required when ensemble is npt.

trj_freq:
type: int
argument path: run_jdata[model_devi_engine=lammps]/
model_devi_jobs/trj_freq
Frequency of trajectory saved in MD.

nsteps:

type: `int`, optional
argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/nsteps`

Running steps of MD. It is not optional when not using a template.

nbeads:

type: `int`, optional
argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/nbeads`

Number of beads in PIMD. If not given, classical MD will be performed.
Only supported for LAMMPS version >= 20230615.

ensemble:

type: `str`, optional
argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/ensemble`

Determining which ensemble used in MD, options include “npt” and “nvt”. It is not optional when not using a template.

neidelay:

type: `int`, optional
argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/neidelay`

delay building until this many steps since last build.

taut:

type: `float`, optional
argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/taut`

Coupling time of thermostat (ps).

taup:

type: `float`, optional
argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/taup`

Coupling time of barostat (ps).

model_devi_f_trust_lo:

type: `dict | float`, optional
argument path: `run_jdata[model_devi_engine=lammps]/model_devi_jobs/model_devi_f_trust_lo`

Lower bound of forces for the selection. If dict, should be set for each index in sys_idx, respectively.

model_devi_f_trust_hi:

type: dict | float, optional
argument path: run_jdata[model_devi_engine=lammps]/model_devi_jobs/model_devi_f_trust_hi

Upper bound of forces for the selection. If dict, should be set for each index in sys_idx, respectively.

model_devi_v_trust_lo:

type: dict | float, optional
argument path: run_jdata[model_devi_engine=lammps]/model_devi_jobs/model_devi_v_trust_lo

Lower bound of virial for the selection. If dict, should be set for each index in sys_idx, respectively. Should be used with DeePMD-kit v2.x.

model_devi_v_trust_hi:

type: dict | float, optional
argument path: run_jdata[model_devi_engine=lammps]/model_devi_jobs/model_devi_v_trust_hi

Upper bound of virial for the selection. If dict, should be set for each index in sys_idx, respectively. Should be used with DeePMD-kit v2.x.

model_devi_dt:

type: float
argument path: run_jdata[model_devi_engine=lammps]/model_devi_dt
Timestep for MD. 0.002 is recommend.

model_devi_skip:

type: int
argument path:
run_jdata[model_devi_engine=lammps]/model_devi_skip
Number of structures skipped for fp in each MD.

model_devi_f_trust_lo:

type: list[float] | dict | float
argument path:
run_jdata[model_devi_engine=lammps]/model_devi_f_trust_lo

Lower bound of forces for the selection. If list or dict, should be set for each index in sys_configs, respectively.

model_devi_f_trust_hi:

type: list[float] | dict | float
argument path:
run_jdata[model_devi_engine=lammps]/model_devi_f_trust_hi

Upper bound of forces for the selection. If list or dict, should be set for each index in sys_configs, respectively.

model_devi_v_trust_lo:

type: list[float] | dict | float, optional, default: 100000000000.0

argument path:

`run_jdata[model_devi_engine=lammps]/model_devi_v_trust_lo`

Lower bound of virial for the selection. If list or dict, should be set for each index in sys_configs, respectively. Should be used with DeePMD-kit v2.x.

model_devi_v_trust_hi:

type: list[float] | dict | float, optional, default: 100000000000.0

argument path:

`run_jdata[model_devi_engine=lammps]/model_devi_v_trust_hi`

Upper bound of virial for the selection. If list or dict, should be set for each index in sys_configs, respectively. Should be used with DeePMD-kit v2.x.

model_devi_adapt_trust_lo:

type: bool, optional

argument path:

`run_jdata[model_devi_engine=lammps]/model_devi_adapt_trust_lo`

Adaptively determines the lower trust levels of force and virial. This option should be used together with model_devi_numb_candi_f, model_devi_numb_candi_v and optionally with model_devi_perc_candi_f and model_devi_perc_candi_v. dpigen will make two sets:

- 1. From the frames with force model deviation lower than `model_devi_f_trust_hi`, select `max(model_devi_numb_candi_f, model_devi_perc_candi_f*n_frames)` frames with largest force model deviation.
- 2. From the frames with virial model deviation lower than `model_devi_v_trust_hi`, select `max(model_devi_numb_candi_v, model_devi_perc_candi_v*n_frames)` frames with largest virial model deviation.

The union of the two sets is made as candidate dataset.

model_devi_numb_candi_f:

type: int, optional

argument path:

`run_jdata[model_devi_engine=lammps]/model_devi_numb_candi_f`

See `model_devi_adapt_trust_lo`.

model_devi_numb_candi_v:

type: int, optional

argument path:

`run_jdata[model_devi_engine=lammps]/model_devi_numb_candi_v`

See `model_devi_adapt_trust_lo`.

model_devi_perc_candi_f:

type: float, optional

argument path:
run_jdata[model_devi_engine=lammps]/model_devi_perc_candi_f

See model_devi_adapt_trust_lo.

model_devi_perc_candi_v:

type: float, optional

argument path:

run_jdata[model_devi_engine=lammps]/model_devi_perc_candi_v

See model_devi_adapt_trust_lo.

model_devi_f_avg_relative:

type: bool, optional

argument path:

run_jdata[model_devi_engine=lammps]/model_devi_f_avg_relative

Normalized the force model deviations by the RMS force magnitude along the trajectory. This key should not be used with use_relative.

model_devi_clean_traj:

type: bool | int, optional, default: True

argument path:

run_jdata[model_devi_engine=lammps]/model_devi_clean_traj

If type of model_devi_clean_traj is bool type then it denote whether to clean traj folders in MD since they are too large. If it is Int type, then the most recent n iterations of traj folders will be retained, others will be removed.

model_devi_merge_traj:

type: bool, optional, default: False

argument path:

run_jdata[model_devi_engine=lammps]/model_devi_merge_traj

If model_devi_merge_traj is set as True, only all.lammpstrj will be generated, instead of lots of small traj files.

model_devi_nopbc:

type: bool, optional, default: False

argument path:

run_jdata[model_devi_engine=lammps]/model_devi_nopbc

Assume open boundary condition in MD simulations.

model_devi_plumed:

type: bool, optional, default: False

argument path:

run_jdata[model_devi_engine=lammps]/model_devi_plumed

model_devi_plumed_path:

type: bool, optional, default: False

argument path:

run_jdata[model_devi_engine=lammps]/model_devi_plumed_path

shuffle_poscar:

type: bool, optional, default: False
argument path: run_jdata[model_devi_engine=lammps]/shuffle_poscar
Shuffle atoms of each frame before running simulations. The purpose is to sample the element occupation of alloys.

use_relative:

type: bool, optional, default: False
argument path: run_jdata[model_devi_engine=lammps]/use_relative
Calculate relative force model deviation.

epsilon:

type: float, optional
argument path: run_jdata[model_devi_engine=lammps]/epsilon
The level parameter for computing the relative force model deviation.

use_relative_v:

type: bool, optional, default: False
argument path: run_jdata[model_devi_engine=lammps]/use_relative_v
Calculate relative virial model deviation.

epsilon_v:

type: float, optional
argument path: run_jdata[model_devi_engine=lammps]/epsilon_v
The level parameter for computing the relative virial model deviation.

When `model_devi_engine` is set to `amber`:

Amber DPRc engine. The command argument in the machine file should be path to sander.

model_devi_jobs:

type: list
argument path: run_jdata[model_devi_engine=amber]/model_devi_jobs
List of dicts. The list including the dict for information of each cycle.

This argument takes a list with each element containing the following:

sys_idx:

type: list[int]
argument path: run_jdata[model_devi_engine=amber]/
model_devi_jobs/sys_idx
List of ints. List of systems to run.

trj_freq:

type: int
argument path: run_jdata[model_devi_engine=amber]/
model_devi_jobs/trj_freq
Frequency to dump trajectory.

```
restart_from_iter:  
    type: int, optional  
    argument path: run_jdata[model_devi_engine=amber]/  
        model_devi_jobs/restart_from_iter  
    The iteration index to restart the simulation from. If not given, the  
    simulation is restarted from sys_configs.  
low_level:  
    type: str  
    argument path: run_jdata[model_devi_engine=amber]/low_level  
    Low level method. The value will be filled into mdin file as @qm_theory@.  
cutoff:  
    type: float  
    argument path: run_jdata[model_devi_engine=amber]/cutoff  
    Cutoff radius for the DPRc model.  
parm7_prefix:  
    type: str, optional  
    argument path: run_jdata[model_devi_engine=amber]/parm7_prefix  
    The path prefix to AMBER PARM7 files.  
parm7:  
    type: list[str]  
    argument path: run_jdata[model_devi_engine=amber]/parm7  
    List of paths to AMBER PARM7 files. Each file maps to a system.  
mdin_prefix:  
    type: str, optional  
    argument path: run_jdata[model_devi_engine=amber]/mdin_prefix  
    The path prefix to AMBER mdin template files.  
mdin:  
    type: list[str]  
    argument path: run_jdata[model_devi_engine=amber]/mdin  
    List of paths to AMBER mdin template files. Each files maps to a system. In the  
    template, the following keywords will be replaced by the actual value: @freq@:  
    freq to dump trajectory; @nslim@: total time step to run; @qm_region@: AM-  
    BER mask of the QM region; @qm_theory@: The low level QM theory, such as  
    DFTB2; @qm_charge@: The total charge of the QM theory, such as -2; @rcut@:  
    cutoff radius of the DPRc model; @GRAPH_FILE0@, @GRAPH_FILE1@, ... :  
    graph files.  
qm_region:  
    type: list[str]  
    argument path: run_jdata[model_devi_engine=amber]/qm_region  
    List of strings. AMBER mask of the QM region. Each mask maps to a system.
```

qm_charge:

type: list[int]
 argument path: run_jdata[model_devi_engine=amber]/qm_charge
 List of ints. Charge of the QM region. Each charge maps to a system.

nsteps:

type: list[int]
 argument path: run_jdata[model_devi_engine=amber]/nsteps
 List of ints. The number of steps to run. Each number maps to a system.

r:

type: list[list[typing.Union[float, list[float]]]]
 argument path: run_jdata[model_devi_engine=amber]/r
 2D or 3D list of floats. Constrict values for the enhanced sampling. The first dimension maps to systems. The second dimension maps to confs in each system. The third dimension is the constrict value. It can be a single float for 1D or list of floats for nD.

disang_prefix:

type: str, optional
 argument path: run_jdata[model_devi_engine=amber]/disang_prefix
 The path prefix to disang prefix.

disang:

type: list[str]
 argument path: run_jdata[model_devi_engine=amber]/disang
 List of paths to AMBER disang files. Each file maps to a system. The keyword RVAL will be replaced by the constrict values, or RVAL1, RVAL2, ... for an nD system.

model_devi_f_trust_lo:

type: list[float] | dict | float
 argument path:
 run_jdata[model_devi_engine=amber]/model_devi_f_trust_lo
 Lower bound of forces for the selection. If dict, should be set for each index in sys_idx, respectively.

model_devi_f_trust_hi:

type: list[float] | dict | float
 argument path:
 run_jdata[model_devi_engine=amber]/model_devi_f_trust_hi
 Upper bound of forces for the selection. If dict, should be set for each index in sys_idx, respectively.

When `model_devi_engine` is set to `calypso`:

TODO: add doc

When `model_devi_engine` is set to `gromacs`:

TODO: add doc

Depending on the value of `fp_style`, different sub args are accepted.

fp_style:

type: `str` (flag key)

argument path: `run_jdata/fp_style`

possible choices: `vasp, gaussian, siesta, cp2k, abacus, amber/diff, pmat, pwscf, custom`

Software for First Principles.

When `fp_style` is set to `vasp`:

fp_pp_path:

type: `str`

argument path: `run_jdata[fp_style=vasp]/fp_pp_path`

Directory of psuedo-potential file to be used for 02.fp exists.

fp_pp_files:

type: `list[str]`

argument path: `run_jdata[fp_style=vasp]/fp_pp_files`

Psuedo-potential file to be used for 02.fp. Note that the order of elements should correspond to the order in `type_map`.

fp_incar:

type: `str`

argument path: `run_jdata[fp_style=vasp]/fp_incar`

Input file for VASP. INCAR must specify KSPACING and KGAMMA.

fp_aniso_kspacing:

type: `list[float]`, optional

argument path: `run_jdata[fp_style=vasp]/fp_aniso_kspacing`

Set anisotropic kspacing. Usually useful for 1-D or 2-D materials. Only support VASP. If it is setting the KSPACING key in INCAR will be ignored.

cvasp:

type: `bool`, optional

argument path: `run_jdata[fp_style=vasp]/cvasp`

If cvasp is true, DP-GEN will use Custodian to help control VASP calculation.

fp_skip_bad_box:

type: `str`, optional

argument path: `run_jdata[fp_style=vasp]/fp_skip_bad_box`

Skip the configurations that are obviously unreasonable before 02.fp

When `fp_style` is set to `gaussian`:

use_clusters:

type: bool, optional, default: False
argument path: run_jdata[fp_style=gaussian]/use_clusters

If set to true, clusters will be taken instead of the whole system.

cluster_cutoff:

type: float, optional
argument path: run_jdata[fp_style=gaussian]/cluster_cutoff

The soft cutoff radius of clusters if *use_clusters* is set to true. Molecules will be taken as whole even if part of atoms is out of the cluster. Use *cluster_cutoff_hard* to only take atoms within the hard cutoff radius.

cluster_cutoff_hard:

type: float, optional
argument path: run_jdata[fp_style=gaussian]/cluster_cutoff_hard

The hard cutoff radius of clusters if *use_clusters* is set to true. Outside the hard cutoff radius, atoms will not be taken even if they are in a molecule where some atoms are within the cutoff radius.

cluster_minify:

type: bool, optional, default: False
argument path: run_jdata[fp_style=gaussian]/cluster_minify

If enabled, when an atom within the soft cutoff radius connects a single bond with a non-hydrogen atom out of the soft cutoff radius, the outer atom will be replaced by a hydrogen atom. When the outer atom is a hydrogen atom, the outer atom will be kept. In this case, other atoms out of the soft cutoff radius will be removed.

fp_params:

type: dict
argument path: run_jdata[fp_style=gaussian]/fp_params

Parameters for Gaussian calculation.

keywords:

type: str | list[str]
argument path:
run_jdata[fp_style=gaussian]/fp_params/keywords

Keywords for Gaussian input, e.g. force b3lyp/6-31g**. If a list, run multiple steps.

multiplicity:

type: str | int, optional, default: auto
argument path:
run_jdata[fp_style=gaussian]/fp_params/multiplicity

Spin multiplicity for Gaussian input. If *auto*, multiplicity will be detected automatically, with the following rules: when fragment_guesses=True, multiplicity will +1 for each radical, and +2 for each oxygen molecule; when fragment_guesses=False, multiplicity will be 1 or 2, but +2 for each oxygen molecule.

nproc:

type: int
argument path:
`run_jdata[fp_style=gaussian]/fp_params/nproc`

The number of processors for Gaussian input.

charge:

type: int, optional, default: 0
argument path:
`run_jdata[fp_style=gaussian]/fp_params/charge`

Molecule charge. Only used when charge is not provided by the system.

fragment_guesses:

type: bool, optional, default: False
argument path: `run_jdata[fp_style=gaussian]/fp_params/fragment_guesses`

Initial guess generated from fragment guesses. If True, *multiplicity* should be *auto*.

basis_set:

type: str, optional
argument path:
`run_jdata[fp_style=gaussian]/fp_params/basis_set`

Custom basis set.

keywords_high_multiplicity:

type: str, optional
argument path: `run_jdata[fp_style=gaussian]/fp_params/keywords_high_multiplicity`

Keywords for points with multiple radicals. *multiplicity* should be *auto*. If not set, fallback to normal keywords.

When `fp_style` is set to `siesta`:

use_clusters:

type: bool, optional
argument path: `run_jdata[fp_style=siesta]/use_clusters`

If set to true, clusters will be taken instead of the whole system. This option does not work with DeePMD-kit 0.x.

cluster_cutoff:

type: float, optional
argument path: `run_jdata[fp_style=siesta]/cluster_cutoff`

The cutoff radius of clusters if `use_clusters` is set to true.

fp_params:

type: dict
argument path: run_jdata[fp_style=siesta]/fp_params

Parameters for siesta calculation.

ecut:

type: int
argument path:
run_jdata[fp_style=siesta]/fp_params/ecut

Define the plane wave cutoff for grid.

ediff:

type: float
argument path:
run_jdata[fp_style=siesta]/fp_params/ediff

Tolerance of Density Matrix.

kspacing:

type: float
argument path:
run_jdata[fp_style=siesta]/fp_params/kspacing

Sample factor in Brillouin zones.

mixingWeight:

type: float
argument path:
run_jdata[fp_style=siesta]/fp_params/mixingWeight

Proportion a of output Density Matrix to be used for the input Density Matrix of next SCF cycle (linear mixing).

NumberPulay:

type: int
argument path:
run_jdata[fp_style=siesta]/fp_params/NumberPulay

Controls the Pulay convergence accelerator.

fp_pp_path:

type: str
argument path: run_jdata[fp_style=siesta]/fp_pp_path

Directory of psuedo-potential or numerical orbital files to be used for 02.fp exists.

fp_pp_files:

type: list[str]
argument path: run_jdata[fp_style=siesta]/fp_pp_files

Psuedo-potential file to be used for 02.fp. Note that the order of elements should correspond to the order in type_map.

When `fp_style` is set to cp2k:

user_fp_params:

type: dict, optional, alias: `fp_params`

argument path: `run_jdata[fp_style=cp2k]/user_fp_params`

Parameters for cp2k calculation. find detail in manual.cp2k.org. only the kind section must be set before use. we assume that you have basic knowledge for cp2k input.

external_input_path:

type: str, optional

argument path: `run_jdata[fp_style=cp2k]/external_input_path`

Conflict with key:`user_fp_params`. enable the template input provided by user. some rules should be followed, read the following text in detail:

1. One must present a KEYWORD ABC in the section CELL so that the DP-GEN can replace the cell on-the-fly.
2. One need to add these lines under FORCE_EVAL section to print forces and stresses:

```
STRESS_TENSOR ANALYTICAL
&PRINT
  &FORCES ON
  &END FORCES
  &STRESS_TENSOR ON
  &END STRESS_TENSOR
&END PRINT
```

When `fp_style` is set to abacus:

fp_pp_path:

type: str

argument path: `run_jdata[fp_style=abacus]/fp_pp_path`

Directory of psuedo-potential or numerical orbital files to be used for 02.fp exists.

fp_pp_files:

type: list[str]

argument path: `run_jdata[fp_style=abacus]/fp_pp_files`

Psuedo-potential file to be used for 02.fp. Note that the order of elements should correspond to the order in type_map.

fp_orb_files:

type: list[str], optional

argument path: `run_jdata[fp_style=abacus]/fp_orb_files`

numerical orbital file to be used for 02.fp when using LCAO basis. Note that the order of elements should correspond to the order in type_map.

fp_incar:

type: str, optional

argument path: `run_jdata[fp_style=abacus]/fp_incar`

Input file for ABACUS. This is optional but the priority is lower than `user_fp_params`, and you should not set `user_fp_params` if you want to use `fp_incar`.

fp_kpt_file:

type: `str`, optional

argument path: `run_jdata[fp_style=abacus]/fp_kpt_file`

KPT file for ABACUS. If the “`kspacing`” or “`gamma_only=1`” is defined in INPUT or “`k_points`” is defined, `fp_kpt_file` will be ignored.

fp_dpks_descriptor:

type: `str`, optional

argument path: `run_jdata[fp_style=abacus]/fp_dpks_descriptor`

DeePKS descriptor file name. The file should be in pseudopotential directory.

user_fp_params:

type: `dict`, optional

argument path: `run_jdata[fp_style=abacus]/user_fp_params`

Set the key and value of INPUT.

k_points:

type: `list[int]`, optional

argument path: `run_jdata[fp_style=abacus]/k_points`

Monkhorst-Pack k-grids setting for generating KPT file of ABACUS, such as: [1,1,1,0,0,0]. NB: if “`kspacing`” or “`gamma_only=1`” is defined in INPUT, `k_points` will be ignored.

When `fp_style` is set to `amber/diff`:

Amber/diff style for DPRc models. Note: this fp style only supports to be used with `model_devi_engine amber`, where some arguments are reused. The command argument in the machine file should be path to sander. One should also install dpamber and make it visible in the PATH.

high_level:

type: `str`

argument path: `run_jdata[fp_style=amber/diff]/high_level`

High level method. The value will be filled into mdin template as @qm_theory@.

fp_params:

type: `dict`

argument path: `run_jdata[fp_style=amber/diff]/fp_params`

Parameters for FP calculation.

high_level_mdin:

type: `str`

argument path: `run_jdata[fp_style=amber/diff]/fp_params/high_level_mdin`

Path to high-level AMBER mdin template file. `%qm_theory%`, `%qm_region%`, and `%qm_charge%` will be replaced.

low_level_mdin:

type: `str`

argument path: `run_jdata[fp_style=amber/diff]/fp_params/low_level_mdin`

Path to low-level AMBER mdin template file. `%qm_theory%`, `%qm_region%`, and `%qm_charge%` will be replaced.

When `fp_style` is set to `pwmat`:

TODO: add doc

When `fp_style` is set to `pwscf`:

fp_pp_path:

type: `str`

argument path: `run_jdata[fp_style=pwscf]/fp_pp_path`

Directory of psuedo-potential file to be used for 02.fp exists.

fp_pp_files:

type: `list[str]`

argument path: `run_jdata[fp_style=pwscf]/fp_pp_files`

Psuedo-potential file to be used for 02.fp. Note that the order of elements should correspond to the order in type_map.

fp_params:

type: `dict`, optional

argument path: `run_jdata[fp_style=pwscf]/fp_params`

Parameters for pwscf calculation. It has lower priority than user_fp_params.

ecut:

type: `float`

argument path:

`run_jdata[fp_style=pwscf]/fp_params/ecut`

ecutwfc in pwscf.

ediff:

type: `float`

argument path:

`run_jdata[fp_style=pwscf]/fp_params/ediff`

conv_thr and ts_vdw_econv_thr in pwscf.

smearing:

type: `str`

```
argument path:  
run_jdata[fp_style=pwscf]/fp_params/smearing  
smearing in pwscf.  
sigma:  
    type: float  
    argument path:  
        run_jdata[fp_style=pwscf]/fp_params/sigma  
    degauss in pwscf.  
kspacing:  
    type: float  
    argument path:  
        run_jdata[fp_style=pwscf]/fp_params/kspacing  
    The spacing between kpoints. Helps to determin KPOINTS in  
    pwscf.  
user_fp_params:  
    type: dict, optional  
    argument path: run_jdata[fp_style=pwscf]/user_fp_params  
Parameters for pwscf calculation. Find details at https://www.quantum-espresso.org/Doc/INPUT\_PW.html. When user_fp_params is set, the settings in fp_params will be ignored. If one wants to use user_fp_params, kspacing must be set in user_fp_params. kspacing is the spacing between kpoints, and helps to determin KPOINTS in pwscf.  
  
When fp_style is set to custom:  
Custom FP code. You need to provide the input and output file format and name. The command argument in the machine file should be the script to run custom FP codes. The extra forward and backward files can be defined in the machine file.  
fp_params:  
    type: dict  
    argument path: run_jdata[fp_style=custom]/fp_params  
Parameters for FP calculation.  
input_fmt:  
    type: str  
    argument path:  
        run_jdata[fp_style=custom]/fp_params/input_fmt  
Input dpdata format of the custom FP code. Such format should only need the first argument as the file name.  
input_fn:  
    type: str  
    argument path:  
        run_jdata[fp_style=custom]/fp_params/input_fn  
Input file name of the custom FP code.
```

```
output_fmt:  
    type: str  
    argument path:  
        run_jdata[fp_style=custom]/fp_params/output_fmt  
    Output ddata format of the custom FP code. Such format should only  
    need the first argument as the file name.  
  
output_fn:  
    type: str  
    argument path:  
        run_jdata[fp_style=custom]/fp_params/output_fn  
    Output file name of the custom FP code.
```

4.5 dpgen run machine parameters

Note: One can load, modify, and export the input file by using our effective web-based tool [DP-GUI](#) online or hosted using the [command line interface](#) `dpgen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

```
run_mdata:  
    type: dict  
    argument path: run_mdata  
    machine.json file  
  
api_version:  
    type: str, optional, default: 1.0  
    argument path: run_mdata/api_version  
    Please set to 1.0  
  
deepmd_version:  
    type: str, optional, default: 2  
    argument path: run_mdata/deepmd_version  
    DeePMD-kit version, e.g. 2.1.3  
  
train:  
    type: dict  
    argument path: run_mdata/train  
    Parameters of command, machine, and resources for train  
  
command:  
    type: str  
    argument path: run_mdata/train/command  
    Command of a program.
```

machine:

type: dict
argument path: run_mdata/train/machine

batch_type:

type: str
argument path:
run_mdata/train/machine/batch_type

The batch job system type. Option: SGE, Slurm, Shell, Torque, PBS, Bohrium, OpenAPI, Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path:
run_mdata/train/machine/local_root

The dir where the tasks and relating files locate. Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path:
run_mdata/train/machine/remote_root

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: run_mdata/train/machine/
clean_asynchronously

Clean the remote directory asynchronously after the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)
argument path:
run_mdata/train/machine/context_type
possible choices: *LocalContext*,
LazyLocalContext, *BohriumContext*,
HDF5Context, *SSHContext*, *OpenAPIContext*

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDF5Context, LazyLocalContext, BohriumContext, LocalContext

When *context_type* is set to *LocalContext* (or its aliases *localcontext*, *Local*, *local*):

remote_profile:

type: dict, optional

argument path: `run_mdata/train/machine[LocalContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `LazyLocalContext` (or its aliases `lazylocalcontext`, `LazyLocal`, `lazylocal`):

remote_profile:

type: dict, optional

argument path: `run_mdata/train/machine[LazyLocalContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict

argument path: `run_mdata/train/machine[BohriumContext]/remote_profile`

The information used to maintain the connection with remote machine.

email:

type: str, optional

argument path: `run_mdata/train/machine[BohriumContext]/remote_profile/email`

Email

password:

type: str, optional

argument path: `run_mdata/train/machine[BohriumContext]/remote_profile/password`

Password

program_id:

type: int, alias: `project_id`

argument path: `run_mdata/train/machine[BohriumContext]/remote_profile/program_id`

Program ID

retry_count:

type: `NoneType` | int, optional, default: 2

argument path: run_mdata/train/
machine[BohriumContext]/
remote_profile/retry_count

The retry count when a job is terminated

ignore_exit_code:

type: bool, optional, default: True
argument path: run_mdata/train/
machine[BohriumContext]/
remote_profile/ignore_exit_code

**The job state will be marked as finished if
the exit code is non-zero when set to True.**

Otherwise,

the job state will be designated as termi-
nated.

keep_backup:

type: bool, optional
argument path: run_mdata/train/
machine[BohriumContext]/
remote_profile/keep_backup

keep download and upload zip

input_data:

type: dict
argument path: run_mdata/train/
machine[BohriumContext]/
remote_profile/input_data

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional
argument path: run_mdata/train/
machine[HDFSContext]/remote_profile

The information used to maintain the connection
with remote machine. This field is empty for this
context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
argument path: run_mdata/train/
machine[SSHContext]/remote_profile

The information used to maintain the connection
with remote machine.

```
hostname:  
    type: str  
    argument path: run_mdata/train/  
    machine[SSHContext]/  
    remote_profile/hostname  
    hostname or ip of ssh connection.  
  
username:  
    type: str  
    argument path: run_mdata/train/  
    machine[SSHContext]/  
    remote_profile/username  
    username of target linux system  
  
password:  
    type: str, optional  
    argument path: run_mdata/train/  
    machine[SSHContext]/  
    remote_profile/password  
    (deprecated) password of linux system.  
    Please use SSH keys instead to improve  
    security.  
  
port:  
    type: int, optional, default: 22  
    argument path: run_mdata/train/  
    machine[SSHContext]/  
    remote_profile/port  
    ssh connection port.  
  
key_filename:  
    type: str | NoneType, optional, default:  
    None  
    argument path: run_mdata/train/  
    machine[SSHContext]/  
    remote_profile/key_filename  
    key filename used by ssh connection. If  
    left None, find key in ~/.ssh or use pass-  
    word for login  
  
passphrase:  
    type: str | NoneType, optional, default:  
    None  
    argument path: run_mdata/train/  
    machine[SSHContext]/  
    remote_profile/passphrase  
    passphrase of key used by ssh connection  
  
timeout:  
    type: int, optional, default: 10
```

```

argument path: run_mdata/train/
machine[SSHContext]/
remote_profile/timeout
timeout of ssh connection

totp_secret:
type: str | NoneType, optional, default:
None
argument path: run_mdata/train/
machine[SSHContext]/
remote_profile/totp_secret
Time-based one time password secret. It
should be a base32-encoded string ex-
tracted from the 2D code.

tar_compress:
type: bool, optional, default: True
argument path: run_mdata/train/
machine[SSHContext]/
remote_profile/tar_compress
The archive will be compressed in upload
and download if it is True. If not, com-
pression will be skipped.

look_for_keys:
type: bool, optional, default: True
argument path: run_mdata/train/
machine[SSHContext]/
remote_profile/look_for_keys
enable searching for discoverable private
key files in ~/.ssh/

When context_type is set to OpenAPIContext (or its aliases
openapicontext, OpenAPI, openapi):

remote_profile:
type: dict, optional
argument path: run_mdata/train/
machine[OpenAPIContext]/remote_profile
The information used to maintain the connection
with remote machine. This field is empty for this
context.

resources:
type: dict
argument path: run_mdata/train/resources

number_node:
type: int, optional, default: 1
argument path: run_mdata/train/
resources/number_node

```

The number of node need for each *job*

cpu_per_node:

type: int, optional, default: 1
argument path: run_mdata/train/
resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: run_mdata/train/
resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)
argument path: run_mdata/train/
resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int
argument path: run_mdata/train/
resources/group_size

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: typing.List[str], optional
argument path: run_mdata/train/
resources/custom_flags

The extra lines pass to job submitting script header

strategy:

type: dict, optional
argument path:
run_mdata/train/resources/strategy

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: bool, optional, default: False
argument path: run_mdata/train/
resources/strategy/
if_cuda_multi_devices

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If

true, dpp dispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task. Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:

type: float, optional, default: 0.0
argument path:
run_mdata/train/resources/
strategy/ratio_unfinished

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: str, optional
argument path: run_mdata/train/
resources/strategy/
customized_script_header_template_file

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: int, optional, default: 1
argument path:
run_mdata/train/resources/para_deg
Decide how many tasks will be run in parallel.

source_list:

type: typing.List[str], optional, default:
[]
argument path: run_mdata/train/
resources/source_list

The env file to be sourced before the command execution.

module_purge:

type: bool, optional, default: False
argument path: run_mdata/train/
resources/module_purge

Remove all modules on HPC system before module load (module_list)

module_unload_list:

type: typing.List[str], optional, default:
[]
argument path: run_mdata/train/
resources/module_unload_list

The modules to be unloaded on HPC system before submitting jobs

module_list:

type: typing.List[str], optional, default:
[]

argument path: run_mdata/train/
resources/module_list

The modules to be loaded on HPC system before submitting jobs

envs:

type: dict, optional, default: {}

argument path:
run_mdata/train/resources/envs

The environment variables to be exported on before submitting jobs

prepend_script:

type: typing.List[str], optional, default:
[]

argument path: run_mdata/train/
resources/prepend_script

Optional script run before jobs submitted.

append_script:

type: typing.List[str], optional, default:
[]

argument path: run_mdata/train/
resources/append_script

Optional script run after jobs submitted.

wait_time:

type: float | int, optional, default: 0

argument path:
run_mdata/train/resources/wait_time

The waiting time in second after a single *task* submitted

Depending on the value of *batch_type*, different sub args are accepted.

batch_type:

type: str (flag key)

argument path: run_mdata/train/
resources/batch_type

possible choices: *OpenAPI*,
DistributedShell, *Bohrium*, *Fugaku*,
Slurm, *SlurmJobArray*, *LSF*, *Shell*, *PBS*,
SGE, *Torque*

The batch job system type loaded from machine/batch_type.

When `batch_type` is set to OpenAPI (or its alias `openapi`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[OpenAPI]/kwargs

This field is empty for this batch.

When `batch_type` is set to DistributedShell (or its alias `distributedshell`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[DistributedShell]/kwargs

This field is empty for this batch.

When `batch_type` is set to Bohrium (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[Bohrium]/kwargs

This field is empty for this batch.

When `batch_type` is set to Fugaku (or its alias `fugaku`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[Fugaku]/kwargs

This field is empty for this batch.

When `batch_type` is set to Slurm (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[Slurm]/kwargs

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: run_mdata/train/resources[Slurm]/kwargs/
custom_gpu_line

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional
argument path: `run_mdata/train/resources[SlurmJobArray]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `run_mdata/train/resources[SlurmJobArray]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:

type: int, optional, default: 1
argument path: `run_mdata/train/resources[SlurmJobArray]/kwargs/slurm_job_size`

Number of tasks in a Slurm job

When `batch_type` is set to LSF (or its alias `lsf`):

kwargs:

type: dict
argument path: `run_mdata/train/resources[LSF]/kwargs`

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path: `run_mdata/train/resources[LSF]/kwargs/gpu_usage`

Choosing if GPU is used in the calcu-
lation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path: `run_mdata/train/resources[LSF]/kwargs/gpu_new_syntax`

For LFS >= 10.1.0.3, new option -gpu
for #BSUB could be used. If False,
and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path: run_mdata/train/resources[LSF]/kwargs/gpu_exclusive

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: run_mdata/train/resources[LSF]/kwargs/custom_gpu_line

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to `Shell` (or its alias `shell`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[Shell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `PBS` (or its alias `pbs`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to `SGE` (or its alias `sge`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Torque` (or its alias `torque`):

kwargs:

type: dict, optional
argument path: run_mdata/train/resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path: run_mdata/train/user_forward_files
Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
argument path:
run_mdata/train/user_backward_files
Files to be backwarded from the remote machine.

model_devi:

type: dict
argument path: run_mdata/model_devi
Parameters of command, machine, and resources for model_devi

command:

type: str
argument path: run_mdata/model_devi/command
Command of a program.

machine:

type: dict
argument path: run_mdata/model_devi/machine

batch_type:

type: str
argument path: run_mdata/model_devi/
machine/batch_type

The batch job system type. Option: SGE,
Slurm, Shell, Torque, PBS, Bohrium, OpenAPI,
Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path: run_mdata/model_devi/
machine/local_root

The dir where the tasks and relating files locate.
Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path: run_mdata/model_devi/
machine/remote_root

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: run_mdata/model_devi/
machine/clean_asynchronously

Clean the remote directory asynchronously af-
ter the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)
argument path: run_mdata/model_devi/
machine/context_type
possible choices: *LocalContext*,
LazyLocalContext, *BohriumContext*,
HDFSContext, *SSHContext*,
OpenAPIContext

The connection used to remote machine. Op-
tion: OpenAPIContext, SSHContext, HDFS-
Context, LazyLocalContext, BohriumContext,
LocalContext

When *context_type* is set to *LocalContext* (or its aliases
localcontext, *Local*, *local*):

remote_profile:

type: dict, optional
argument path: run_mdata/model_devi/
machine[*LocalContext*]/
remote_profile

The information used to maintain the connec-
tion with remote machine. This field is empty
for this context.

When *context_type* is set to *LazyLocalContext* (or its
aliases *lazylocalcontext*, *LazyLocal*, *lazyllocal*):

remote_profile:

type: dict, optional
argument path: run_mdata/model_devi/
machine[*LazyLocalContext*]/
remote_profile

The information used to maintain the connec-
tion with remote machine. This field is empty
for this context.

When *context_type* is set to *BohriumContext* (or
its aliases *bohriumcontext*, *Bohrium*, *bohrium*,
DpCloudServerContext, *dpcloudservercontext*,
DpCloudServer, *dpcloudserver*, *LebesgueContext*,
lebesguecontext, *Lebesgue*, *lebesgue*):

```
remote_profile:
    type: dict
    argument path: run_mdata/model_devi/
                    machine[BohriumContext]/
                    remote_profile

    The information used to maintain the connection with remote machine.

email:
    type: str, optional
    argument path:
        run_mdata/model_devi/
        machine[BohriumContext]/
        remote_profile/email

    Email

password:
    type: str, optional
    argument path:
        run_mdata/model_devi/
        machine[BohriumContext]/
        remote_profile/password

    Password

program_id:
    type: int, alias: project_id
    argument path:
        run_mdata/model_devi/
        machine[BohriumContext]/
        remote_profile/program_id

    Program ID

retry_count:
    type: NoneType | int, optional,
    default: 2
    argument path:
        run_mdata/model_devi/
        machine[BohriumContext]/
        remote_profile/retry_count

    The retry count when a job is terminated

ignore_exit_code:
    type: bool, optional, default: True
    argument path:
        run_mdata/model_devi/
        machine[BohriumContext]/
        remote_profile/
        ignore_exit_code
```

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:

type: bool, optional
 argument path:
 run_mdata/model_devi/
 machine[BohriumContext]/
 remote_profile/keep_backup
 keep download and upload zip

input_data:

type: dict
 argument path:
 run_mdata/model_devi/
 machine[BohriumContext]/
 remote_profile/input_data

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional
 argument path: `run_mdata/model_devi/`
`machine[HDFSContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
 argument path: `run_mdata/model_devi/`
`machine[SSHContext]/remote_profile`

The information used to maintain the connection with remote machine.

hostname:

type: str
 argument path:
 run_mdata/model_devi/
 machine[SSHContext]/
 remote_profile/hostname

hostname or ip of ssh connection.

```
username:
    type: str
    argument path:
        run_mdata/model_devi/
        machine[SSHContext]/
        remote_profile/username
    username of target linux system

password:
    type: str, optional
    argument path:
        run_mdata/model_devi/
        machine[SSHContext]/
        remote_profile/password
    (deprecated) password of linux system. Please use SSH keys instead to improve security.

port:
    type: int, optional, default: 22
    argument path:
        run_mdata/model_devi/
        machine[SSHContext]/
        remote_profile/port
    ssh connection port.

key_filename:
    type: str | NoneType, optional,
    default: None
    argument path:
        run_mdata/model_devi/
        machine[SSHContext]/
        remote_profile/key_filename
    key filename used by ssh connection.
    If left None, find key in ~/.ssh or use password for login

passphrase:
    type: str | NoneType, optional,
    default: None
    argument path:
        run_mdata/model_devi/
        machine[SSHContext]/
        remote_profile/passphrase
    passphrase of key used by ssh connection

timeout:
    type: int, optional, default: 10
    argument path:
        run_mdata/model_devi/
```

```
machine[SSHContext]/
remote_profile/timeout
timeout of ssh connection

totp_secret:
    type: str | NoneType, optional,
    default: None
    argument path:
        run_mdata/model_devi/
        machine[SSHContext]/
        remote_profile/totp_secret
    Time-based one time password secret. It should be a base32-encoded string extracted from the 2D code.

tar_compress:
    type: bool, optional, default: True
    argument path:
        run_mdata/model_devi/
        machine[SSHContext]/
        remote_profile/tar_compress
    The archive will be compressed in upload and download if it is True. If not, compression will be skipped.

look_for_keys:
    type: bool, optional, default: True
    argument path:
        run_mdata/model_devi/
        machine[SSHContext]/
        remote_profile/look_for_keys
    enable searching for discoverable private key files in ~/.ssh/

When context_type is set to OpenAPIContext (or its aliases openapicontext, OpenAPI, openapi):

remote_profile:
    type: dict, optional
    argument path: run_mdata/model_devi/
        machine[OpenAPIContext]/
        remote_profile
    The information used to maintain the connection with remote machine. This field is empty for this context.

resources:
    type: dict
    argument path: run_mdata/model_devi/resources
```

number_node:

type: int, optional, default: 1
argument path: run_mdata/model_devi/resources/number_node

The number of node need for each *job*

cpu_per_node:

type: int, optional, default: 1
argument path: run_mdata/model_devi/resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: run_mdata/model_devi/resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)
argument path: run_mdata/model_devi/resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int
argument path: run_mdata/model_devi/resources/group_size

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: typing.List[str], optional
argument path: run_mdata/model_devi/resources/custom_flags

The extra lines pass to job submitting script header

strategy:

type: dict, optional
argument path: run_mdata/model_devi/resources/strategy

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: bool, optional, default: False

argument path:
run_mdata/model_devi/
resources/strategy/
if_cuda_multi_devices

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, dpdispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task.Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:

type: float, optional, default: 0.0
argument path: run_mdata/
model_devi/resources/
strategy/ratio_unfinished

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: str, optional
argument path:
run_mdata/model_devi/
resources/strategy/
customized_script_header_template_file

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: int, optional, default: 1
argument path: run_mdata/model_devi/
resources/para_deg

Decide how many tasks will be run in parallel.

source_list:

type: typing.List[str], optional, default:
[]
argument path: run_mdata/model_devi/
resources/source_list

The env file to be sourced before the command execution.

module_purge:

type: bool, optional, default: False
argument path: run_mdata/model_devi/
resources/module_purge

Remove all modules on HPC system before module load (module_list)

module_unload_list:

type: typing.List[str], optional, default: []

argument path: run_mdata/model_devi/resources/module_unload_list

The modules to be unloaded on HPC system before submitting jobs

module_list:

type: typing.List[str], optional, default: []

argument path: run_mdata/model_devi/resources/module_list

The modules to be loaded on HPC system before submitting jobs

envs:

type: dict, optional, default: {}

argument path: run_mdata/model_devi/resources/envs

The environment variables to be exported on before submitting jobs

prepend_script:

type: typing.List[str], optional, default: []

argument path: run_mdata/model_devi/resources/prepend_script

Optional script run before jobs submitted.

append_script:

type: typing.List[str], optional, default: []

argument path: run_mdata/model_devi/resources/append_script

Optional script run after jobs submitted.

wait_time:

type: float | int, optional, default: 0

argument path: run_mdata/model_devi/resources/wait_time

The waiting time in second after a single *task* submitted

Depending on the value of *batch_type*, different sub args are accepted.

batch_type:

type: str (flag key)
argument path: run_mdata/model_devi/
resources/batch_type
possible choices: *OpenAPI*,
DistributedShell, *Bohrium*, *Fugaku*,
Slurm, *SlurmJobArray*, *LSF*, *Shell*, *PBS*,
SGE, *Torque*

The batch job system type loaded from machine/batch_type.

When `batch_type` is set to `OpenAPI` (or its alias `openapi`):

kwargs:

type: dict, optional
argument path: run_mdata/model_devi/
resources[`OpenAPI`]/kwargs

This field is empty for this batch.

When `batch_type` is set to `DistributedShell` (or its alias `distributedshell`):

kwargs:

type: dict, optional
argument path: run_mdata/model_devi/
resources[`DistributedShell`]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Bohrium` (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: dict, optional
argument path: run_mdata/model_devi/
resources[`Bohrium`]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Fugaku` (or its alias `fugaku`):

kwargs:

type: dict, optional
argument path: run_mdata/model_devi/
resources[`Fugaku`]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: dict, optional

argument path: `run_mdata/model_devi/resources[Slurm]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,

default: None

argument path: `run_mdata/model_devi/resources[Slurm]/kwargs/custom_gpu_line`

Custom GPU configuration, starting with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional

argument path: `run_mdata/model_devi/resources[SlurmJobArray]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None

argument path:
`run_mdata/model_devi/resources[SlurmJobArray]/kwargs/custom_gpu_line`

Custom GPU configuration, starting with #SBATCH

slurm_job_size:

type: int, optional, default: 1

argument path:
`run_mdata/model_devi/resources[SlurmJobArray]/kwargs/slurm_job_size`

Number of tasks in a Slurm job

When `batch_type` is set to LSF (or its alias `lsf`):

kwargs:

type: dict

argument path: `run_mdata/model_devi/resources[LSF]/kwargs`

Extra arguments.

gpu_usage:

type: bool, optional, default: False

argument path: `run_mdata/model_devi/resources[LSF]/kwargs/gpu_usage`

Choosing if GPU is used in the calculation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path: `run_mdata/model_devi/resources[LSF]/kwargs/gpu_new_syntax`

For LFS >= 10.1.0.3, new option -gpu for #BSUB could be used. If False, and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path: `run_mdata/model_devi/resources[LSF]/kwargs/gpu_exclusive`

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `run_mdata/model_devi/resources[LSF]/kwargs/custom_gpu_line`

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to Shell (or its alias shell):

kwargs:

type: dict, optional
argument path: `run_mdata/model_devi/resources[Shell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to PBS (or its alias pbs):

kwargs:

type: dict, optional
argument path: `run_mdata/model_devi/resources[PBS]/kwargs`

This field is empty for this batch.

When `batch_type` is set to SGE (or its alias sge):

kwargs:

type: dict, optional
argument path: run_mdata/model_devi/resources[SGE]/kwargs

This field is empty for this batch.

When batch_type is set to Torque (or its alias torque):

kwargs:

type: dict, optional
argument path: run_mdata/model_devi/resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path:
run_mdata/model_devi/user_forward_files

Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
argument path:
run_mdata/model_devi/user_backward_files

Files to be backwarded from the remote machine.

fp:

type: dict
argument path: run_mdata/fp

Parameters of command, machine, and resources for fp

command:

type: str
argument path: run_mdata/fp/command
Command of a program.

machine:

type: dict
argument path: run_mdata/fp/machine

batch_type:

type: str
argument path:
run_mdata/fp/machine/batch_type

The batch job system type. Option: SGE, Slurm, Shell, Torque, PBS, Bohrium, OpenAPI, Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path:
`run_mdata/fp/machine/local_root`

The dir where the tasks and relating files locate.
Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path:
`run_mdata/fp/machine/remote_root`

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: `run_mdata/fp/machine/clean_asynchronously`

Clean the remote directory asynchronously after the job finishes.

Depending on the value of `context_type`, different sub args are accepted.

context_type:

type: str (flag key)
argument path:
`run_mdata/fp/machine/context_type`
possible choices: `LocalContext`,
`LazyLocalContext`, `BohriumContext`,
`HDFSContext`, `SSHContext`,
`OpenAPIContext`

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFSContext, LazyLocalContext, BohriumContext, LocalContext

When `context_type` is set to `LocalContext` (or its aliases `localcontext`, `Local`, `local`):

remote_profile:

type: dict, optional
argument path:
`run_mdata/fp/machine[LocalContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `LazyLocalContext` (or its aliases `lazylocalcontext`, `LazyLocal`, `lazylocal`):

remote_profile:

type: dict, optional
argument path: `run_mdata/fp/machine[LazyLocalContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict
argument path: `run_mdata/fp/machine[BohriumContext]/remote_profile`

The information used to maintain the connection with remote machine.

email:

type: str, optional
argument path: `run_mdata/fp/machine[BohriumContext]/remote_profile/email`

Email

password:

type: str, optional
argument path: `run_mdata/fp/machine[BohriumContext]/remote_profile/password`

Password

program_id:

type: int, alias: `project_id`
argument path: `run_mdata/fp/machine[BohriumContext]/remote_profile/program_id`

Program ID

retry_count:

type: NoneType | int, optional,
default: 2

argument path: `run_mdata/fp/machine[BohriumContext]/remote_profile/retry_count`

The retry count when a job is terminated

ignore_exit_code:

type: bool, optional, default: True
argument path: `run_mdata/fp/machine[BohriumContext]/remote_profile/ignore_exit_code`

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:

type: bool, optional
argument path: `run_mdata/fp/machine[BohriumContext]/remote_profile/keep_backup`
keep download and upload zip

input_data:

type: dict
argument path: `run_mdata/fp/machine[BohriumContext]/remote_profile/input_data`

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional
argument path: `run_mdata/fp/machine[HDFSContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
argument path: `run_mdata/fp/machine[SSHContext]/remote_profile`

The information used to maintain the connection with remote machine.

```
hostname:  
    type: str  
    argument path: run_mdata/fp/  
    machine[SSHContext]/  
    remote_profile/hostname  
    hostname or ip of ssh connection.  
  
username:  
    type: str  
    argument path: run_mdata/fp/  
    machine[SSHContext]/  
    remote_profile/username  
    username of target linux system  
  
password:  
    type: str, optional  
    argument path: run_mdata/fp/  
    machine[SSHContext]/  
    remote_profile/password  
    (deprecated) password of linux sys-  
    tem. Please use SSH keys instead to  
    improve security.  
  
port:  
    type: int, optional, default: 22  
    argument path: run_mdata/fp/  
    machine[SSHContext]/  
    remote_profile/port  
    ssh connection port.  
  
key_filename:  
    type: str | NoneType, optional,  
    default: None  
    argument path: run_mdata/fp/  
    machine[SSHContext]/  
    remote_profile/key_filename  
    key filename used by ssh connection.  
    If left None, find key in ~/.ssh or use  
    password for login  
  
passphrase:  
    type: str | NoneType, optional,  
    default: None  
    argument path: run_mdata/fp/  
    machine[SSHContext]/  
    remote_profile/passphrase  
    passphrase of key used by ssh connec-  
    tion  
  
timeout:  
    type: int, optional, default: 10
```

argument path: `run_mdata/fp/machine[SSHContext]/remote_profile/timeout`

timeout of ssh connection

totp_secret:

type: str | NoneType, optional,
default: None

argument path: `run_mdata/fp/machine[SSHContext]/remote_profile/totp_secret`

Time-based one time password secret. It should be a base32-encoded string extracted from the 2D code.

tar_compress:

type: bool, optional, default: True
argument path: `run_mdata/fp/machine[SSHContext]/remote_profile/tar_compress`

The archive will be compressed in upload and download if it is True. If not, compression will be skipped.

look_for_keys:

type: bool, optional, default: True
argument path: `run_mdata/fp/machine[SSHContext]/remote_profile/look_for_keys`

enable searching for discoverable private key files in `~/.ssh/`

When `context_type` is set to `OpenAPIContext` (or its aliases `openapicontext`, `OpenAPI`, `openapi`):

remote_profile:

type: dict, optional
argument path: `run_mdata/fp/machine[OpenAPIContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

resources:

type: dict
argument path: `run_mdata/fp/resources`

number_node:

type: int, optional, default: 1

argument path:
run_mdata/fp/resources/number_node

The number of node need for each *job*

cpu_per_node:

type: int, optional, default: 1

argument path:

run_mdata/fp/resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0

argument path:

run_mdata/fp/resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)

argument path:

run_mdata/fp/resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int

argument path:

run_mdata/fp/resources/group_size

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: typing.List[str], optional

argument path:

run_mdata/fp/resources/custom_flags

The extra lines pass to job submitting script header

strategy:

type: dict, optional

argument path:

run_mdata/fp/resources/strategy

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: bool, optional, default: False

argument path: run_mdata/fp/

resources/strategy/

if_cuda_multi_devices

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, dpp dispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task.Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:

type: float, optional, default: 0.0
argument path:
run_mdata/fp/resources/
strategy/ratio_unfinished

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: str, optional
argument path: run_mdata/fp/
resources/strategy/
customized_script_header_template_file

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: int, optional, default: 1
argument path:
run_mdata/fp/resources/para_deg

Decide how many tasks will be run in parallel.

source_list:

type: typing.List[str], optional, default:
[]
argument path:
run_mdata/fp/resources/source_list

The env file to be sourced before the command execution.

module_purge:

type: bool, optional, default: False
argument path:
run_mdata/fp/resources/module_purge

Remove all modules on HPC system before module load (module_list)

module_unload_list:

type: typing.List[str], optional, default:

[]

argument path: run_mdata/fp/resources/module_unload_list

The modules to be unloaded on HPC system before submitting jobs

module_list:

type: typing.List[str], optional, default:

[]

argument path: run_mdata/fp/resources/module_list

The modules to be loaded on HPC system before submitting jobs

envs:

type: dict, optional, default: {}

argument path:

run_mdata/fp/resources/envs

The environment variables to be exported on before submitting jobs

prepend_script:

type: typing.List[str], optional, default:

[]

argument path: run_mdata/fp/resources/prepend_script

Optional script run before jobs submitted.

append_script:

type: typing.List[str], optional, default:

[]

argument path: run_mdata/fp/resources/append_script

Optional script run after jobs submitted.

wait_time:

type: float | int, optional, default: 0

argument path:

run_mdata/fp/resources/wait_time

The waiting time in second after a single *task* submitted

Depending on the value of *batch_type*, different sub args are accepted.

batch_type:

type: str (flag key)

argument path:
run_mdata/fp/resources/batch_type
possible choices: *OpenAPI*,
DistributedShell, *Bohrium*, *Fugaku*,
Slurm, *SlurmJobArray*, *LSF*, *Shell*, *PBS*,
SGE, *Torque*

The batch job system type loaded from machine/batch_type.

When `batch_type` is set to `OpenAPI` (or its alias `openapi`):

kwargs:

type: dict, optional
argument path: run_mdata/fp/
resources[OpenAPI]/kwargs

This field is empty for this batch.

When `batch_type` is set to `DistributedShell` (or its alias `distributedshell`):

kwargs:

type: dict, optional
argument path: run_mdata/fp/
resources[DistributedShell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Bohrium` (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: dict, optional
argument path: run_mdata/fp/
resources[Bohrium]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Fugaku` (or its alias `fugaku`):

kwargs:

type: dict, optional
argument path: run_mdata/fp/
resources[Fugaku]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: run_mdata/fp/
resources[Slurm]/kwargs

Extra arguments.

custom_gpu_line:
type: str | NoneType, optional,
default: None
argument path: run_mdata/fp/
resources[Slurm]/kwargs/
custom_gpu_line

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional
argument path: run_mdata/fp/
resources[SlurmJobArray]/kwargs

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: run_mdata/fp/
resources[SlurmJobArray]/
kwargs/custom_gpu_line

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:

type: int, optional, default: 1
argument path: run_mdata/fp/
resources[SlurmJobArray]/
kwargs/slurm_job_size

Number of tasks in a Slurm job

When `batch_type` is set to LSF (or its alias `lsf`):

kwargs:

type: dict
argument path:
run_mdata/fp/resources[LSF]/kwargs

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path:
run_mdata/fp/resources[LSF]/
kwargs/gpu_usage

Choosing if GPU is used in the calcu-
lation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path:
run_mdata/fp/resources[LSF]/
kwargs/gpu_new_syntax

For LFS >= 10.1.0.3, new option -gpu for #BSUB could be used. If False, and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path:
run_mdata/fp/resources[LSF]/
kwargs/gpu_exclusive

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
run_mdata/fp/resources[LSF]/
kwargs/custom_gpu_line

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to `Shell` (or its alias `shell`):

kwargs:

type: dict, optional
argument path: run_mdata/fp/
resources[Shell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `PBS` (or its alias `pbs`):

kwargs:

type: dict, optional
argument path:
run_mdata/fp/resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to `SGE` (or its alias `sge`):

kwargs:

type: dict, optional
argument path:
run_mdata/fp/resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Torque` (or its alias `torque`):

kwargs:

type: dict, optional
argument path: run_mdata/fp/
resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path: run_mdata/fp/user_forward_files

Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
argument path: run_mdata/fp/user_backward_files

Files to be backwarded from the remote machine.

5.1 Init_bulk

You may prepare initial data for bulk systems with VASP by:

```
dpgen init_bulk PARAM [MACHINE]
```

The MACHINE configure file is optional. If this parameter exists, then the optimization tasks or MD tasks will be submitted automatically according to MACHINE.json.

Basically `init_bulk` can be divided into four parts , denoted as `stages` in PARAM:

1. Relax in folder `00.place_ele`
2. Perturb and scale in folder `01.scale_pert`
3. Run a short AIMD in folder `02.md`
4. Collect data in folder `02.md`.

All stages must be **in order**. One doesn't need to run all stages. For example, you may run stage 1 and 2, generating supercells as starting point of exploration in `dpgen run`.

If MACHINE is None, there should be only one stage in stages. Corresponding tasks will be generated, but user's intervention should be involved in, to manually run the scripts.

Following is an example for PARAM, which generates data from a typical structure hcp.

```
{
  "stages" : [1, 2, 3, 4],
  "cell_type": "hcp",
  "latt": 4.479,
  "super_cell": [2, 2, 2],
  "elements": ["Mg"],
  "potcars": ["...../POTCAR"],
  "relax_incar": "...../INCAR_metal_rlx",
  "md_incar" : "...../INCAR_metal_md",
  "scale": [1.00],
  "skip_relax": false,
  "pert_numb": 2,
  "md_nstep" : 5,
  "pert_box": 0.03,
  "pert_atom": 0.01,
  "coll_ndata": 5000,
  "type_map" : [ "Mg", "Al"],
```

(continues on next page)

(continued from previous page)

```
"_comment": "that's all"  
}
```

If you want to specify a structure as starting point for `init_bulk`, you may set in PARAM as follows.

```
"from_poscar": true,  
"from_poscar_path": "...../C_mp-47_conventional.POSCAR",
```

`init_bulk` supports both VASP and ABACUS for first-principle calculation. You can choose the software by specifying the key `init_fp_style`. If `init_fp_style` is not specified, the default software will be VASP.

When using ABACUS for `init_fp_style`, the keys of the paths of INPUT files for relaxation and MD simulations are the same as INCAR for VASP, which are `relax_incar` and `md_incar` respectively. Use `relax_kpt` and `md_kpt` for the relative path for KPT files of relaxation and MD simulations. They two can be omitted if `kspacing` (in unit of 1/Bohr) or `gamma_only` has been set in corresponding INPUT files. If `from_poscar` is set to false, you have to specify `atom_masses` in the same order as `elements`.

5.2 dpgen init_bulk parameters

Note: One can load, modify, and export the input file by using our effective web-based tool DP-GUI online or hosted using the *command line interface* dpgen gui. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

```
init_bulk_jdata:  
    type: dict  
    argument path: init_bulk_jdata  
    Generate initial data for bulk systems.  
  
    stages:  
        type: list[int]  
        argument path: init_bulk_jdata/stages  
        Stages for init_bulk.  
  
    elements:  
        type: list[str]  
        argument path: init_bulk_jdata/elements  
        Atom types.  
  
    potcars:  
        type: list[str], optional  
        argument path: init_bulk_jdata/potcars  
        Path of POTCAR.  
  
    cell_type:  
        type: str, optional  
        argument path: init_bulk_jdata/cell_type  
        Specifying which typical structure to be generated. Options include fcc, hcp, bcc, sc, diamond.
```

```

super_cell:
    type: list[int]
    argument path: init_bulk_jdata/super_cell
    Size of supercell.

from_poscar:
    type: bool, optional, default: False
    argument path: init_bulk_jdata/from_poscar
    Deciding whether to use a given poscar as the beginning of relaxation. If it's true,
    keys (cell_type, latt) will be aborted. Otherwise, these two keys are necessary.

from_poscar_path:
    type: str, optional
    argument path: init_bulk_jdata/from_poscar_path
    Path of POSCAR for VASP or STRU for ABACUS. Necessary if from_poscar is
    true.

relax_incar:
    type: str, optional
    argument path: init_bulk_jdata/relax_incar
    Path of INCAR for VASP or INPUT for ABACUS for relaxation in VASP. Nec-
    essary if stages include 1.

md_incar:
    type: str, optional
    argument path: init_bulk_jdata/md_incar
    Path of INCAR for VASP or INPUT for ABACUS for MD in VASP. Necessary
    if stages include 3.

scale:
    type: list[float]
    argument path: init_bulk_jdata/scale
    Scales for isotropic transforming cells.

skip_relax:
    type: bool
    argument path: init_bulk_jdata/skip_relax
    If it's true, you may directly run stage 2 (perturb and scale) using an unrelaxed
    POSCAR.

pert_numb:
    type: int
    argument path: init_bulk_jdata/pert_numb
    Number of perturbations for each scaled (key scale) POSCAR.

pert_box:
    type: float
    argument path: init_bulk_jdata/pert_box

```

Anisotropic Perturbation for cells (independent changes of lengths of three box vectors as well as angle among) in decimal formats. 9 elements of the 3x3 perturbation matrix will be randomly sampled from a uniform distribution (default) in the range [-pert_box, pert_box]. Such a perturbation matrix adds the identity matrix gives the actual transformation matrix for this perturbation operation.

pert_atom:

type: float

argument path: init_bulk_jdata/pert_atom

Perturbation of atom coordinates (Angstrom). Random perturbations are performed on three coordinates of each atom by adding values randomly sampled from a uniform distribution in the range [-pert_atom, pert_atom].

md_nstep:

type: int

argument path: init_bulk_jdata/md_nstep

Steps of AIMD in stage 3. If it's not equal to settings via *NSW* in *md_incar*, DP-GEN will follow *NSW*.

coll_ndata:

type: int

argument path: init_bulk_jdata/coll_ndata

Maximal number of collected data.

type_map:

type: list[str], optional

argument path: init_bulk_jdata/type_map

The indices of elements in deepmd formats will be set in this order.

Depending on the value of *init_fp_style*, different sub args are accepted.

init_fp_style:

type: str (flag key), default: VASP

argument path: init_bulk_jdata/init_fp_style

possible choices: [VASP](#), [ABACUS](#)

First-principle software. If this key is absent.

When *init_fp_style* is set to VASP:

No more parameters is needed to be added.

When *init_fp_style* is set to ABACUS:

ABACUS

relax_kpt:

type: str, optional

argument path: init_bulk_jdata[ABACUS]/relax_kpt

Path of *KPT* file for relaxation in stage 1. Only useful if *init_fp_style* is “ABACUS”.

md_kpt:

type: str, optional

argument path: `init_bulk_jdata[ABACUS]/md_kpt`
Path of *KPT* file for MD simulations in stage 3. Only useful if *init_fp_style* is “ABACUS”.

atom_masses:

type: `list[float]`, optional
argument path: `init_bulk_jdata[ABACUS]/atom_masses`
List of atomic masses of elements. The order should be the same as *Elements*.
Only useful if *init_fp_style* is “ABACUS”.

5.3 dpgen init_bulk machine parameters

Note: One can load, modify, and export the input file by using our effective web-based tool DP-GUI online or hosted using the *command line interface* `dpgen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

init_bulk_mdata:

type: `dict`
argument path: `init_bulk_mdata`
machine.json file

api_version:

type: `str`, optional, default: 1.0
argument path: `init_bulk_mdata/api_version`
Please set to 1.0

deepmd_version:

type: `str`, optional, default: 2
argument path: `init_bulk_mdata/deepmd_version`
DeePMD-kit version, e.g. 2.1.3

fp:

type: `dict`
argument path: `init_bulk_mdata/fp`
Parameters of command, machine, and resources for fp

command:

type: `str`
argument path: `init_bulk_mdata/fp/command`
Command of a program.

machine:

type: `dict`
argument path: `init_bulk_mdata/fp/machine`

batch_type:

type: str
argument path: init_bulk_mdata/fp/
machine/batch_type

The batch job system type. Option: SGE,
Slurm, Shell, Torque, PBS, Bohrium, OpenAPI,
Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path: init_bulk_mdata/fp/
machine/local_root

The dir where the tasks and relating files locate.
Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path: init_bulk_mdata/fp/
machine/remote_root

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: init_bulk_mdata/fp/
machine/clean_asynchronously

Clean the remote directory asynchronously after the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)
argument path: init_bulk_mdata/fp/
machine/context_type
possible choices: *LocalContext*,
LazyLocalContext, *BohriumContext*,
HDFSContext, *SSHContext*,
OpenAPIContext

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFSContext, LazyLocalContext, BohriumContext, LocalContext

When *context_type* is set to *LocalContext* (or its aliases *localcontext*, *Local*, *local*):

remote_profile:

type: dict, optional
argument path: init_bulk_mdata/fp/
machine[LocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `LazyLocalContext` (or its aliases `lazylocalcontext`, `LazyLocal`, `lazylocal`):

remote_profile:

type: dict, optional
argument path: init_bulk_mdata/fp/
machine[LazyLocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict
argument path: init_bulk_mdata/fp/
machine[BohriumContext]/
remote_profile

The information used to maintain the connection with remote machine.

email:

type: str, optional
argument path: init_bulk_mdata/
fp/machine[BohriumContext]/
remote_profile/email

Email

password:

type: str, optional
argument path: init_bulk_mdata/
fp/machine[BohriumContext]/
remote_profile/password

Password

program_id:

type: int, alias: `project_id`

argument path: `init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/program_id`

Program ID

retry_count:

type: `NoneType | int`, optional,
default: 2
argument path: `init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/retry_count`

The retry count when a job is terminated

ignore_exit_code:

type: `bool`, optional, default: `True`
argument path: `init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/ignore_exit_code`

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:

type: `bool`, optional
argument path: `init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/keep_backup`

keep download and upload zip

input_data:

type: `dict`
argument path: `init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/input_data`

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: `dict`, optional
argument path: `init_bulk_mdata/fp/machine[HDFSContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
argument path: `init_bulk_mdata/fp/machine[SSHContext]/remote_profile`

The information used to maintain the connection with remote machine.

hostname:

type: str
argument path: `init_bulk_mdata/fp/machine[SSHContext]/remote_profile/hostname`

hostname or ip of ssh connection.

username:

type: str
argument path: `init_bulk_mdata/fp/machine[SSHContext]/remote_profile/username`

username of target linux system

password:

type: str, optional
argument path: `init_bulk_mdata/fp/machine[SSHContext]/remote_profile/password`

(deprecated) password of linux system. Please use `SSH keys` instead to improve security.

port:

type: int, optional, default: 22
argument path: `init_bulk_mdata/fp/machine[SSHContext]/remote_profile/port`

ssh connection port.

key_filename:

type: str | NoneType, optional,
default: None
argument path: `init_bulk_mdata/fp/machine[SSHContext]/remote_profile/key_filename`

key filename used by ssh connection.
If left None, find key in `~/.ssh` or use password for login

passphrase:

type: str | NoneType, optional,
default: None
argument path: init_bulk_mdata/
fp/machine[SSHContext]/
remote_profile/passphrase

passphrase of key used by ssh connec-
tion

timeout:

type: int, optional, default: 10
argument path: init_bulk_mdata/
fp/machine[SSHContext]/
remote_profile/timeout

timeout of ssh connection

totp_secret:

type: str | NoneType, optional,
default: None
argument path: init_bulk_mdata/
fp/machine[SSHContext]/
remote_profile/totp_secret

Time-based one time password se-
cret. It should be a base32-encoded
string extracted from the 2D code.

tar_compress:

type: bool, optional, default: True
argument path: init_bulk_mdata/
fp/machine[SSHContext]/
remote_profile/tar_compress

The archive will be compressed in up-
load and download if it is True. If not,
compression will be skipped.

look_for_keys:

type: bool, optional, default: True
argument path: init_bulk_mdata/
fp/machine[SSHContext]/
remote_profile/look_for_keys

enable searching for discoverable pri-
vate key files in ~/.ssh/

When `context_type` is set to `OpenAPIContext` (or its aliases
`openapicontext`, `OpenAPI`, `openapi`):

remote_profile:

type: dict, optional
argument path: init_bulk_mdata/fp/
machine[OpenAPIContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

resources:

type: dict
argument path: init_bulk_mdata/fp/resources

number_node:

type: int, optional, default: 1
argument path: init_bulk_mdata/fp/resources/number_node

The number of node need for each *job*

cpu_per_node:

type: int, optional, default: 1
argument path: init_bulk_mdata/fp/resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: init_bulk_mdata/fp/resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)
argument path: init_bulk_mdata/fp/resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int
argument path: init_bulk_mdata/fp/resources/group_size

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: typing.List[str], optional
argument path: init_bulk_mdata/fp/resources/custom_flags

The extra lines pass to job submitting script header

strategy:

type: dict, optional

argument path: `init_bulk_mdata/fp/resources/strategy`

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: bool, optional, default: False
argument path: `init_bulk_mdata/fp/resources/strategy/if_cuda_multi_devices`

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, dpdispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task.Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:

type: float, optional, default: 0.0
argument path: `init_bulk_mdata/fp/resources/strategy/ratio_unfinished`

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: str, optional
argument path: `init_bulk_mdata/fp/resources/strategy/customized_script_header_template_file`

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: int, optional, default: 1
argument path: `init_bulk_mdata/fp/resources/para_deg`

Decide how many tasks will be run in parallel.

source_list:

type: `typing.List[str]`, optional, default: []
argument path: `init_bulk_mdata/fp/resources/source_list`

The env file to be sourced before the command execution.

```
module_purge:  
    type: bool, optional, default: False  
    argument path: init_bulk_mdata/fp/  
    resources/module_purge  
    Remove all modules on HPC system before  
    module load (module_list)  
  
module_unload_list:  
    type: typing.List[str], optional, default:  
    []  
    argument path: init_bulk_mdata/fp/  
    resources/module_unload_list  
    The modules to be unloaded on HPC system  
    before submitting jobs  
  
module_list:  
    type: typing.List[str], optional, default:  
    []  
    argument path: init_bulk_mdata/fp/  
    resources/module_list  
    The modules to be loaded on HPC system be-  
    fore submitting jobs  
  
envs:  
    type: dict, optional, default: {}  
    argument path:  
    init_bulk_mdata/fp/resources/envs  
    The environment variables to be exported on  
    before submitting jobs  
  
prepend_script:  
    type: typing.List[str], optional, default:  
    []  
    argument path: init_bulk_mdata/fp/  
    resources/prepend_script  
    Optional script run before jobs submitted.  
  
append_script:  
    type: typing.List[str], optional, default:  
    []  
    argument path: init_bulk_mdata/fp/  
    resources/append_script  
    Optional script run after jobs submitted.  
  
wait_time:  
    type: float | int, optional, default: 0
```

argument path: `init_bulk_mdata/fp/resources/wait_time`

The waitting time in second after a single *task* submitted

Depending on the value of `batch_type`, different sub args are accepted.

batch_type:

type: `str` (flag key)

argument path: `init_bulk_mdata/fp/resources/batch_type`

possible choices: `OpenAPI`,
`DistributedShell`, `Bohrium`, `Fugaku`,
`Slurm`, `SlurmJobArray`, `LSF`, `Shell`, `PBS`,
`SGE`, `Torque`

The batch job system type loaded from machine/`batch_type`.

When `batch_type` is set to `OpenAPI` (or its alias `openapi`):

kwargs:

type: `dict`, optional

argument path: `init_bulk_mdata/fp/resources[OpenAPI]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `DistributedShell` (or its alias `distributedshell`):

kwargs:

type: `dict`, optional

argument path: `init_bulk_mdata/fp/resources[DistributedShell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Bohrium` (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: `dict`, optional

argument path: `init_bulk_mdata/fp/resources[Bohrium]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Fugaku` (or its alias `fugaku`):

kwargs:

type: `dict`, optional

argument path: `init_bulk_mdata/fp/resources[Fugaku]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: `init_bulk_mdata/fp/resources[Slurm]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `init_bulk_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional
argument path: `init_bulk_mdata/fp/resources[SlurmJobArray]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `init_bulk_mdata/fp/resources[SlurmJobArray]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:

type: int, optional, default: 1
argument path: `init_bulk_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size`

Number of tasks in a Slurm job

When `batch_type` is set to `LSF` (or its alias `lsf`):

kwargs:

type: dict
argument path: `init_bulk_mdata/fp/resources[LSF]/kwargs`

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path: init_bulk_mdata/
fp/resources[LSF]/kwargs/
gpu_usage

Choosing if GPU is used in the calculation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path: init_bulk_mdata/
fp/resources[LSF]/kwargs/
gpu_new_syntax

For LFS >= 10.1.0.3, new option -gpu for #BSUB could be used. If False, and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path: init_bulk_mdata/
fp/resources[LSF]/kwargs/
gpu_exclusive

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: init_bulk_mdata/
fp/resources[LSF]/kwargs/
custom_gpu_line

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to `Shell` (or its alias `shell`):

kwargs:

type: dict, optional
argument path: init_bulk_mdata/fp/
resources[Shell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `PBS` (or its alias `pbs`):

kwargs:

type: dict, optional
argument path: init_bulk_mdata/fp/
resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to `SGE` (or its alias `sge`):

kwargs:

type: dict, optional
 argument path: init_bulk_mdata/fp/
 resources[SGE]/kwargs

This field is empty for this batch.

When batch_type is set to Torque (or its alias torque):

kwargs:

type: dict, optional
 argument path: init_bulk_mdata/fp/
 resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
 argument path:
 init_bulk_mdata/fp/user_forward_files

Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
 argument path:
 init_bulk_mdata/fp/user_backward_files

Files to be backwarded from the remote machine.

5.4 Init_surf

You may prepare initial data for surface systems with VASP by:

```
dpgen init_surf PARAM [MACHINE]
```

The MACHINE configure file is optional. If this parameter exists, then the optimization tasks or MD tasks will be submitted automatically according to MACHINE.json. That is to say, if one only wants to prepare surf-xxx/sys-xxx folders for the second stage but wants to skip relaxation, dpgen init_surf PARAM should be used (without MACHINE). “stages” and “skip_relax” in PARAM should be set as:

```
"stages": [1, 2],  

"skip_relax": true,
```

Basically init_surf can be divided into two parts , denoted as *stages* in PARAM:

1. Build specific surface in folder 00.place_ele
2. Pertub and scale in folder 01.scale_pert

All stages must be **in order**.

Generally, init_surf does not run AIMD but only generates a lot of configurations. Compared with init_bulk, which runs DFT calculations twice, init_surf does once. Usually, we do init_bulk, run many rounds of DP-GEN iterations, collect enough data for the bulk system, and do init_surf after that. At this point, the lattice constant

has been determined, and the lattice constant required for the initial configuration of `init_surf` can be used directly. These configurations made by `init_surf` are prepared for `01.model_devi`. Candidates will do DFT calculation in `02.fp`.

- Generate vacuum layers

According to the source code of `pert_scaled`, `init_surf` will generate a series of surface structures with specified separations between the sample layer and its periodic image. There are two ways to specify the interval in generating the vacuum layers: 1) to set the interval value and 2) to set the number of intervals.

You can use `layer_num` (the number of layers of the slab) or `z_min` (the total thickness) to specify the thickness of the atoms below. Then `vacuum_*` parameters specify the vacuum layers above. `dpgen init_surf` will make a series of structures with the thickness of vacuum layers from `vacuum_min` to `vacuum_max`. The number of vacuum layers is controlled by the parameter `vacuum_resol`.

The layers will be generated even when the size of `vacuum_resol` is 1. When the size of `vacuum_resol` is 2 or it is empty, the whole interval range is divided into the nearby region with denser intervals (head region) and the far-away region with sparser intervals (tail region), which are divided by `mid_point`.

When the size of `vacuum_resol` is 2, two elements respectively decide the number of intervals in head region and tail region.

When `vacuum_resol` is empty, the number of intervals in the head region = `vacuum_num * head_ratio`. `vacuum_num` and `head_ratio` are both keys in `param.json`.

- Attach files in the task path

One can use the machine parameter `forward_files` to upload other files besides POSCAR, INCAR, and POTCAR. For example, “vdw_kernal.bindat” for each task.

See the document of task parameters.

Following is an example for `PARAM`, which generates data from a typical structure fcc.

```
{
  "stages": [
    1,
    2
  ],
  "cell_type": "fcc",
  "latt": 4.034,
  "super_cell": [
    2,
    2,
    2
  ],
  "layer numb": 3,
  "vacuum_max": 9.0,
  "vacuum_resol": [
    0.5,
    1
  ],
  "mid_point": 4.0,
  "millers": [
    [
      1,
      0,
      0
    ]
  ]
}
```

(continues on next page)

(continued from previous page)

```

],
[
  1,
  1,
  0
],
[
  1,
  1,
  1
]
],
"elements": [
  "Al"
],
"potcars": [
  "...../POTCAR"
],
"relax_incar": "...../INCAR_metal_rlx_low",
"scale": [
  1.0
],
"skip_relax": true,
"pert_numb": 2,
"pert_box": 0.03,
"pert_atom": 0.01,
"_comment": "that's all"
}

```

Another example is `from_poscar` method. Here you need to specify the POSCAR file.

```
{
  "stages": [
    1,
    2
  ],
  "cell_type": "fcc",
  "from_poscar": true,
  "from_poscar_path": "POSCAR",
  "super_cell": [
    1,
    1,
    1
  ],
  "layer_numb": 3,
  "vacuum_max": 5.0,
  "vacuum_resol": [0.5, 2],
  "mid_point": 2.0,
  "millers": [
    [
      1,
      0,

```

(continues on next page)

(continued from previous page)

```
    ],
],
"elements": [
    "Al"
],
"potcars": [
    "./POTCAR"
],
"relax_incar" : "INCAR_metal_rlx_low",
"scale": [
    1.0
],
"skip_relax": true,
"pert_numb": 5,
"pert_box": 0.03,
"pert_atom": 0.01,
"coll_ndata": 5000,
"_comment": "that's all"
}
```

5.5 dpgen init_surf parameters

Note: One can load, modify, and export the input file by using our effective web-based tool [DP-GUI](#) online or hosted using the [command line interface](#) `dpgen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

```
init_surf_jdata:
    type: dict
    argument path: init_surf_jdata
    Generate initial data for surface systems.

    stages:
        type: list[int]
        argument path: init_surf_jdata/stages
        Stages for init_surf.

    elements:
        type: list[str]
        argument path: init_surf_jdata/elements
        Atom types.

    potcars:
        type: list[str], optional
        argument path: init_surf_jdata/potcars
        Path of POTCAR.
```

cell_type:
 type: str, optional
 argument path: init_surf_jdata/cell_type
 Specifying which typical structure to be generated. **Options** include fcc, hcp, bcc, sc, diamond.

super_cell:
 type: list[int]
 argument path: init_surf_jdata/super_cell
 Size of supercell.

from_poscar:
 type: bool, optional, default: False
 argument path: init_surf_jdata/from_poscar
 Deciding whether to use a given poscar as the beginning of relaxation. If it's true, keys (*cell_type*, *latt*) will be aborted. Otherwise, these two keys are **necessary**.

from_poscar_path:
 type: str, optional
 argument path: init_surf_jdata/from_poscar_path
 Path of POSCAR for VASP or STRU for ABACUS. **Necessary** if *from_poscar* is true.

latt:
 type: float
 argument path: init_surf_jdata/latt
 Lattice constant for single cell.

layer_numb:
 type: int, optional
 argument path: init_surf_jdata/layer_numb
 Number of atom layers constructing the slab.

z_min:
 type: int, optional
 argument path: init_surf_jdata/z_min
 Thickness of slab without vacuum (Angstrom). If *layer_numb* is set, *z_min* will be ignored.

vacuum_max:
 type: float
 argument path: init_surf_jdata/vacuum_max
 Maximal thickness of vacuum (Angstrom).

vacuum_min:
 type: float, optional
 argument path: init_surf_jdata/vacuum_min
 Minimal thickness of vacuum (Angstrom). Default value is 2 times atomic radius.

vacuum_resol:
type: list[float]
argument path: init_surf_jdata/vacuum_resol
Interval of thickness of vacuum. If size of *vacuum_resol* is 1, the interval is fixed to its value. If size of *vacuum_resol* is 2, the interval is *vacuum_resol[0]* before *mid_point*, otherwise *vacuum_resol[1]* after *mid_point*.

vacuum_numb:
type: int, optional
argument path: init_surf_jdata/vacuum_numb
The total number of vacuum layers **Necessary** if *vacuum_resol* is empty.

mid_point:
type: float, optional
argument path: init_surf_jdata/mid_point
The mid point separating head region and tail region. **Necessary** if the size of *vacuum_resol* is 2 or 0.

head_ratio:
type: float, optional
argument path: init_surf_jdata/head_ratio
Ratio of vacuum layers in the nearby region with denser intervals(head region). **Necessary** if *vacuum_resol* is empty.

millers:
type: list[list[int]]
argument path: init_surf_jdata/millers
Miller indices.

relax_incar:
type: str, optional
argument path: init_surf_jdata/relax_incar
Path of INCAR for relaxation in VASP. **Necessary** if *stages* include 1.

scale:
type: list[float]
argument path: init_surf_jdata/scale
Scales for isotropic transforming cells.

skip_relax:
type: bool
argument path: init_surf_jdata/skip_relax
If it's true, you may directly run stage 2 (perturb and scale) using an unrelaxed POSCAR.

pert_numb:
type: int
argument path: init_surf_jdata/pert_numb
Number of perturbations for each scaled (key *scale*) POSCAR.

```
pert_box:
    type: float
    argument path: init_surf_jdata/pert_box

    Anisotropic Perturbation for cells (independent changes of lengths of three box
    vectors as well as angel among) in decimal formats. 9 elements of the 3x3 per-
    turbation matrix will be randomly sampled from a uniform distribution (default)
    in the range [-pert_box, pert_box]. Such a perturbation matrix adds the identity
    matrix gives the actual transformation matrix for this perturbation operation.

pert_atom:
    type: float
    argument path: init_surf_jdata/pert_atom

    Perturbation of atom coordinates (Angstrom). Random perturbations are per-
    formed on three coordinates of each atom by adding values randomly sampled
    from a uniform distribution in the range [-pert_atom, pert_atom].

coll_ntdata:
    type: int
    argument path: init_surf_jdata/coll_ntdata

    Maximal number of collected data.
```

5.6 dpgen init_surf machine parameters

Note: One can load, modify, and export the input file by using our effective web-based tool [DP-GUI](#) online or hosted using the [command line interface](#) `dpgen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

```
init_surf_mdata:
    type: dict
    argument path: init_surf_mdata

    machine.json file

api_version:
    type: str, optional, default: 1.0
    argument path: init_surf_mdata/api_version

    Please set to 1.0

deepmd_version:
    type: str, optional, default: 2
    argument path: init_surf_mdata/deepmd_version

    DeePMD-kit version, e.g. 2.1.3

fp:
    type: dict
    argument path: init_surf_mdata/fp

    Parameters of command, machine, and resources for fp
```

command:

type: str
argument path: init_surf_mdata/fp/command
Command of a program.

machine:

type: dict
argument path: init_surf_mdata/fp/machine

batch_type:

type: str
argument path: init_surf_mdata/fp/
machine/batch_type

The batch job system type. Option: SGE,
Slurm, Shell, Torque, PBS, Bohrium, OpenAPI,
Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path: init_surf_mdata/fp/
machine/local_root

The dir where the tasks and relating files locate.
Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path: init_surf_mdata/fp/
machine/remote_root

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: init_surf_mdata/fp/
machine/clean_asynchronously

Clean the remote directory asynchronously after the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)
argument path: init_surf_mdata/fp/
machine/context_type

possible choices: `LocalContext`,
`LazyLocalContext`, `BohriumContext`,
`HDFSContext`, `SSHContext`,
`OpenAPIContext`

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFS-Context, LazyLocalContext, BohriumContext, LocalContext

When `context_type` is set to `LocalContext` (or its aliases `localcontext`, `Local`, `local`):

remote_profile:

type: dict, optional
argument path: `init_surf_mdata/fp/`
`machine[LocalContext]/`
`remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `LazyLocalContext` (or its aliases `lazylocalcontext`, `LazyLocal`, `lazylocal`):

remote_profile:

type: dict, optional
argument path: `init_surf_mdata/fp/`
`machine[LazyLocalContext]/`
`remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict
argument path: `init_surf_mdata/fp/`
`machine[BohriumContext]/`
`remote_profile`

The information used to maintain the connection with remote machine.

email:

type: str, optional
argument path: `init_surf_mdata/`
`fp/machine[BohriumContext]/`
`remote_profile/email`

Email

password:

type: str, optional
argument path: init_surf_mdata/
fp/machine[BohriumContext]/
remote_profile/password

Password

program_id:

type: int, alias: *project_id*
argument path: init_surf_mdata/
fp/machine[BohriumContext]/
remote_profile/program_id

Program ID

retry_count:

type: NoneType | int, optional,
default: 2
argument path: init_surf_mdata/
fp/machine[BohriumContext]/
remote_profile/retry_count

The retry count when a job is terminated

ignore_exit_code:

type: bool, optional, default: True
argument path: init_surf_mdata/
fp/machine[BohriumContext]/
remote_profile/
ignore_exit_code

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:

type: bool, optional
argument path: init_surf_mdata/
fp/machine[BohriumContext]/
remote_profile/keep_backup

keep download and upload zip

input_data:

type: dict
argument path: init_surf_mdata/
fp/machine[BohriumContext]/
remote_profile/input_data

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional
argument path: init_surf_mdata/fp/
machine[HDFSContext]/remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
argument path: init_surf_mdata/fp/
machine[SSHContext]/remote_profile

The information used to maintain the connection with remote machine.

hostname:

type: str
argument path: init_surf_mdata/
fp/machine[SSHContext]/
remote_profile/hostname

hostname or ip of ssh connection.

username:

type: str
argument path: init_surf_mdata/
fp/machine[SSHContext]/
remote_profile/username

username of target linux system

password:

type: str, optional
argument path: init_surf_mdata/
fp/machine[SSHContext]/
remote_profile/password

(deprecated) password of linux system. Please use `SSH keys` instead to improve security.

port:

type: int, optional, default: 22
argument path: init_surf_mdata/
fp/machine[SSHContext]/
remote_profile/port

ssh connection port.

key_filename:

type: str | NoneType, optional,
default: None

argument path: `init_surf_mdata/fp/machine[SSHContext]/remote_profile/key_filename`

key filename used by ssh connection.
If left None, find key in `~/.ssh` or use
password for login

passphrase:

type: `str | NoneType`, optional,
default: `None`

argument path: `init_surf_mdata/fp/machine[SSHContext]/remote_profile/passphrase`

passphrase of key used by ssh connec-
tion

timeout:

type: `int`, optional, default: `10`
argument path: `init_surf_mdata/fp/machine[SSHContext]/remote_profile/timeout`

timeout of ssh connection

totp_secret:

type: `str | NoneType`, optional,
default: `None`

argument path: `init_surf_mdata/fp/machine[SSHContext]/remote_profile/totp_secret`

Time-based one time password se-
cret. It should be a base32-encoded
string extracted from the 2D code.

tar_compress:

type: `bool`, optional, default: `True`
argument path: `init_surf_mdata/fp/machine[SSHContext]/remote_profile/tar_compress`

The archive will be compressed in up-
load and download if it is `True`. If not,
compression will be skipped.

look_for_keys:

type: `bool`, optional, default: `True`
argument path: `init_surf_mdata/fp/machine[SSHContext]/remote_profile/look_for_keys`

enable searching for discoverable pri-
vate key files in `~/.ssh/`

When `context_type` is set to `OpenAPIContext` (or its aliases
`openapicontext`, `OpenAPI`, `openapi`):

remote_profile:

type: dict, optional
argument path: init_surf_mdata/fp/
machine[OpenAPIContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

resources:

type: dict
argument path: init_surf_mdata/fp/resources

number_node:

type: int, optional, default: 1
argument path: init_surf_mdata/fp/
resources/number_node

The number of node need for each *job*

cpu_per_node:

type: int, optional, default: 1
argument path: init_surf_mdata/fp/
resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: init_surf_mdata/fp/
resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)
argument path: init_surf_mdata/fp/
resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int
argument path: init_surf_mdata/fp/
resources/group_size

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: typing.List[str], optional

argument path: `init_surf_mdata/fp/resources/custom_flags`

The extra lines pass to job submitting script header

strategy:

type: `dict`, optional

argument path: `init_surf_mdata/fp/resources/strategy`

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: `bool`, optional, default: `False`

argument path: `init_surf_mdata/fp/resources/strategy/if_cuda_multi_devices`

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, `dpp dispatcher` will manually export environment variable `CUDA_VISIBLE_DEVICES` to different task.Usually, this option will be used with `Task.task_need_resources` variable simultaneously.

ratio_unfinished:

type: `float`, optional, default: `0.0`

argument path: `init_surf_mdata/fp/resources/strategy/ratio_unfinished`

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: `str`, optional

argument path: `init_surf_mdata/fp/resources/strategy/customized_script_header_template_file`

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: `int`, optional, default: `1`

argument path: `init_surf_mdata/fp/resources/para_deg`

Decide how many tasks will be run in parallel.

source_list:

type: typing.List[str], optional, default:
[]
argument path: init_surf_mdata/fp/
resources/source_list

The env file to be sourced before the command
execution.

module_purge:

type: bool, optional, default: False
argument path: init_surf_mdata/fp/
resources/module_purge

Remove all modules on HPC system before
module load (module_list)

module_unload_list:

type: typing.List[str], optional, default:
[]
argument path: init_surf_mdata/fp/
resources/module_unload_list

The modules to be unloaded on HPC system
before submitting jobs

module_list:

type: typing.List[str], optional, default:
[]
argument path: init_surf_mdata/fp/
resources/module_list

The modules to be loaded on HPC system be-
fore submitting jobs

envs:

type: dict, optional, default: {}
argument path:
init_surf_mdata/fp/resources/envs

The environment variables to be exported on
before submitting jobs

prepend_script:

type: typing.List[str], optional, default:
[]
argument path: init_surf_mdata/fp/
resources/prepend_script

Optional script run before jobs submitted.

append_script:

type: typing.List[str], optional, default:
[]

argument path: `init_surf_mdata/fp/resources/append_script`

Optional script run after jobs submitted.

wait_time:

type: `float | int`, optional, default: `0`

argument path: `init_surf_mdata/fp/resources/wait_time`

The waiting time in second after a single *task* submitted

Depending on the value of `batch_type`, different sub args are accepted.

batch_type:

type: `str` (flag key)

argument path: `init_surf_mdata/fp/resources/batch_type`

possible choices: `OpenAPI`,
`DistributedShell`, `Bohrium`, `Fugaku`,
`Slurm`, `SlurmJobArray`, `LSF`, `Shell`, `PBS`,
`SGE`, `Torque`

The batch job system type loaded from machine/`batch_type`.

When `batch_type` is set to `OpenAPI` (or its alias `openapi`):

kwargs:

type: `dict`, optional

argument path: `init_surf_mdata/fp/resources[OpenAPI]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `DistributedShell` (or its alias `distributedshell`):

kwargs:

type: `dict`, optional

argument path: `init_surf_mdata/fp/resources[DistributedShell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Bohrium` (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: `dict`, optional

argument path: `init_surf_mdata/fp/resources[Bohrium]/kwargs`

This field is empty for this batch.

When `batch_type` is set to Fugaku (or its alias `fugaku`):

kwargs:

type: dict, optional
argument path: `init_surf_mdata/fp/resources[Fugaku]/kwargs`

This field is empty for this batch.

When `batch_type` is set to Slurm (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: `init_surf_mdata/fp/resources[Slurm]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `init_surf_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to SlurmJobArray (or its alias `slurmjobarray`):

kwargs:

type: dict, optional
argument path: `init_surf_mdata/fp/resources[SlurmJobArray]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `init_surf_mdata/fp/resources[SlurmJobArray]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:

type: int, optional, default: 1
argument path: `init_surf_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size`

Number of tasks in a Slurm job

When `batch_type` is set to LSF (or its alias `lsf`):

kwargs:

type: dict
argument path: `init_surf_mdata/fp/resources[LSF]/kwargs`

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path: `init_surf_mdata/fp/resources[LSF]/kwargs/gpu_usage`

Choosing if GPU is used in the calculation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path: `init_surf_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax`

For LFS >= 10.1.0.3, new option -gpu for #BSUB could be used. If False, and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path: `init_surf_mdata/fp/resources[LSF]/kwargs/gpu_exclusive`

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `init_surf_mdata/fp/resources[LSF]/kwargs/custom_gpu_line`

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to Shell (or its alias shell):

kwargs:

type: dict, optional
argument path: `init_surf_mdata/fp/resources[Shell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to PBS (or its alias pbs):

kwargs:

type: dict, optional
argument path: init_surf_mdata/fp/
resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to SGE (or its alias `sge`):

kwargs:

type: dict, optional
argument path: init_surf_mdata/fp/
resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to Torque (or its alias `torque`):

kwargs:

type: dict, optional
argument path: init_surf_mdata/fp/
resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path:
init_surf_mdata/fp/user_forward_files

Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
argument path:
init_surf_mdata/fp/user_backward_files

Files to be backwarded from the remote machine.

5.7 init_reaction

`dpgen init_reaction` is a workflow to initialize data for reactive systems of small gas-phase molecules. The workflow was introduced in the “Initialization” section of [Energy & Fuels, 2021, 35 \(1\), 762–769](#).

To start the workflow, one needs a box containing reactive systems. The following packages are required for each of the step:

- Exploring: [LAMMPS](#)
- Sampling: [MDDatasetBuilder](#)
- Labeling: [Gaussian](#)

The Exploring step uses LAMMPS `pair_style reaxff` to run a short ReaxMD NVT MD simulation. In the Sampling step, molecular clusters are taken and k-means clustering algorithm is applied to remove the redundancy, which is described

in Nature Communications, 11, 5713 (2020). The Labeling step calculates energies and forces using the Gaussian package.

An example of `reaction.json` is given below:

```
1  {
2      "type_map": [
3          "H",
4          "O"
5      ],
6      "reaxff": {
7          "data": "data.hydrogen",
8          "ff": "ffield.reax.cho",
9          "control": "lmp_control",
10         "temp": 3000,
11         "tau_t": 100,
12         "dt": 0.1,
13         "nstep": 10000,
14         "dump_freq": 100
15     },
16     "cutoff": 3.5,
17     "dataset_size": 100,
18     "qmkeywords": "b3lyp/6-31g** force Geom=PrintInput0rient"
19 }
```

For detailed parameters, see [parameters](#) and [machine parameters](#).

The generated data can be used to continue DP-GEN concurrent learning workflow. Read [Energy & Fuels](#), 2021, 35 (1), 762–769 for details.

5.8 dpigen init_reaction parameters

Note: One can load, modify, and export the input file by using our effective web-based tool [DP-GUI](#) online or hosted using the [command line interface](#) `dpigen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

```
init_reaction_jdata:
    type: dict
    argument path: init_reaction_jdata

    Generate initial data for reactive systems for small gas-phase molecules, from a ReaxFF NVT MD
    trajectory.

    type_map:
        type: list[str]
        argument path: init_reaction_jdata/type_map

        Type map, which should match types in the initial data. e.g. ["C", "H", "O"]

    reaxff:
        type: dict
        argument path: init_reaction_jdata/reaxff

        Parameters for ReaxFF NVT MD.
```

data:

type: str
argument path: init_reaction_jdata/reaxff/data
Path to initial LAMMPS data file. The atom_style should be charge.

ff:

type: str
argument path: init_reaction_jdata/reaxff/ff
Path to ReaxFF force field file. Available in the lammps/potentials directory.

control:

type: str
argument path: init_reaction_jdata/reaxff/control
Path to ReaxFF control file.

temp:

type: int | float
argument path: init_reaction_jdata/reaxff/temp
Target Temperature for the NVT MD simulation. Unit: K.

dt:

type: int | float
argument path: init_reaction_jdata/reaxff/dt
Real time for every time step. Unit: fs.

tau_t:

type: int | float
argument path: init_reaction_jdata/reaxff/tau_t
Time to determine how rapidly the temperature. Unit: fs.

dump_freq:

type: int
argument path: init_reaction_jdata/reaxff/dump_freq
Frequency of time steps to collect trajectory.

nstep:

type: int
argument path: init_reaction_jdata/reaxff/nstep
Total steps to run the ReaxFF MD simulation.

cutoff:

type: float

argument path: `init_reaction_jdata/cutoff`

Cutoff radius to take clusters from the trajectory. Note that only a complete molecule or free radical will be taken.

dataset_size:

type: `int`

argument path: `init_reaction_jdata/dataset_size`

Collected dataset size for each bond type.

qmkeywords:

type: `str`

argument path: `init_reaction_jdata/qmkeywords`

Gaussian keywords for first-principle calculations. e.g. force mn15/6-31g** Geom=PrintInputOrient. Note that “force” job is necessary to collect data. Geom=PrintInputOrient should be used when there are more than 50 atoms in a cluster.

5.9 dpgen init_reaction machine parameters

Note: One can load, modify, and export the input file by using our effective web-based tool [DP-GUI](#) online or hosted using the [command line interface](#) `dpgen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

init_reaction_mdata:

type: `dict`

argument path: `init_reaction_mdata`

machine.json file

api_version:

type: `str`, optional, default: `1.0`

argument path: `init_reaction_mdata/api_version`

Please set to 1.0

deepmd_version:

type: `str`, optional, default: `2`

argument path: `init_reaction_mdata/deepmd_version`

DeePMD-kit version, e.g. 2.1.3

reaxff:

type: `dict`

argument path: `init_reaction_mdata/reaxff`

Parameters of command, machine, and resources for reaxff

command:

type: `str`

argument path: `init_reaction_mdata/reaxff/command`

Command of a program.

machine:

type: dict
argument path: init_reaction_mdata/reaxff/machine

batch_type:

type: str
argument path: init_reaction_mdata/
reaxff/machine/batch_type

The batch job system type. Option: SGE,
Slurm, Shell, Torque, PBS, Bohrium, OpenAPI,
Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path: init_reaction_mdata/
reaxff/machine/local_root

The dir where the tasks and relating files locate.
Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path: init_reaction_mdata/
reaxff/machine/remote_root

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: init_reaction_mdata/
reaxff/machine/clean_asynchronously

Clean the remote directory asynchronously after the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)
argument path: init_reaction_mdata/
reaxff/machine/context_type
possible choices: *LocalContext*,
LazyLocalContext, *BohriumContext*,
HDFSContext, *SSHContext*,
OpenAPIContext

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFS-

Context, LazyLocalContext, BohriumContext,
LocalContext

When `context_type` is set to `LocalContext` (or its aliases `localcontext`, `Local`, `local`):

remote_profile:

type: dict, optional
argument path: `init_reaction_mdata/reaxff/machine[LocalContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `LazyLocalContext` (or its aliases `lazylocalcontext`, `LazyLocal`, `lazylocal`):

remote_profile:

type: dict, optional
argument path: `init_reaction_mdata/reaxff/machine[LazyLocalContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict
argument path: `init_reaction_mdata/reaxff/machine[BohriumContext]/remote_profile`

The information used to maintain the connection with remote machine.

email:

type: str, optional
argument path:
`init_reaction_mdata/reaxff/machine[BohriumContext]/remote_profile/email`

Email

password:

type: str, optional

```
argument path:  
init_reaction_mdata/reaxff/  
machine[BohriumContext]/  
remote_profile/password  
Password  
program_id:  
type: int, alias: project_id  
argument path:  
init_reaction_mdata/reaxff/  
machine[BohriumContext]/  
remote_profile/program_id  
Program ID  
retry_count:  
type: NoneType | int, optional,  
default: 2  
argument path:  
init_reaction_mdata/reaxff/  
machine[BohriumContext]/  
remote_profile/retry_count  
The retry count when a job is termi-  
nated  
ignore_exit_code:  
type: bool, optional, default: True  
argument path:  
init_reaction_mdata/reaxff/  
machine[BohriumContext]/  
remote_profile/  
ignore_exit_code  
The job state will be marked as  
finished if the exit code is non-zero  
when set to True. Otherwise,  
the job state will be designated as  
terminated.  
keep_backup:  
type: bool, optional  
argument path:  
init_reaction_mdata/reaxff/  
machine[BohriumContext]/  
remote_profile/keep_backup  
keep download and upload zip  
input_data:  
type: dict  
argument path:  
init_reaction_mdata/reaxff/  
machine[BohriumContext]/  
remote_profile/input_data  
Configuration of job
```

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional
argument path:
`init_reaction_mdata/reaxff/`
`machine[HDFSContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
argument path:
`init_reaction_mdata/reaxff/`
`machine[SSHContext]/remote_profile`

The information used to maintain the connection with remote machine.

hostname:

type: str
argument path:
`init_reaction_mdata/reaxff/`
`machine[SSHContext]/`
`remote_profile/hostname`

hostname or ip of ssh connection.

username:

type: str
argument path:
`init_reaction_mdata/reaxff/`
`machine[SSHContext]/`
`remote_profile/username`

username of target linux system

password:

type: str, optional
argument path:
`init_reaction_mdata/reaxff/`
`machine[SSHContext]/`
`remote_profile/password`

(deprecated) password of linux system. Please use `SSH keys` instead to improve security.

port:

type: int, optional, default: 22

argument path:
init_reaction_mdata/reaxff/
machine[SSHContext]/
remote_profile/port
ssh connection port.

key_filename:

type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/reaxff/
machine[SSHContext]/
remote_profile/key_filename
key filename used by ssh connection.
If left None, find key in ~/.ssh or use
password for login

passphrase:

type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/reaxff/
machine[SSHContext]/
remote_profile/passphrase
passphrase of key used by ssh connec-
tion

timeout:

type: int, optional, default: 10
argument path:
init_reaction_mdata/reaxff/
machine[SSHContext]/
remote_profile/timeout
timeout of ssh connection

totp_secret:

type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/reaxff/
machine[SSHContext]/
remote_profile/totp_secret
Time-based one time password se-
cret. It should be a base32-encoded
string extracted from the 2D code.

tar_compress:

type: bool, optional, default: True
argument path:
init_reaction_mdata/reaxff/
machine[SSHContext]/
remote_profile/tar_compress

The archive will be compressed in upload and download if it is True. If not, compression will be skipped.

look_for_keys:

type: bool, optional, default: True
argument path:
init_reaction_mdata/reaxff/
machine[SSHContext]/
remote_profile/look_for_keys
enable searching for discoverable private key files in ~/.ssh/

When `context_type` is set to `OpenAPIContext` (or its aliases `openapicontext`, `OpenAPI`, `openapi`):

remote_profile:

type: dict, optional
argument path: init_reaction_mdata/
reaxff/machine[OpenAPIContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

resources:

type: dict
argument path:
init_reaction_mdata/reaxff/resources

number_node:

type: int, optional, default: 1
argument path: init_reaction_mdata/
reaxff/resources/number_node

The number of node need for each *job*

cpu_per_node:

type: int, optional, default: 1
argument path: init_reaction_mdata/
reaxff/resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: init_reaction_mdata/
reaxff/resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)

argument path: `init_reaction_mdata/reaxff/resources/queue_name`

The queue name of batch job scheduler system.

group_size:

type: `int`

argument path: `init_reaction_mdata/reaxff/resources/group_size`

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: `typing.List[str]`, optional

argument path: `init_reaction_mdata/reaxff/resources/custom_flags`

The extra lines pass to job submitting script header

strategy:

type: `dict`, optional

argument path: `init_reaction_mdata/reaxff/resources/strategy`

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: `bool`, optional, default: `False`

argument path:

`init_reaction_mdata/reaxff/resources/strategy/if_cuda_multi_devices`

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, dpdispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task.Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:

type: `float`, optional, default: `0.0`

argument path:

`init_reaction_mdata/reaxff/resources/strategy/ratio_unfinished`

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: str, optional

argument path:

init_reaction_mdata/reaxff/

resources/strategy/

customized_script_header_template_file

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: int, optional, default: 1

argument path: init_reaction_mdata/
reaxff/resources/para_deg

Decide how many tasks will be run in parallel.

source_list:

type: typing.List[str], optional, default:

[]

argument path: init_reaction_mdata/
reaxff/resources/source_list

The env file to be sourced before the command execution.

module_purge:

type: bool, optional, default: False

argument path: init_reaction_mdata/
reaxff/resources/module_purge

Remove all modules on HPC system before module load (module_list)

module_unload_list:

type: typing.List[str], optional, default:

[]

argument path: init_reaction_mdata/
reaxff/resources/module_unload_list

The modules to be unloaded on HPC system before submitting jobs

module_list:

type: typing.List[str], optional, default:

[]

argument path: init_reaction_mdata/
reaxff/resources/module_list

The modules to be loaded on HPC system before submitting jobs

envs:

type: dict, optional, default: {}
argument path: init_reaction_mdata/
reaxff/resources/envs

The environment variables to be exported on
before submitting jobs

prepend_script:

type: typing.List[str], optional, default:
[]
argument path: init_reaction_mdata/
reaxff/resources/prepend_script

Optional script run before jobs submitted.

append_script:

type: typing.List[str], optional, default:
[]
argument path: init_reaction_mdata/
reaxff/resources/append_script

Optional script run after jobs submitted.

wait_time:

type: float | int, optional, default: 0
argument path: init_reaction_mdata/
reaxff/resources/wait_time

The waiting time in second after a single *task*
submitted

Depending on the value of *batch_type*, different sub args are
accepted.

batch_type:

type: str (flag key)
argument path: init_reaction_mdata/
reaxff/resources/batch_type
possible choices: *OpenAPI*,
DistributedShell, *Bohrium*, *Fugaku*,
Slurm, *SlurmJobArray*, *LSF*, *Shell*, *PBS*,
SGE, *Torque*

The batch job system type loaded from
machine/batch_type.

When `batch_type` is set to *OpenAPI* (or its alias `openapi`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
reaxff/resources[*OpenAPI*]/kwargs

This field is empty for this batch.

When `batch_type` is set to `DistributedShell` (or its alias `distributedshell`):

kwargs:

type: dict, optional
argument path:
`init_reaction_mdata/reaxff/`
`resources[DistributedShell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Bohrium` (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: dict, optional
argument path: `init_reaction_mdata/`
`reaxff/resources[Bohrium]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Fugaku` (or its alias `fugaku`):

kwargs:

type: dict, optional
argument path: `init_reaction_mdata/`
`reaxff/resources[Fugaku]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: `init_reaction_mdata/`
`reaxff/resources[Slurm]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
`init_reaction_mdata/reaxff/`
`resources[Slurm]/kwargs/`
`custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional

argument path:
`init_reaction_mdata/reaxff/`
`resources[SlurmJobArray]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
`init_reaction_mdata/reaxff/`
`resources[SlurmJobArray]/`
`kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:

type: int, optional, default: 1
argument path:
`init_reaction_mdata/reaxff/`
`resources[SlurmJobArray]/`
`kwargs/slurm_job_size`

Number of tasks in a Slurm job

When `batch_type` is set to LSF (or its alias `lsf`):

kwargs:

type: dict
argument path: `init_reaction_mdata/`
`reaxff/resources[LSF]/kwargs`

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path:
`init_reaction_mdata/reaxff/`
`resources[LSF]/kwargs/`
`gpu_usage`

Choosing if GPU is used in the calcu-
lation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path:
`init_reaction_mdata/reaxff/`
`resources[LSF]/kwargs/`
`gpu_new_syntax`

For LFS >= 10.1.0.3, new option -gpu
for #BSUB could be used. If False,
and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True

argument path:
init_reaction_mdata/reaxff/
resources[LSF]/kwargs/
gpu_exclusive

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None

argument path:
init_reaction_mdata/reaxff/
resources[LSF]/kwargs/
custom_gpu_line

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to `Shell` (or its alias `shell`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
reaxff/resources[Shell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `PBS` (or its alias `pbs`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
reaxff/resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to `SGE` (or its alias `sge`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
reaxff/resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Torque` (or its alias `torque`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
reaxff/resources[Torque]/kwargs

This field is empty for this batch.

```
user_forward_files:  
    type: list, optional  
    argument path:  
        init_reaction_mdata/reaxff/user_forward_files  
    Files to be forwarded to the remote machine.  
  
user_backward_files:  
    type: list, optional  
    argument path:  
        init_reaction_mdata/reaxff/user_backward_files  
    Files to be backwarded from the remote machine.  
  
build:  
    type: dict  
    argument path: init_reaction_mdata/build  
    Parameters of command, machine, and resources for build  
  
command:  
    type: str  
    argument path: init_reaction_mdata/build/command  
    Command of a program.  
  
machine:  
    type: dict  
    argument path: init_reaction_mdata/build/machine  
  
batch_type:  
    type: str  
    argument path: init_reaction_mdata/  
        build/machine/batch_type  
    The batch job system type. Option: SGE,  
    Slurm, Shell, Torque, PBS, Bohrium, OpenAPI,  
    Fugaku, SlurmJobArray, LSF, DistributedShell  
  
local_root:  
    type: str | NoneType  
    argument path: init_reaction_mdata/  
        build/machine/local_root  
    The dir where the tasks and relating files locate.  
    Typically the project dir.  
  
remote_root:  
    type: str | NoneType, optional  
    argument path: init_reaction_mdata/  
        build/machine/remote_root
```

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: init_reaction_mdata/
build/machine/clean_asynchronously

Clean the remote directory asynchronously after the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)
argument path: init_reaction_mdata/
build/machine/context_type
possible choices: *LocalContext*,
LazyLocalContext, *BohriumContext*,
HDFSContext, *SSHContext*,
OpenAPIContext

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFSContext, LazyLocalContext, BohriumContext, LocalContext

When *context_type* is set to *LocalContext* (or its aliases localcontext, Local, local):

remote_profile:

type: dict, optional
argument path: init_reaction_mdata/
build/machine[LocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When *context_type* is set to *LazyLocalContext* (or its aliases lazylocalcontext, LazyLocal, lazylocal):

remote_profile:

type: dict, optional
argument path: init_reaction_mdata/
build/machine[LazyLocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict
argument path: `init_reaction_mdata/build/machine[BohriumContext]/remote_profile`

The information used to maintain the connection with remote machine.

email:

type: str, optional
argument path:
`init_reaction_mdata/build/machine[BohriumContext]/remote_profile/email`

Email

password:

type: str, optional
argument path:
`init_reaction_mdata/build/machine[BohriumContext]/remote_profile/password`

Password

program_id:

type: int, alias: `project_id`
argument path:
`init_reaction_mdata/build/machine[BohriumContext]/remote_profile/program_id`

Program ID

retry_count:

type: NoneType | int, optional,
default: 2
argument path:
`init_reaction_mdata/build/machine[BohriumContext]/remote_profile/retry_count`

The retry count when a job is terminated

ignore_exit_code:

type: bool, optional, default: True

argument path:
init_reaction_mdata/build/
machine[BohriumContext]/
remote_profile/
ignore_exit_code

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:

type: bool, optional
argument path:
init_reaction_mdata/build/
machine[BohriumContext]/
remote_profile/keep_backup

keep download and upload zip

input_data:

type: dict
argument path:
init_reaction_mdata/build/
machine[BohriumContext]/
remote_profile/input_data

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional
argument path:
init_reaction_mdata/build/
machine[HDFSContext]/remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
argument path:
init_reaction_mdata/build/
machine[SSHContext]/remote_profile

The information used to maintain the connection with remote machine.

hostname:

type: str

argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/hostname
hostname or ip of ssh connection.

username:

type: str
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/username
username of target linux system

password:

type: str, optional
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/password
(deprecated) password of linux system. Please use [SSH keys](#) instead to improve security.

port:

type: int, optional, default: 22
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/port
ssh connection port.

key_filename:

type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/key_filename
key filename used by ssh connection.
If left None, find key in ~/.ssh or use password for login

passphrase:

type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/passphrase
passphrase of key used by ssh connection

timeout:
type: int, optional, default: 10
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/timeout

timeout of ssh connection

totp_secret:
type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/totp_secret

Time-based one time password secret. It should be a base32-encoded string extracted from the 2D code.

tar_compress:
type: bool, optional, default: True
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/tar_compress

The archive will be compressed in upload and download if it is True. If not, compression will be skipped.

look_for_keys:
type: bool, optional, default: True
argument path:
init_reaction_mdata/build/
machine[SSHContext]/
remote_profile/look_for_keys
enable searching for discoverable private key files in ~/.ssh/

When `context_type` is set to `OpenAPIContext` (or its aliases `openapicontext`, `OpenAPI`, `openapi`):

remote_profile:

type: dict, optional
argument path: init_reaction_mdata/
build/machine[OpenAPIContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

resources:

```
type: dict
argument path:
init_reaction_mdata/build/resources

number_node:

type: int, optional, default: 1
argument path: init_reaction_mdata/
build/resources/number_node

The number of node need for each job

cpu_per_node:

type: int, optional, default: 1
argument path: init_reaction_mdata/
build/resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: init_reaction_mdata/
build/resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)
argument path: init_reaction_mdata/
build/resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int
argument path: init_reaction_mdata/
build/resources/group_size

The number of tasks in a job. 0 means infinity.

custom_flags:

type: typing.List[str], optional
argument path: init_reaction_mdata/
build/resources/custom_flags

The extra lines pass to job submitting script
header

strategy:

type: dict, optional
argument path: init_reaction_mdata/
build/resources/strategy

strategies we use to generation job submitting
scripts.
```

```
if_cuda_multi_devices:
    type: bool, optional, default: False
    argument path:
        init_reaction_mdata/build/
        resources/strategy/
        if_cuda_multi_devices

    If there are multiple nvidia GPUS
    on the node, and we want to as-
    sign the tasks to different GPUS.If
    true, dDispatcher will manu-
    ally export environment variable
    CUDA_VISIBLE_DEVICES to dif-
    ferent task.Usually, this option will be
    used with Task.task_need_resources
    variable simultaneously.

ratio_unfinished:
    type: float, optional, default: 0.0
    argument path:
        init_reaction_mdata/build/
        resources/strategy/
        ratio_unfinished

    The ratio of tasks that can be unfin-
    ished.

customized_script_header_template_file:
    type: str, optional
    argument path:
        init_reaction_mdata/build/
        resources/strategy/
        customized_script_header_template_file

    The customized template file to gen-
    erate job submitting script header,
    which overrides the default file.

para_deg:
    type: int, optional, default: 1
    argument path: init_reaction_mdata/
    build/resources/para_deg

    Decide how many tasks will be run in parallel.

source_list:
    type: typing.List[str], optional, default:
        []
    argument path: init_reaction_mdata/
    build/resources/source_list

    The env file to be sourced before the command
    execution.

module_purge:
```

type: bool, optional, default: False
argument path: init_reaction_mdata/
build/resources/module_purge
Remove all modules on HPC system before
module load (module_list)

module_unload_list:

type: typing.List[str], optional, default:
[]
argument path: init_reaction_mdata/
build/resources/module_unload_list
The modules to be unloaded on HPC system
before submitting jobs

module_list:

type: typing.List[str], optional, default:
[]
argument path: init_reaction_mdata/
build/resources/module_list
The modules to be loaded on HPC system be-
fore submitting jobs

envs:

type: dict, optional, default: {}
argument path: init_reaction_mdata/
build/resources/envs
The environment variables to be exported on
before submitting jobs

prepend_script:

type: typing.List[str], optional, default:
[]
argument path: init_reaction_mdata/
build/resources/prepend_script
Optional script run before jobs submitted.

append_script:

type: typing.List[str], optional, default:
[]
argument path: init_reaction_mdata/
build/resources/append_script
Optional script run after jobs submitted.

wait_time:

type: float | int, optional, default: 0
argument path: init_reaction_mdata/
build/resources/wait_time

The waiting time in second after a single *task* submitted

Depending on the value of *batch_type*, different sub args are accepted.

batch_type:

type: str (flag key)
argument path: init_reaction_mdata/
build/resources/batch_type
possible choices: *OpenAPI*,
DistributedShell, *Bohrium*, *Fugaku*,
Slurm, *SlurmJobArray*, *LSF*, *Shell*, *PBS*,
SGE, *Torque*

The batch job system type loaded from machine/batch_type.

When *batch_type* is set to *OpenAPI* (or its alias *openapi*):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
build/resources[*OpenAPI*]/kwargs

This field is empty for this batch.

When *batch_type* is set to *DistributedShell* (or its alias *distributedshell*):

kwargs:

type: dict, optional
argument path:
init_reaction_mdata/build/
resources[*DistributedShell*]/kwargs

This field is empty for this batch.

When *batch_type* is set to *Bohrium* (or its aliases *bohrium*, *Lebesgue*, *lebesgue*, *DpCloudServer*, *dpcloudserver*):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
build/resources[*Bohrium*]/kwargs

This field is empty for this batch.

When *batch_type* is set to *Fugaku* (or its alias *fugaku*):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
build/resources[*Fugaku*]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: `init_reaction_mdata/build/resources[Slurm]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
`init_reaction_mdata/build/resources[Slurm]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional
argument path:
`init_reaction_mdata/build/resources[SlurmJobArray]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
`init_reaction_mdata/build/resources[SlurmJobArray]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:

type: int, optional, default: 1
argument path:
`init_reaction_mdata/build/resources[SlurmJobArray]/kwargs/slurm_job_size`

Number of tasks in a Slurm job

When `batch_type` is set to `LSF` (or its alias `lsf`):

kwargs:

type: dict

argument path: `init_reaction_mdata/build/resources[LSF]/kwargs`

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path:
`init_reaction_mdata/build/resources[LSF]/kwargs/gpu_usage`

Choosing if GPU is used in the calculation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path:
`init_reaction_mdata/build/resources[LSF]/kwargs/gpu_new_syntax`

For LFS >= 10.1.0.3, new option -gpu for #BSUB could be used. If False, and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path:
`init_reaction_mdata/build/resources[LSF]/kwargs/gpu_exclusive`

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
`init_reaction_mdata/build/resources[LSF]/kwargs/custom_gpu_line`

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to `Shell` (or its alias `shell`):

kwargs:

type: dict, optional
argument path: `init_reaction_mdata/build/resources[Shell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `PBS` (or its alias `pbs`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
build/resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to SGE (or its alias `sge`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
build/resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to Torque (or its alias `torque`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/
build/resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path:
init_reaction_mdata/build/user_forward_files

Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
argument path:
init_reaction_mdata/build/user_backward_files

Files to be backwarded from the remote machine.

fp:

type: dict
argument path: init_reaction_mdata/fp

Parameters of command, machine, and resources for fp

command:

type: str
argument path: init_reaction_mdata/fp/command
Command of a program.

machine:

type: dict
argument path: init_reaction_mdata/fp/machine

batch_type:

type: str
argument path: init_reaction_mdata/fp/
machine/batch_type

The batch job system type. Option: SGE,
Slurm, Shell, Torque, PBS, Bohrium, OpenAPI,
Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path: init_reaction_mdata/fp/
machine/local_root

The dir where the tasks and relating files locate.
Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path: init_reaction_mdata/fp/
machine/remote_root

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: init_reaction_mdata/fp/
machine/clean_asynchronously

Clean the remote directory asynchronously after the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)
argument path: init_reaction_mdata/fp/
machine/context_type
possible choices: *LocalContext*,
LazyLocalContext, *BohriumContext*,
HDFSContext, *SSHContext*,
OpenAPIContext

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFSContext, LazyLocalContext, BohriumContext, LocalContext

When `context_type` is set to `LocalContext` (or its aliases `localcontext`, `Local`, `local`):

remote_profile:

type: dict, optional
argument path: init_reaction_mdata/fp/
machine[LocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `LazyLocalContext` (or its aliases `lazylocalcontext`, `LazyLocal`, `lazylocal`):

remote_profile:

type: dict, optional
argument path: init_reaction_mdata/fp/
machine[LazyLocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict
argument path: init_reaction_mdata/fp/
machine[BohriumContext]/
remote_profile

The information used to maintain the connection with remote machine.

email:

type: str, optional
argument path:
init_reaction_mdata/fp/
machine[BohriumContext]/
remote_profile/email

Email

password:

type: str, optional
argument path:
init_reaction_mdata/fp/
machine[BohriumContext]/
remote_profile/password

Password

program_id:
type: int, alias: *project_id*
argument path:
init_reaction_mdata/fp/
machine[BohriumContext]/
remote_profile/program_id

Program ID

retry_count:
type: NoneType | int, optional,
default: 2
argument path:
init_reaction_mdata/fp/
machine[BohriumContext]/
remote_profile/retry_count

The retry count when a job is terminated

ignore_exit_code:
type: bool, optional, default: True
argument path:
init_reaction_mdata/fp/
machine[BohriumContext]/
remote_profile/
ignore_exit_code

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:
type: bool, optional
argument path:
init_reaction_mdata/fp/
machine[BohriumContext]/
remote_profile/keep_backup

keep download and upload zip

input_data:
type: dict
argument path:
init_reaction_mdata/fp/
machine[BohriumContext]/
remote_profile/input_data

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional

argument path: `init_reaction_mdata/fp/machine[HDFSContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: `dict`

argument path: `init_reaction_mdata/fp/machine[SSHContext]/remote_profile`

The information used to maintain the connection with remote machine.

hostname:

type: `str`

argument path:

`init_reaction_mdata/fp/machine[SSHContext]/remote_profile/hostname`

hostname or ip of ssh connection.

username:

type: `str`

argument path:

`init_reaction_mdata/fp/machine[SSHContext]/remote_profile/username`

username of target linux system

password:

type: `str`, optional

argument path:

`init_reaction_mdata/fp/machine[SSHContext]/remote_profile/password`

(deprecated) password of linux system. Please use [SSH keys](#) instead to improve security.

port:

type: `int`, optional, default: 22

argument path:

`init_reaction_mdata/fp/machine[SSHContext]/remote_profile/port`

ssh connection port.

```
key_filename:  
    type: str | NoneType, optional,  
    default: None  
    argument path:  
        init_reaction_mdata/fp/  
        machine[SSHContext]/  
        remote_profile/key_filename  
  
    key filename used by ssh connection.  
    If left None, find key in ~/.ssh or use  
    password for login  
  
passphrase:  
    type: str | NoneType, optional,  
    default: None  
    argument path:  
        init_reaction_mdata/fp/  
        machine[SSHContext]/  
        remote_profile/passphrase  
  
    passphrase of key used by ssh connec-  
    tion  
  
timeout:  
    type: int, optional, default: 10  
    argument path:  
        init_reaction_mdata/fp/  
        machine[SSHContext]/  
        remote_profile/timeout  
  
    timeout of ssh connection  
  
totp_secret:  
    type: str | NoneType, optional,  
    default: None  
    argument path:  
        init_reaction_mdata/fp/  
        machine[SSHContext]/  
        remote_profile/totp_secret  
  
    Time-based one time password se-  
    cret. It should be a base32-encoded  
    string extracted from the 2D code.  
  
tar_compress:  
    type: bool, optional, default: True  
    argument path:  
        init_reaction_mdata/fp/  
        machine[SSHContext]/  
        remote_profile/tar_compress  
  
    The archive will be compressed in up-  
    load and download if it is True. If not,  
    compression will be skipped.  
  
look_for_keys:  
    type: bool, optional, default: True
```

argument path:
init_reaction_mdata/fp/
machine[SSHContext]/
remote_profile/look_for_keys
enable searching for discoverable pri-
vate key files in ~/.ssh/

When `context_type` is set to `OpenAPIContext` (or its aliases `openapicontext`, `OpenAPI`, `openapi`):

remote_profile:

type: dict, optional
argument path: init_reaction_mdata/fp/
machine[OpenAPIContext]/
remote_profile

The information used to maintain the connec-
tion with remote machine. This field is empty
for this context.

resources:

type: dict
argument path: init_reaction_mdata/fp/resources

number_node:

type: int, optional, default: 1
argument path: init_reaction_mdata/fp/
resources/number_node

The number of node need for each *job*

cpu_per_node:

type: int, optional, default: 1
argument path: init_reaction_mdata/fp/
resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: init_reaction_mdata/fp/
resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)
argument path: init_reaction_mdata/fp/
resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int
argument path: init_reaction_mdata/fp/resources/group_size

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: typing.List[str], optional
argument path: init_reaction_mdata/fp/resources/custom_flags

The extra lines pass to job submitting script header

strategy:

type: dict, optional
argument path: init_reaction_mdata/fp/resources/strategy

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: bool, optional, default: False
argument path:
init_reaction_mdata/fp/resources/strategy/
if_cuda_multi_devices

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, dpp dispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task.Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:

type: float, optional, default: 0.0
argument path:
init_reaction_mdata/fp/resources/strategy/
ratio_unfinished

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: str, optional
argument path:
init_reaction_mdata/fp/

`resources/strategy/
customized_script_header_template_file`

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: int, optional, default: 1
argument path: `init_reaction_mdata/fp/
resources/para_deg`

Decide how many tasks will be run in parallel.

source_list:

type: `typing.List[str]`, optional, default: []
argument path: `init_reaction_mdata/fp/
resources/source_list`

The env file to be sourced before the command execution.

module_purge:

type: bool, optional, default: False
argument path: `init_reaction_mdata/fp/
resources/module_purge`

Remove all modules on HPC system before module load (module_list)

module_unload_list:

type: `typing.List[str]`, optional, default: []
argument path: `init_reaction_mdata/fp/
resources/module_unload_list`

The modules to be unloaded on HPC system before submitting jobs

module_list:

type: `typing.List[str]`, optional, default: []
argument path: `init_reaction_mdata/fp/
resources/module_list`

The modules to be loaded on HPC system before submitting jobs

envs:

type: dict, optional, default: {}
argument path: `init_reaction_mdata/fp/
resources/envs`

The environment variables to be exported on before submitting jobs

prepend_script:

type: `typing.List[str]`, optional, default:
[]

argument path: `init_reaction_mdata/fp/resources/prepend_script`

Optional script run before jobs submitted.

append_script:

type: `typing.List[str]`, optional, default:
[]

argument path: `init_reaction_mdata/fp/resources/append_script`

Optional script run after jobs submitted.

wait_time:

type: `float | int`, optional, default: 0

argument path: `init_reaction_mdata/fp/resources/wait_time`

The waiting time in second after a single *task* submitted

Depending on the value of `batch_type`, different sub args are accepted.

batch_type:

type: `str` (flag key)

argument path: `init_reaction_mdata/fp/resources/batch_type`

possible choices: `OpenAPI`,
`DistributedShell`, `Bohrium`, `Fugaku`,
`Slurm`, `SlurmJobArray`, `LSF`, `Shell`, `PBS`,
`SGE`, `Torque`

The batch job system type loaded from machine/`batch_type`.

When `batch_type` is set to `OpenAPI` (or its alias `openapi`):

kwargs:

type: `dict`, optional

argument path: `init_reaction_mdata/fp/resources[OpenAPI]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `DistributedShell` (or its alias `distributedshell`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[DistributedShell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Bohrium` (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[Bohrium]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Fugaku` (or its alias `fugaku`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[Fugaku]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[Slurm]/kwargs

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/fp/
resources[Slurm]/kwargs/
custom_gpu_line

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[SlurmJobArray]/kwargs

Extra arguments.

custom_gpu_line:
type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/fp/
resources[SlurmJobArray]/
kwargs/custom_gpu_line

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:
type: int, optional, default: 1
argument path:
init_reaction_mdata/fp/
resources[SlurmJobArray]/
kwargs/slurm_job_size

Number of tasks in a Slurm job

When batch_type is set to LSF (or its alias lsf):

kwargs:

type: dict
argument path: init_reaction_mdata/fp/
resources[LSF]/kwargs

Extra arguments.

gpu_usage:
type: bool, optional, default: False
argument path:
init_reaction_mdata/fp/
resources[LSF]/kwargs/
gpu_usage

Choosing if GPU is used in the calculation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path:
init_reaction_mdata/fp/
resources[LSF]/kwargs/
gpu_new_syntax

For LFS >= 10.1.0.3, new option -gpu
for #BSUB could be used. If False,
and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path:
init_reaction_mdata/fp/
resources[LSF]/kwargs/
gpu_exclusive

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
init_reaction_mdata/fp/
resources[LSF]/kwargs/
custom_gpu_line

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to `Shell` (or its alias `shell`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[Shell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `PBS` (or its alias `pbs`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to `SGE` (or its alias `sge`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Torque` (or its alias `torque`):

kwargs:

type: dict, optional
argument path: init_reaction_mdata/fp/
resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path:
init_reaction_mdata/fp/user_forward_files

Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional

argument path:

init_reaction_mdata/fp/user_backward_files

Files to be backwarded from the remote machine.

SIMPLIFY

6.1 Simplify

When you have a dataset containing lots of repeated data, this step will help you simplify your dataset. The workflow contains three stages: train, model_devi, and fp. The train stage and the fp stage are as the same as the run step, and the model_devi stage will calculate model deviations of the rest data that has not been confirmed accurate. Data with small model deviations will be confirmed accurate, while the program will pick data from those with large model deviations to the new dataset.

Use the following script to start the workflow:

```
dpgen simplify param.json machine.json
```

Here is an example of param.json for QM7 dataset:

```
{
  "type_map": [
    "C",
    "H",
    "N",
    "O",
    "S"
  ],
  "mass_map": [
    12.011,
    1.008,
    14.007,
    15.999,
    32.065
  ],
  "pick_data": "/scratch/jz748/simplify/qm7",
  "init_data_prefix": "",
  "init_data_sys": [],
  "sys_batch_size": [
    "auto"
  ],
  "numb_models": 4,
  "default_training_param": {
    "model": {
      "type_map": [
        "C",
        "H",
        "N",
        "O",
        "S"
      ]
    }
  }
}
```

(continues on next page)

(continued from previous page)

```

    "H",
    "N",
    "O",
    "S"
],
"descriptor": {
    "type": "se_a",
    "sel": [
        7,
        16,
        3,
        3,
        1
    ],
    "rcut_smth": 1.00,
    "rcut": 6.00,
    "neuron": [
        25,
        50,
        100
    ],
    "resnet_dt": false,
    "axis_neuron": 12
},
"fitting_net": {
    "neuron": [
        240,
        240,
        240
    ],
    "resnet_dt": true
},
},
"learning_rate": {
    "type": "exp",
    "start_lr": 0.001,
    "stop_lr": 5e-8,
    "decay_rate": 0.99
},
"loss": {
    "start_pref_e": 0.02,
    "limit_pref_e": 1,
    "start_pref_f": 1000,
    "limit_pref_f": 1,
    "start_pref_v": 0,
    "limit_pref_v": 0,
    "start_pref_pf": 0,
    "limit_pref_pf": 0
},
"training": {
    "set_prefix": "set",
    "numb_steps": 10000,

```

(continues on next page)

(continued from previous page)

```

    "disp_file": "lcurve.out",
    "disp_freq": 1000,
    "numb_test": 1,
    "save_freq": 1000,
    "disp_training": true,
    "time_training": true,
    "profiling": false,
    "profiling_file": "timeline.json"
  },
  "_comment": "that's all"
},
"fp_style": "gaussian",
"shuffle_poscar": false,
"fp_task_max": 1000,
"fp_task_min": 10,
"fp_pp_path": "/home/jzzeng/",
"fp_pp_files": [],
"fp_params": {
  "keywords": "mn15/6-31g** force nosymm scf(maxcyc=512)",
  "nproc": 28,
  "multiplicity": 1,
  "_comment": " that's all "
},
"init_pick_number": 100,
"iter_pick_number": 100,
"model_devi_f_trust_lo": 0.25,
"model_devi_f_trust_hi": 0.45,
"_comment": " that's all "
}

```

Here `pick_data` is the directory to data to simplify where the program recursively detects systems System with deepmd/npy format. `init_pick_number` and `iter_pick_number` are the numbers of picked frames. `model_devi_f_trust_lo` and `model_devi_f_trust_hi` mean the range of the max deviation of atomic forces in a frame. `fp_style` can be either gaussian or vasp currently. Other parameters are as the same as those of generator.

6.2 dpgen simplify parameters

Note: One can load, modify, and export the input file by using our effective web-based tool DP-GUI online or hosted using the `command line interface` `dpgen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

`simplify_jdata:`

type: dict

argument path: `simplify_jdata`

Parameters for `simplify.json`, the first argument of `dpgen simplify`.

`type_map:`

type: `list[str]`

argument path: `simplify_jdata/type_map`

Atom types. Reminder: The elements in param.json, type.raw and data.lmp(when using lammps) should be in the same order.

mass_map:

type: str | list[float], optional, default: auto

argument path: simplify_jdata/mass_map

Standard atomic weights (default: “auto”). if one want to use isotopes, or non-standard element names, chemical symbols, or atomic number in the type_map list, please customize the mass_map list instead of using “auto”.

use_ele_temp:

type: int, optional, default: 0

argument path: simplify_jdata/use_ele_temp

Currently only support fp_style vasp.

- 0: no electron temperature.
- 1: eletron temperature as frame parameter.
- 2: electron temperature as atom parameter.

init_data_prefix:

type: str, optional

argument path: simplify_jdata/init_data_prefix

Prefix of initial data directories.

init_data_sys:

type: list[str]

argument path: simplify_jdata/init_data_sys

Paths of initial data. The path can be either a system diretory containing NumPy files or an HDF5 file. You may use either absolute or relative path here. Systems will be detected recursively in the directories or the HDF5 file.

sys_format:

type: str, optional, default: vasp/poscar

argument path: simplify_jdata/sys_format

Format of sys_configs.

init_batch_size:

type: list[typing.Union[int, str]] | str, optional

argument path: simplify_jdata/init_batch_size

Each number is the batch_size of corresponding system for training in init_data_sys. One recommended rule for setting the sys_batch_size and init_batch_size is that batch_size mutiply number of atoms of the stucture should be larger than 32. If set to auto, batch size will be 32 divided by number of atoms. This argument will not override the mixed batch size in *default_training_param*.

sys_configs_prefix:

type: str, optional

argument path: simplify_jdata/sys_configs_prefix

Prefix of sys_configs.

sys_configs:

type: list[list[str]]

argument path: `simplify_jdata/sys_configs`

2D list. Containing directories of structures to be explored in iterations for each system. Wildcard characters are supported here.

sys_batch_size:

type: `list[typing.Union[int, str]]`, optional

argument path: `simplify_jdata/sys_batch_size`

Each number is the batch_size for training of corresponding system in `sys_configs`. If set to auto, batch size will be 32 divided by number of atoms. This argument will not override the mixed batch size in `default_training_param`.

labeled:

type: `bool`, optional, default: `False`

argument path: `simplify_jdata/labeled`

If true, the initial data is labeled.

pick_data:

type: `str | list[str]`

argument path: `simplify_jdata/pick_data`

(List of) Path to the directory with the pick data with the deepmd/npy or the HDF5 file with deepmd/hdf5 format. Systems are detected recursively.

init_pick_number:

type: `int`

argument path: `simplify_jdata/init_pick_number`

The number of initial pick data.

iter_pick_number:

type: `int`

argument path: `simplify_jdata/iter_pick_number`

The number of pick data in each iteration.

model_devi_f_trust_lo:

type: `float`

argument path: `simplify_jdata/model_devi_f_trust_lo`

The lower bound of forces for the selection for the model deviation.

model_devi_f_trust_hi:

type: `float`

argument path: `simplify_jdata/model_devi_f_trust_hi`

The higher bound of forces for the selection for the model deviation.

model_devi_e_trust_lo:

type: `float`, optional, default: `100000000000.0`

argument path: `simplify_jdata/model_devi_e_trust_lo`

The lower bound of energy per atom for the selection for the model deviation. Requires DeePMD-kit version >=2.2.2.

model_devi_e_trust_hi:

type: `float`, optional, default: `100000000000.0`

argument path: `simplify_jdata/model_devi_e_trust_hi`

The higher bound of energy per atom for the selection for the model deviation.
Requires DeePMD-kit version >=2.2.2.

true_error_f_trust_lo:

type: float, optional, default: `100000000000.0`

argument path: `simplify_jdata/true_error_f_trust_lo`

The lower bound of forces for the selection for the true error. Requires DeePMD-kit version >=2.2.4.

true_error_f_trust_hi:

type: float, optional, default: `100000000000.0`

argument path: `simplify_jdata/true_error_f_trust_hi`

The higher bound of forces for the selection for the true error. Requires DeePMD-kit version >=2.2.4.

true_error_e_trust_lo:

type: float, optional, default: `100000000000.0`

argument path: `simplify_jdata/true_error_e_trust_lo`

The lower bound of energy per atom for the selection for the true error. Requires DeePMD-kit version >=2.2.4.

true_error_e_trust_hi:

type: float, optional, default: `100000000000.0`

argument path: `simplify_jdata/true_error_e_trust_hi`

The higher bound of energy per atom for the selection for the true error. Requires DeePMD-kit version >=2.2.4.

numb_models:

type: int

argument path: `simplify_jdata/numb_models`

Number of models to be trained in 00.train. 4 is recommend.

training_iter0_model_path:

type: list[str], optional

argument path: `simplify_jdata/training_iter0_model_path`

The model used to init the first iter training. Number of element should be equal to numb_models.

training_init_model:

type: bool, optional

argument path: `simplify_jdata/training_init_model`

Iteration > 0, the model parameters will be initialized from the model trained at the previous iteration. Iteration == 0, the model parameters will be initialized from training_iter0_model_path.

default_training_param:

type: dict

argument path: `simplify_jdata/default_training_param`

Training parameters for deepmd-kit in 00.train. You can find instructions from DeePMD-kit documentation.

dp_train_skip_neighbor_stat:
 type: bool, optional, default: False
 argument path: simplify_jdata/dp_train_skip_neighbor_stat
 Append –skip-neighbor-stat flag to dp train.

dp_compress:
 type: bool, optional, default: False
 argument path: simplify_jdata/dp_compress
 Use dp compress to compress the model.

training_reuse_iter:
 type: int | NoneType, optional
 argument path: simplify_jdata/training_reuse_iter
 The minimal index of iteration that continues training models from old models of last iteration.

training_reuse_old_ratio:
 type: str | float, optional, default: auto
 argument path: simplify_jdata/training_reuse_old_ratio
 The probability proportion of old data during training. It can be:

- float: directly assign the probability of old data;
- *auto:f*: automatic probability, where f is the new-to-old ratio;
- *auto*: equivalent to *auto:10*.

 This option is only adopted when continuing training models from old models. This option will override default parameters.

training_reuse_numb_steps:
 type: int | NoneType, optional, default: None, alias:
`training_reuse_stop_batch`
 argument path: simplify_jdata/training_reuse_numb_steps
 Number of training batch. This option is only adopted when continuing training models from old models. This option will override default parameters.

training_reuse_start_lr:
 type: float | NoneType, optional, default: None
 argument path: simplify_jdata/training_reuse_start_lr
 The learning rate the start of the training. This option is only adopted when continuing training models from old models. This option will override default parameters.

training_reuse_start_pref_e:
 type: int | float | NoneType, optional, default: None
 argument path: simplify_jdata/training_reuse_start_pref_e
 The prefactor of energy loss at the start of the training. This option is only adopted when continuing training models from old models. This option will override default parameters.

training_reuse_start_pref_f:
 type: int | float | NoneType, optional, default: None

argument path: `simplify_jdata/training_reuse_start_pref_f`

The prefactor of force loss at the start of the training. This option is only adopted when continuing training models from old models. This option will override default parameters.

`model_devi_activation_func:`

type: `list[list[str]] | NoneType`, optional

argument path: `simplify_jdata/model_devi_activation_func`

The activation function in the model. The shape of list should be (N_models, 2), where 2 represents the embedding and fitting network. This option will override default parameters.

`srtab_file_path:`

type: `str`, optional

argument path: `simplify_jdata/srtab_file_path`

The path of the table for the short-range pairwise interaction which is needed when using DP-ZBL potential

`one_h5:`

type: `bool`, optional, default: `False`

argument path: `simplify_jdata/one_h5`

When using DeePMD-kit, all of the input data will be merged into one HDF5 file.

`training_init_frozen_model:`

type: `list[str]`, optional

argument path: `simplify_jdata/training_init_frozen_model`

At interation 0, initilize the model parameters from the given frozen models. Number of element should be equal to `numb_models`.

`training_finetune_model:`

type: `list[str]`, optional

argument path: `simplify_jdata/training_finetune_model`

At interation 0, finetune the model parameters from the given frozen models. Number of element should be equal to `numb_models`.

`fp_task_max:`

type: `int`, optional

argument path: `simplify_jdata/fp_task_max`

Maximum of structures to be calculated in 02.fp of each iteration.

`fp_task_min:`

type: `int`, optional

argument path: `simplify_jdata/fp_task_min`

Minimum of structures to be calculated in 02.fp of each iteration.

`fp_accurate_threshold:`

type: `float`, optional

argument path: `simplify_jdata/fp_accurate_threshold`

If the accurate ratio is larger than this number, no fp calculation will be performed, i.e. `fp_task_max = 0`.

fp_accurate_soft_threshold:
 type: float, optional
 argument path: simplify_jdata/fp_accurate_soft_threshold
 If the accurate ratio is between this number and fp_accurate_threshold, the fp_task_max linearly decays to zero.

ratio_failed:
 type: float, optional
 argument path: simplify_jdata/ratio_failed
 Check the ratio of unsuccessfully terminated jobs. If too many FP tasks are not converged, RuntimeError will be raised.

Depending on the value of *fp_style*, different sub args are accepted.

fp_style:
 type: str (flag key), default: none
 argument path: simplify_jdata/fp_style
 possible choices: *none*, *vasp*, *gaussian*, *siesta*, *cp2k*, *abacus*, *pwmatt*, *pwscf*, *custom*
 Software for First Principles, if *labeled* is false.

When *fp_style* is set to *none*:
 No fp.

When *fp_style* is set to *vasp*:
 VASP.

fp_pp_path:
 type: str
 argument path: simplify_jdata[vasp]/fp_pp_path
 Directory of psuedo-potential file to be used for 02.fp exists.

fp_pp_files:
 type: list[str]
 argument path: simplify_jdata[vasp]/fp_pp_files
 Psuedo-potential file to be used for 02.fp. Note that the order of elements should correspond to the order in *type_map*.

fp_incar:
 type: str
 argument path: simplify_jdata[vasp]/fp_incar
 Input file for VASP. INCAR must specify KSPACING and KGAMMA.

fp_aniso_kspacing:
 type: list[float], optional
 argument path: simplify_jdata[vasp]/fp_aniso_kspacing
 Set anisotropic kspacing. Usually useful for 1-D or 2-D materials. Only support VASP. If it is setting the KSPACING key in INCAR will be ignored.

cvasp:

type: bool, optional

argument path: simplify_jdata[vasp]/cvasp

If cvasp is true, DP-GEN will use Custodian to help control VASP calculation.

fp_skip_bad_box:

type: str, optional

argument path: simplify_jdata[vasp]/fp_skip_bad_box

Skip the configurations that are obviously unreasonable before 02.fp

When fp_style is set to gaussian:

Gaussian. The command should be set as g16 < input.

use_clusters:

type: bool, optional, default: False

argument path: simplify_jdata[gaussian]/use_clusters

If set to true, clusters will be taken instead of the whole system.

cluster_cutoff:

type: float, optional

argument path: simplify_jdata[gaussian]/cluster_cutoff

The soft cutoff radius of clusters if use_clusters is set to true. Molecules will be taken as whole even if part of atoms is out of the cluster. Use cluster_cutoff_hard to only take atoms within the hard cutoff radius.

cluster_cutoff_hard:

type: float, optional

argument path: simplify_jdata[gaussian]/cluster_cutoff_hard

The hard cutoff radius of clusters if use_clusters is set to true. Outside the hard cutoff radius, atoms will not be taken even if they are in a molecule where some atoms are within the cutoff radius.

cluster_minify:

type: bool, optional, default: False

argument path: simplify_jdata[gaussian]/cluster_minify

If enabled, when an atom within the soft cutoff radius connects a single bond with a non-hydrogen atom out of the soft cutoff radius, the outer atom will be replaced by a hydrogen atom. When the outer atom is a hydrogen atom, the outer atom will be kept. In this case, other atoms out of the soft cutoff radius will be removed.

fp_params:

type: dict

argument path: simplify_jdata[gaussian]/fp_params

Parameters for Gaussian calculation.

keywords:

type: str | list[str]

argument path:

simplify_jdata[gaussian]/fp_params/keywords

Keywords for Gaussian input, e.g. force b3lyp/6-31g**. If a list, run multiple steps.

multiplicity:

type: str | int, optional, default: auto
argument path: simplify_jdata[gaussian]/fp_params/multiplicity

Spin multiplicity for Gaussian input. If *auto*, multiplicity will be detected automatically, with the following rules: when fragment_guesses=True, multiplicity will +1 for each radical, and +2 for each oxygen molecule; when fragment_guesses=False, multiplicity will be 1 or 2, but +2 for each oxygen molecule.

nproc:

type: int
argument path:
simplify_jdata[gaussian]/fp_params/nproc

The number of processors for Gaussian input.

charge:

type: int, optional, default: 0
argument path:
simplify_jdata[gaussian]/fp_params/charge

Molecule charge. Only used when charge is not provided by the system.

fragment_guesses:

type: bool, optional, default: False
argument path: simplify_jdata[gaussian]/fp_params/fragment_guesses

Initial guess generated from fragment guesses. If True, *multiplicity* should be *auto*.

basis_set:

type: str, optional
argument path:
simplify_jdata[gaussian]/fp_params/basis_set

Custom basis set.

keywords_high_multiplicity:

type: str, optional
argument path: simplify_jdata[gaussian]/fp_params/keywords_high_multiplicity

Keywords for points with multiple radicals. *multiplicity* should be *auto*. If not set, fallback to normal keywords.

When `fp_style` is set to `siesta`:

use_clusters:

type: bool, optional

argument path: simplify_jdata[siesta]/use_clusters

If set to true, clusters will be taken instead of the whole system. This option does not work with DeePMD-kit 0.x.

cluster_cutoff:

type: float, optional

argument path: simplify_jdata[siesta]/cluster_cutoff

The cutoff radius of clusters if use_clusters is set to true.

fp_params:

type: dict

argument path: simplify_jdata[siesta]/fp_params

Parameters for siesta calculation.

ecut:

type: int

argument path:

simplify_jdata[siesta]/fp_params/ecut

Define the plane wave cutoff for grid.

ediff:

type: float

argument path:

simplify_jdata[siesta]/fp_params/ediff

Tolerance of Density Matrix.

kspacing:

type: float

argument path:

simplify_jdata[siesta]/fp_params/kspacing

Sample factor in Brillouin zones.

mixingWeight:

type: float

argument path:

simplify_jdata[siesta]/fp_params/mixingWeight

Proportion α of output Density Matrix to be used for the input Density Matrix of next SCF cycle (linear mixing).

NumberPulay:

type: int

argument path:

simplify_jdata[siesta]/fp_params/NumberPulay

Controls the Pulay convergence accelerator.

fp_pp_path:

type: str

argument path: simplify_jdata[siesta]/fp_pp_path

Directory of psuedo-potential or numerical orbital files to be used for 02.fp exists.

fp_pp_files:

type: list[str]

argument path: simplify_jdata[siesta]/fp_pp_files

Psuedo-potential file to be used for 02.fp. Note that the order of elements should correspond to the order in type_map.

When fp_style is set to cp2k:

user_fp_params:

type: dict, optional, alias: fp_params

argument path: simplify_jdata[cp2k]/user_fp_params

Parameters for cp2k calculation. find detail in manual.cp2k.org. only the kind section must be set before use. we assume that you have basic knowledge for cp2k input.

external_input_path:

type: str, optional

argument path: simplify_jdata[cp2k]/external_input_path

Conflict with key:user_fp_params. enable the template input provided by user. some rules should be followed, read the following text in detail:

1. One must present a KEYWORD ABC in the section CELL so that the DP-GEN can replace the cell on-the-fly.
2. One need to add these lines under FORCE_EVAL section to print forces and stresses:

```
STRESS_TENSOR ANALYTICAL
&PRINT
  &FORCES ON
  &END FORCES
  &STRESS_TENSOR ON
  &END STRESS_TENSOR
&END PRINT
```

When fp_style is set to abacus:

fp_pp_path:

type: str

argument path: simplify_jdata[abacus]/fp_pp_path

Directory of psuedo-potential or numerical orbital files to be used for 02.fp exists.

fp_pp_files:

type: list[str]

argument path: simplify_jdata[abacus]/fp_pp_files

Psuedo-potential file to be used for 02.fp. Note that the order of elements should correspond to the order in type_map.

fp_orb_files:

type: list[str], optional

argument path: simplify_jdata[abacus]/fp_orb_files

numerical orbital file to be used for 02.fp when using LCAO basis. Note that the order of elements should correspond to the order in type_map.

fp_incar:

type: str, optional

argument path: simplify_jdata[abacus]/fp_incar

Input file for ABACUS. This is optional but the priority is lower than user_fp_params, and you should not set user_fp_params if you want to use fp_incar.

fp_kpt_file:

type: str, optional

argument path: simplify_jdata[abacus]/fp_kpt_file

KPT file for ABACUS. If the “kspacing” or “gamma_only=1” is defined in INPUT or “k_points” is defined, fp_kpt_file will be ignored.

fp_dpks_descriptor:

type: str, optional

argument path: simplify_jdata[abacus]/fp_dpks_descriptor

DeePKS descriptor file name. The file should be in pseudopotential directory.

user_fp_params:

type: dict, optional

argument path: simplify_jdata[abacus]/user_fp_params

Set the key and value of INPUT.

k_points:

type: list[int], optional

argument path: simplify_jdata[abacus]/k_points

Monkhorst-Pack k-grids setting for generating KPT file of ABACUS, such as: [1,1,1,0,0,0]. NB: if “kspacing” or “gamma_only=1” is defined in INPUT, k_points will be ignored.

When `fp_style` is set to `pwmat`:

TODO: add doc

When `fp_style` is set to `pwscf`:

pwscf (Quantum Espresso).

fp_pp_path:

type: str

argument path: simplify_jdata[pwscf]/fp_pp_path

Directory of psuedo-potential file to be used for 02.fp exists.

fp_pp_files:

type: list[str]

argument path: `simplify_jdata[pwscf]/fp_pp_files`

Pseudo-potential file to be used for 02.fp. Note that the order of elements should correspond to the order in type_map.

fp_params:

type: dict, optional

argument path: `simplify_jdata[pwscf]/fp_params`

Parameters for pwscf calculation. It has lower priority than user_fp_params.

ecut:

type: float

argument path:

`simplify_jdata[pwscf]/fp_params/ecut`

ecutwfc in pwscf.

ediff:

type: float

argument path:

`simplify_jdata[pwscf]/fp_params/ediff`

conv_thr and ts_vdw_econv_thr in pwscf.

smearing:

type: str

argument path:

`simplify_jdata[pwscf]/fp_params/smearing`

smearing in pwscf.

sigma:

type: float

argument path:

`simplify_jdata[pwscf]/fp_params/sigma`

degauss in pwscf.

kspacing:

type: float

argument path:

`simplify_jdata[pwscf]/fp_params/kspacing`

The spacing between kpoints. Helps to determin KPOINTS in pwscf.

user_fp_params:

type: dict, optional

argument path: `simplify_jdata[pwscf]/user_fp_params`

Parameters for pwscf calculation. Find details at https://www.quantum-espresso.org/Doc/INPUT_PW.html. When user_fp_params is set, the settings in fp_params will be ignored. If one wants to use user_fp_params, kspacing must be set in user_fp_params. kspacing is the spacing between kpoints, and helps to determin KPOINTS in pwscf.

When `fp_style` is set to `custom`:

Custom FP code. You need to provide the input and output file format and name. The command argument in the machine file should be the script to run custom FP codes. The extra forward and backward files can be defined in the machine file.

fp_params:

type: dict
argument path: `simplify_jdata[custom]/fp_params`

Parameters for FP calculation.

input_fmt:

type: str
argument path:
`simplify_jdata[custom]/fp_params/input_fmt`

Input dpdata format of the custom FP code. Such format should only need the first argument as the file name.

input_fn:

type: str
argument path:
`simplify_jdata[custom]/fp_params/input_fn`

Input file name of the custom FP code.

output_fmt:

type: str
argument path:
`simplify_jdata[custom]/fp_params/output_fmt`

Output ddata format of the custom FP code. Such format should only need the first argument as the file name.

output_fn:

type: str
argument path:
`simplify_jdata[custom]/fp_params/output_fn`

Output file name of the custom FP code.

6.3 dpgen simplify machine parameters

Note: One can load, modify, and export the input file by using our effective web-based tool [DP-GUI](#) online or hosted using the [command line interface](#) `dpgen gui`. All parameters below can be set in DP-GUI. By clicking “SAVE JSON”, one can download the input file.

simplify_mdata:

type: dict
argument path: `simplify_mdata`
machine.json file

```
api_version:  
    type: str, optional, default: 1.0  
    argument path: simplify_mdata/api_version  
    Please set to 1.0  
  
deepmd_version:  
    type: str, optional, default: 2  
    argument path: simplify_mdata/deepmd_version  
    DeePMD-kit version, e.g. 2.1.3  
  
train:  
    type: dict  
    argument path: simplify_mdata/train  
    Parameters of command, machine, and resources for train  
  
    command:  
        type: str  
        argument path: simplify_mdata/train/command  
        Command of a program.  
  
    machine:  
        type: dict  
        argument path: simplify_mdata/train/machine  
  
    batch_type:  
        type: str  
        argument path: simplify_mdata/train/  
        machine/batch_type  
        The batch job system type. Option: SGE,  
        Slurm, Shell, Torque, PBS, Bohrium, OpenAPI,  
        Fugaku, SlurmJobArray, LSF, DistributedShell  
  
    local_root:  
        type: str | NoneType  
        argument path: simplify_mdata/train/  
        machine/local_root  
        The dir where the tasks and relating files locate.  
        Typically the project dir.  
  
    remote_root:  
        type: str | NoneType, optional  
        argument path: simplify_mdata/train/  
        machine/remote_root  
        The dir where the tasks are executed on the re-  
        mote machine. Only needed when context is  
        not lazy-local.
```

clean_asynchronously:

type: bool, optional, default: False
argument path: `simplify_mdata/train/machine/clean_asynchronously`

Clean the remote directory asynchronously after the job finishes.

Depending on the value of `context_type`, different sub args are accepted.

context_type:

type: str (flag key)
argument path: `simplify_mdata/train/machine/context_type`
possible choices: `LocalContext`,
`LazyLocalContext`, `BohriumContext`,
`HDFSContext`, `SSHContext`,
`OpenAPIContext`

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFSContext, LazyLocalContext, BohriumContext, LocalContext

When `context_type` is set to `LocalContext` (or its aliases `localcontext`, `Local`, `local`):

remote_profile:

type: dict, optional
argument path: `simplify_mdata/train/machine[LocalContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `LazyLocalContext` (or its aliases `lazylocalcontext`, `LazyLocal`, `lazyllocal`):

remote_profile:

type: dict, optional
argument path: `simplify_mdata/train/machine[LazyLocalContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

```
remote_profile:
    type: dict
    argument path: simplify_mdata/train/
                    machine[BohriumContext]/
                    remote_profile

    The information used to maintain the connection with remote machine.

email:
    type: str, optional
    argument path:
        simplify_mdata/train/
        machine[BohriumContext]/
        remote_profile/email

    Email

password:
    type: str, optional
    argument path:
        simplify_mdata/train/
        machine[BohriumContext]/
        remote_profile/password

    Password

program_id:
    type: int, alias: project_id
    argument path:
        simplify_mdata/train/
        machine[BohriumContext]/
        remote_profile/program_id

    Program ID

retry_count:
    type: NoneType | int, optional,
    default: 2
    argument path:
        simplify_mdata/train/
        machine[BohriumContext]/
        remote_profile/retry_count

    The retry count when a job is terminated

ignore_exit_code:
    type: bool, optional, default: True
    argument path:
        simplify_mdata/train/
        machine[BohriumContext]/
        remote_profile/
        ignore_exit_code
```

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:

type: bool, optional
argument path:
simplify_mdata/train/
machine[BohriumContext]/
remote_profile/keep_backup

keep download and upload zip

input_data:

type: dict
argument path:
simplify_mdata/train/
machine[BohriumContext]/
remote_profile/input_data

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional
argument path: simplify_mdata/train/
machine[HDFSContext]/remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
argument path: simplify_mdata/train/
machine[SSHContext]/remote_profile

The information used to maintain the connection with remote machine.

hostname:

type: str
argument path: simplify_mdata/
train/machine[SSHContext]/
remote_profile/hostname

hostname or ip of ssh connection.

username:

type: str

argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/username`

username of target linux system

password:

type: `str`, optional

argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/password`

(deprecated) password of linux system. Please use [SSH keys](#) instead to improve security.

port:

type: `int`, optional, default: 22

argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/port`

ssh connection port.

key_filename:

type: `str | NoneType`, optional,
default: `None`

argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/key_filename`

key filename used by ssh connection.
If left `None`, find key in `~/.ssh` or use password for login

passphrase:

type: `str | NoneType`, optional,
default: `None`

argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/passphrase`

passphrase of key used by ssh connection

timeout:

type: `int`, optional, default: 10

argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/timeout`

timeout of ssh connection

totp_secret:

type: `str | NoneType`, optional,
default: `None`

argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/totp_secret`

Time-based one time password secret. It should be a base32-encoded string extracted from the 2D code.

`tar_compress:`

type: bool, optional, default: True
argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/tar_compress`

The archive will be compressed in upload and download if it is True. If not, compression will be skipped.

`look_for_keys:`

type: bool, optional, default: True
argument path: `simplify_mdata/train/machine[SSHContext]/remote_profile/look_for_keys`
enable searching for discoverable private key files in `~/.ssh/`

When `context_type` is set to `OpenAPIContext` (or its aliases `openapicontext`, `OpenAPI`, `openapi`):

`remote_profile:`

type: dict, optional
argument path: `simplify_mdata/train/machine[OpenAPIContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

`resources:`

type: dict
argument path: `simplify_mdata/train/resources`

`number_node:`

type: int, optional, default: 1
argument path: `simplify_mdata/train/resources/number_node`

The number of node need for each *job*

`cpu_per_node:`

type: int, optional, default: 1
argument path: `simplify_mdata/train/resources/cpu_per_node`

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0

argument path: simplify_mdata/train/resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)

argument path: simplify_mdata/train/resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int

argument path: simplify_mdata/train/resources/group_size

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: typing.List[str], optional

argument path: simplify_mdata/train/resources/custom_flags

The extra lines pass to job submitting script header

strategy:

type: dict, optional

argument path: simplify_mdata/train/resources/strategy

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: bool, optional, default: False

argument path: simplify_mdata/train/resources/strategy/if_cuda_multi_devices

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, dpdispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task.Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:

type: float, optional, default: 0.0
argument path: simplify_mdata/
train/resources/strategy/
ratio_unfinished

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: str, optional
argument path: simplify_mdata/
train/resources/strategy/
customized_script_header_template_file

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: int, optional, default: 1
argument path: simplify_mdata/train/
resources/para_deg

Decide how many tasks will be run in parallel.

source_list:

type: typing.List[str], optional, default:
[]
argument path: simplify_mdata/train/
resources/source_list

The env file to be sourced before the command execution.

module_purge:

type: bool, optional, default: False
argument path: simplify_mdata/train/
resources/module_purge

Remove all modules on HPC system before module load (module_list)

module_unload_list:

type: typing.List[str], optional, default:
[]
argument path: simplify_mdata/train/
resources/module_unload_list

The modules to be unloaded on HPC system before submitting jobs

module_list:

type: typing.List[str], optional, default:
[]

argument path: `simplify_mdata/train/resources/module_list`

The modules to be loaded on HPC system before submitting jobs

envs:

type: `dict`, optional, default: {}

argument path:

`simplify_mdata/train/resources/envs`

The environment variables to be exported on before submitting jobs

prepend_script:

type: `typing.List[str]`, optional, default: []

argument path: `simplify_mdata/train/resources/prepend_script`

Optional script run before jobs submitted.

append_script:

type: `typing.List[str]`, optional, default: []

argument path: `simplify_mdata/train/resources/append_script`

Optional script run after jobs submitted.

wait_time:

type: `float | int`, optional, default: 0

argument path: `simplify_mdata/train/resources/wait_time`

The waiting time in second after a single *task* submitted

Depending on the value of `batch_type`, different sub args are accepted.

batch_type:

type: `str` (flag key)

argument path: `simplify_mdata/train/resources/batch_type`

possible choices: `OpenAPI`,
`DistributedShell`, `Bohrium`, `Fugaku`,
`Slurm`, `SlurmJobArray`, `LSF`, `Shell`, `PBS`,
`SGE`, `Torque`

The batch job system type loaded from machine/`batch_type`.

When `batch_type` is set to `OpenAPI` (or its alias `openapi`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/resources[OpenAPI]/kwargs

This field is empty for this batch.

When `batch_type` is set to `DistributedShell` (or its alias `distributedshell`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/resources[DistributedShell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Bohrium` (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/resources[Bohrium]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Fugaku` (or its alias `fugaku`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/resources[Fugaku]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/resources[Slurm]/kwargs

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: simplify_mdata/
train/resources[Slurm]/
kwargs/custom_gpu_line

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/resources[SlurmJobArray]/kwargs

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path:
simplify_mdata/train/
resources[SlurmJobArray]/
kwargs/custom_gpu_line

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:

type: int, optional, default: 1
argument path:
simplify_mdata/train/
resources[SlurmJobArray]/
kwargs/slurm_job_size

Number of tasks in a Slurm job

When batch_type is set to LSF (or its alias lsf):

kwargs:

type: dict
argument path: simplify_mdata/train/
resources[LSF]/kwargs

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path: simplify_mdata/
train/resources[LSF]/kwargs/
gpu_usage

Choosing if GPU is used in the calcu-
lation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path: simplify_mdata/
train/resources[LSF]/kwargs/
gpu_new_syntax

For LFS >= 10.1.0.3, new option -gpu
for #BSUB could be used. If False,
and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path: simplify_mdata/
train/resources[LSF]/kwargs/
gpu_exclusive

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: simplify_mdata/
train/resources[LSF]/kwargs/
custom_gpu_line

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to `Shell` (or its alias `shell`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/
resources[Shell]/kwargs

This field is empty for this batch.

When `batch_type` is set to `PBS` (or its alias `pbs`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/
resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to `SGE` (or its alias `sge`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/
resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to `Torque` (or its alias `torque`):

kwargs:

type: dict, optional
argument path: simplify_mdata/train/
resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path: simplify_mdata/train/user_forward_files
Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
argument path: simplify_mdata/train/user_backward_files
Files to be backwarded from the remote machine.

model_devi:

type: dict
argument path: simplify_mdata/model_devi
Parameters of command, machine, and resources for model_devi

command:

type: str
argument path: simplify_mdata/model_devi/command
Command of a program.

machine:

type: dict
argument path: simplify_mdata/model_devi/machine

batch_type:

type: str
argument path: simplify_mdata/
model_devi/machine/batch_type
The batch job system type. Option: SGE,
Slurm, Shell, Torque, PBS, Bohrium, OpenAPI, Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path: simplify_mdata/
model_devi/machine/local_root
The dir where the tasks and relating files locate.
Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path: simplify_mdata/
model_devi/machine/remote_root

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False

argument path:

simplify_mdata/model_devi/machine/
clean_asynchronously

Clean the remote directory asynchronously after the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)

argument path: simplify_mdata/
model_devi/machine/context_type

possible choices: *LocalContext*,
LazyLocalContext, *BohriumContext*,
HDFSContext, *SSHContext*,
OpenAPIContext

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFSContext, LazyLocalContext, BohriumContext, LocalContext

When *context_type* is set to *LocalContext* (or its aliases localcontext, Local, local):

remote_profile:

type: dict, optional

argument path: simplify_mdata/
model_devi/machine[LocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When *context_type* is set to *LazyLocalContext* (or its aliases lazylocalcontext, LazyLocal, lazylocal):

remote_profile:

type: dict, optional

argument path:

simplify_mdata/model_devi/
machine[LazyLocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict
argument path: `simplify_mdata/`
`model_devi/machine[BohriumContext]/`
`remote_profile`

The information used to maintain the connection with remote machine.

email:

type: str, optional
argument path:
`simplify_mdata/model_devi/`
`machine[BohriumContext]/`
`remote_profile/email`

Email

password:

type: str, optional
argument path:
`simplify_mdata/model_devi/`
`machine[BohriumContext]/`
`remote_profile/password`

Password

program_id:

type: int, alias: `project_id`
argument path:
`simplify_mdata/model_devi/`
`machine[BohriumContext]/`
`remote_profile/program_id`

Program ID

retry_count:

type: NoneType | int, optional,
default: 2
argument path:
`simplify_mdata/model_devi/`
`machine[BohriumContext]/`
`remote_profile/retry_count`

The retry count when a job is terminated

ignore_exit_code:

type: bool, optional, default: True

argument path:
simplify_mdata/model_devi/
machine[BohriumContext]/
remote_profile/
ignore_exit_code

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:

type: bool, optional
argument path:
simplify_mdata/model_devi/
machine[BohriumContext]/
remote_profile/keep_backup

keep download and upload zip

input_data:

type: dict
argument path:
simplify_mdata/model_devi/
machine[BohriumContext]/
remote_profile/input_data

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: dict, optional
argument path:
simplify_mdata/model_devi/
machine[HDFSContext]/remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: dict
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/remote_profile

The information used to maintain the connection with remote machine.

hostname:

type: str

argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/hostname
hostname or ip of ssh connection.

username:

type: str
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/username
username of target linux system

password:

type: str, optional
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/password
(deprecated) password of linux system. Please use [SSH keys](#) instead to improve security.

port:

type: int, optional, default: 22
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/port
ssh connection port.

key_filename:

type: str | NoneType, optional,
default: None
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/key_filename
key filename used by ssh connection.
If left None, find key in ~/.ssh or use password for login

passphrase:

type: str | NoneType, optional,
default: None
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/passphrase
passphrase of key used by ssh connection

timeout:
type: int, optional, default: 10
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/timeout

timeout of ssh connection

totp_secret:
type: str | NoneType, optional,
default: None
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/totp_secret

Time-based one time password secret. It should be a base32-encoded string extracted from the 2D code.

tar_compress:
type: bool, optional, default: True
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/tar_compress

The archive will be compressed in upload and download if it is True. If not, compression will be skipped.

look_for_keys:
type: bool, optional, default: True
argument path:
simplify_mdata/model_devi/
machine[SSHContext]/
remote_profile/look_for_keys
enable searching for discoverable private key files in ~/.ssh/

When `context_type` is set to `OpenAPIContext` (or its aliases `openapicontext`, `OpenAPI`, `openapi`):

remote_profile:

type: dict, optional
argument path: simplify_mdata/
model_devi/machine[OpenAPIContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

resources:

```
type: dict
argument path:
simplify_mdata/model_devi/resources

number_node:

type: int, optional, default: 1
argument path: simplify_mdata/
model_devi/resources/number_node

The number of node need for each job

cpu_per_node:

type: int, optional, default: 1
argument path: simplify_mdata/
model_devi/resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: simplify_mdata/
model_devi/resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)
argument path: simplify_mdata/
model_devi/resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int
argument path: simplify_mdata/
model_devi/resources/group_size

The number of tasks in a job. 0 means infinity.

custom_flags:

type: typing.List[str], optional
argument path: simplify_mdata/
model_devi/resources/custom_flags

The extra lines pass to job submitting script
header

strategy:

type: dict, optional
argument path: simplify_mdata/
model_devi/resources/strategy

strategies we use to generation job submitting
scripts.
```

if_cuda_multi_devices:
type: bool, optional, default: False
argument path:
simplify_mdata/model_devi/
resources/strategy/
if_cuda_multi_devices

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, dDispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task.Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:
type: float, optional, default: 0.0
argument path: simplify_mdata/
model_devi/resources/
strategy/ratio_unfinished

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:
type: str, optional
argument path:
simplify_mdata/model_devi/
resources/strategy/
customized_script_header_template_file

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:
type: int, optional, default: 1
argument path: simplify_mdata/
model_devi/resources/para_deg

Decide how many tasks will be run in parallel.

source_list:
type: typing.List[str], optional, default:
[]
argument path: simplify_mdata/
model_devi/resources/source_list

The env file to be sourced before the command execution.

module_purge:
type: bool, optional, default: False

argument path: `simplify_mdata/model_devi/resources/module_purge`

Remove all modules on HPC system before module load (module_list)

module_unload_list:

type: `typing.List[str]`, optional, default: `[]`

argument path:
`simplify_mdata/model_devi/resources/module_unload_list`

The modules to be unloaded on HPC system before submitting jobs

module_list:

type: `typing.List[str]`, optional, default: `[]`

argument path: `simplify_mdata/model_devi/resources/module_list`

The modules to be loaded on HPC system before submitting jobs

envs:

type: `dict`, optional, default: `{}`

argument path: `simplify_mdata/model_devi/resources/envs`

The environment variables to be exported on before submitting jobs

prepend_script:

type: `typing.List[str]`, optional, default: `[]`

argument path: `simplify_mdata/model_devi/resources/prepend_script`

Optional script run before jobs submitted.

append_script:

type: `typing.List[str]`, optional, default: `[]`

argument path: `simplify_mdata/model_devi/resources/append_script`

Optional script run after jobs submitted.

wait_time:

type: `float | int`, optional, default: `0`

argument path: `simplify_mdata/model_devi/resources/wait_time`

The waiting time in second after a single *task* submitted

Depending on the value of *batch_type*, different sub args are accepted.

batch_type:

type: str (flag key)
argument path: `simplify_mdata/model_devi/resources/batch_type`
possible choices: [OpenAPI](#),
[DistributedShell](#), [Bohrium](#), [Fugaku](#),
[Slurm](#), [SlurmJobArray](#), [LSF](#), [Shell](#), [PBS](#),
[SGE](#), [Torque](#)

The batch job system type loaded from machine/*batch_type*.

When `batch_type` is set to [OpenAPI](#) (or its alias `openapi`):

kwargs:

type: dict, optional
argument path:
`simplify_mdata/model_devi/resources[OpenAPI]/kwargs`

This field is empty for this batch.

When `batch_type` is set to [DistributedShell](#) (or its alias `distributedshell`):

kwargs:

type: dict, optional
argument path:
`simplify_mdata/model_devi/resources[DistributedShell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to [Bohrium](#) (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: dict, optional
argument path:
`simplify_mdata/model_devi/resources[Bohrium]/kwargs`

This field is empty for this batch.

When `batch_type` is set to [Fugaku](#) (or its alias `fugaku`):

kwargs:

type: dict, optional

argument path: `simplify_mdata/model_devi/resources[Fugaku]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: `dict`, optional

argument path: `simplify_mdata/model_devi/resources[Slurm]/kwargs`

Extra arguments.

custom_gpu_line:

type: `str | NoneType`, optional,

default: `None`

argument path: `simplify_mdata/model_devi/resources[Slurm]/kwargs/custom_gpu_line`

Custom GPU configuration, starting with `#SBATCH`

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: `dict`, optional

argument path:

`simplify_mdata/model_devi/resources[SlurmJobArray]/kwargs`

Extra arguments.

custom_gpu_line:

type: `str | NoneType`, optional,
default: `None`

argument path:
`simplify_mdata/model_devi/resources[SlurmJobArray]/kwargs/custom_gpu_line`

Custom GPU configuration, starting with `#SBATCH`

slurm_job_size:

type: `int`, optional, default: 1

argument path:

`simplify_mdata/model_devi/resources[SlurmJobArray]/kwargs/slurm_job_size`

Number of tasks in a Slurm job

When `batch_type` is set to `LSF` (or its alias `lsf`):

kwargs:

type: dict
argument path: `simplify_mdata/`
`model_devi/resources[LSF]/kwargs`

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path: `simplify_mdata/`
`model_devi/resources[LSF]/`
`kwargs/gpu_usage`

Choosing if GPU is used in the calculation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path: `simplify_mdata/`
`model_devi/resources[LSF]/`
`kwargs/gpu_new_syntax`

For LFS >= 10.1.0.3, new option -gpu for #BSUB could be used. If False, and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path: `simplify_mdata/`
`model_devi/resources[LSF]/`
`kwargs/gpu_exclusive`

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `simplify_mdata/`
`model_devi/resources[LSF]/`
`kwargs/custom_gpu_line`

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to Shell (or its alias shell):

kwargs:

type: dict, optional
argument path: `simplify_mdata/`
`model_devi/resources[Shell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to PBS (or its alias pbs):

kwargs:

type: dict, optional
argument path: simplify_mdata/
model_devi/resources[PBS]/kwargs

This field is empty for this batch.

When `batch_type` is set to SGE (or its alias `sge`):

kwargs:

type: dict, optional
argument path: simplify_mdata/
model_devi/resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to Torque (or its alias `torque`):

kwargs:

type: dict, optional
argument path: simplify_mdata/
model_devi/resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path:
simplify_mdata/model_devi/user_forward_files

Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
argument path:
simplify_mdata/model_devi/user_backward_files

Files to be backwarded from the remote machine.

fp:

type: dict
argument path: simplify_mdata/fp

Parameters of command, machine, and resources for fp

command:

type: str
argument path: simplify_mdata/fp/command
Command of a program.

machine:

type: dict
argument path: simplify_mdata/fp/machine

batch_type:

type: str
argument path: simplify_mdata/fp/
machine/batch_type

The batch job system type. Option: SGE,
Slurm, Shell, Torque, PBS, Bohrium, OpenAPI,
Fugaku, SlurmJobArray, LSF, DistributedShell

local_root:

type: str | NoneType
argument path: simplify_mdata/fp/
machine/local_root

The dir where the tasks and relating files locate.
Typically the project dir.

remote_root:

type: str | NoneType, optional
argument path: simplify_mdata/fp/
machine/remote_root

The dir where the tasks are executed on the remote machine. Only needed when context is not lazy-local.

clean_asynchronously:

type: bool, optional, default: False
argument path: simplify_mdata/fp/
machine/clean_asynchronously

Clean the remote directory asynchronously after the job finishes.

Depending on the value of *context_type*, different sub args are accepted.

context_type:

type: str (flag key)
argument path: simplify_mdata/fp/
machine/context_type
possible choices: *LocalContext*,
LazyLocalContext, *BohriumContext*,
HDFSContext, *SSHContext*,
OpenAPIContext

The connection used to remote machine. Option: OpenAPIContext, SSHContext, HDFSContext, LazyLocalContext, BohriumContext, LocalContext

When `context_type` is set to `LocalContext` (or its aliases `localcontext`, `Local`, `local`):

remote_profile:

type: dict, optional
argument path: simplify_mdata/fp/
machine[LocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `LazyLocalContext` (or its aliases `lazylocalcontext`, `LazyLocal`, `lazylocal`):

remote_profile:

type: dict, optional
argument path: simplify_mdata/fp/
machine[LazyLocalContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `BohriumContext` (or its aliases `bohriumcontext`, `Bohrium`, `bohrium`, `DpCloudServerContext`, `dpcloudservercontext`, `DpCloudServer`, `dpcloudserver`, `LebesgueContext`, `lebesguecontext`, `Lebesgue`, `lebesgue`):

remote_profile:

type: dict
argument path: simplify_mdata/fp/
machine[BohriumContext]/
remote_profile

The information used to maintain the connection with remote machine.

email:

type: str, optional
argument path: simplify_mdata/
fp/machine[BohriumContext]/
remote_profile/email

Email

password:

type: str, optional
argument path: simplify_mdata/
fp/machine[BohriumContext]/
remote_profile/password

Password

program_id:

type: int, alias: `project_id`

argument path: `simplify_mdata/fp/machine[BohriumContext]/remote_profile/program_id`

Program ID

retry_count:

type: `NoneType | int`, optional,
default: 2

argument path: `simplify_mdata/fp/machine[BohriumContext]/remote_profile/retry_count`

The retry count when a job is terminated

ignore_exit_code:

type: `bool`, optional, default: `True`

argument path: `simplify_mdata/fp/machine[BohriumContext]/remote_profile/ignore_exit_code`

The job state will be marked as finished if the exit code is non-zero when set to True. Otherwise, the job state will be designated as terminated.

keep_backup:

type: `bool`, optional

argument path: `simplify_mdata/fp/machine[BohriumContext]/remote_profile/keep_backup`

keep download and upload zip

input_data:

type: `dict`

argument path: `simplify_mdata/fp/machine[BohriumContext]/remote_profile/input_data`

Configuration of job

When `context_type` is set to `HDFSContext` (or its aliases `hdfscontext`, `HDFS`, `hdfs`):

remote_profile:

type: `dict`, optional

argument path: `simplify_mdata/fp/machine[HDFSContext]/remote_profile`

The information used to maintain the connection with remote machine. This field is empty for this context.

When `context_type` is set to `SSHContext` (or its aliases `sshcontext`, `SSH`, `ssh`):

remote_profile:

type: `dict`
 argument path: `simplify_mdata/fp/machine[SSHContext]/remote_profile`

The information used to maintain the connection with remote machine.

hostname:

type: `str`
 argument path: `simplify_mdata/fp/machine[SSHContext]/remote_profile/hostname`

hostname or ip of ssh connection.

username:

type: `str`
 argument path: `simplify_mdata/fp/machine[SSHContext]/remote_profile/username`

username of target linux system

password:

type: `str`, optional
 argument path: `simplify_mdata/fp/machine[SSHContext]/remote_profile/password`

(deprecated) password of linux system. Please use `SSH keys` instead to improve security.

port:

type: `int`, optional, default: 22
 argument path: `simplify_mdata/fp/machine[SSHContext]/remote_profile/port`

ssh connection port.

key_filename:

type: `str` | `NoneType`, optional,
 default: `None`
 argument path: `simplify_mdata/fp/machine[SSHContext]/remote_profile/key_filename`

key filename used by ssh connection.
 If left `None`, find key in `~/.ssh` or use password for login

passphrase:

type: str | NoneType, optional,

default: None

argument path: simplify_mdata/
fp/machine[SSHContext]/
remote_profile/passphrase

passphrase of key used by ssh connection

timeout:

type: int, optional, default: 10

argument path: simplify_mdata/
fp/machine[SSHContext]/
remote_profile/timeout

timeout of ssh connection

totp_secret:

type: str | NoneType, optional,
default: None

argument path: simplify_mdata/
fp/machine[SSHContext]/
remote_profile/totp_secret

Time-based one time password secret. It should be a base32-encoded string extracted from the 2D code.

tar_compress:

type: bool, optional, default: True
argument path: simplify_mdata/
fp/machine[SSHContext]/
remote_profile/tar_compress

The archive will be compressed in upload and download if it is True. If not, compression will be skipped.

look_for_keys:

type: bool, optional, default: True
argument path: simplify_mdata/
fp/machine[SSHContext]/
remote_profile/look_for_keys

enable searching for discoverable private key files in ~/.ssh/

When `context_type` is set to `OpenAPIContext` (or its aliases `openapicontext`, `OpenAPI`, `openapi`):

remote_profile:

type: dict, optional

argument path: simplify_mdata/fp/
machine[OpenAPIContext]/
remote_profile

The information used to maintain the connection with remote machine. This field is empty for this context.

resources:

type: dict
argument path: simplify_mdata/fp/resources

number_node:

type: int, optional, default: 1
argument path: simplify_mdata/fp/resources/number_node

The number of node need for each *job*

cpu_per_node:

type: int, optional, default: 1
argument path: simplify_mdata/fp/resources/cpu_per_node

cpu numbers of each node assigned to each job.

gpu_per_node:

type: int, optional, default: 0
argument path: simplify_mdata/fp/resources/gpu_per_node

gpu numbers of each node assigned to each job.

queue_name:

type: str, optional, default: (empty string)
argument path: simplify_mdata/fp/resources/queue_name

The queue name of batch job scheduler system.

group_size:

type: int
argument path: simplify_mdata/fp/resources/group_size

The number of *tasks* in a *job*. 0 means infinity.

custom_flags:

type: typing.List[str], optional
argument path: simplify_mdata/fp/resources/custom_flags

The extra lines pass to job submitting script header

strategy:

type: dict, optional

argument path: `simplify_mdata/fp/resources/strategy`

strategies we use to generation job submitting scripts.

if_cuda_multi_devices:

type: bool, optional, default: False
argument path: `simplify_mdata/fp/resources/strategy/if_cuda_multi_devices`

If there are multiple nvidia GPUS on the node, and we want to assign the tasks to different GPUS.If true, dpdispatcher will manually export environment variable CUDA_VISIBLE_DEVICES to different task.Usually, this option will be used with Task.task_need_resources variable simultaneously.

ratio_unfinished:

type: float, optional, default: 0.0
argument path: `simplify_mdata/fp/resources/strategy/ratio_unfinished`

The ratio of *tasks* that can be unfinished.

customized_script_header_template_file:

type: str, optional
argument path: `simplify_mdata/fp/resources/strategy/customized_script_header_template_file`

The customized template file to generate job submitting script header, which overrides the default file.

para_deg:

type: int, optional, default: 1
argument path: `simplify_mdata/fp/resources/para_deg`

Decide how many tasks will be run in parallel.

source_list:

type: `typing.List[str]`, optional, default: []
argument path: `simplify_mdata/fp/resources/source_list`

The env file to be sourced before the command execution.

```
module_purge:  
    type: bool, optional, default: False  
    argument path: simplify_mdata/fp/  
    resources/module_purge  
    Remove all modules on HPC system before  
    module load (module_list)  
  
module_unload_list:  
    type: typing.List[str], optional, default:  
    []  
    argument path: simplify_mdata/fp/  
    resources/module_unload_list  
    The modules to be unloaded on HPC system  
    before submitting jobs  
  
module_list:  
    type: typing.List[str], optional, default:  
    []  
    argument path: simplify_mdata/fp/  
    resources/module_list  
    The modules to be loaded on HPC system be-  
    fore submitting jobs  
  
envs:  
    type: dict, optional, default: {}  
    argument path:  
    simplify_mdata/fp/resources/envs  
    The environment variables to be exported on  
    before submitting jobs  
  
prepend_script:  
    type: typing.List[str], optional, default:  
    []  
    argument path: simplify_mdata/fp/  
    resources/prepend_script  
    Optional script run before jobs submitted.  
  
append_script:  
    type: typing.List[str], optional, default:  
    []  
    argument path: simplify_mdata/fp/  
    resources/append_script  
    Optional script run after jobs submitted.  
  
wait_time:  
    type: float | int, optional, default: 0
```

argument path: `simplify_mdata/fp/resources/wait_time`

The waitting time in second after a single *task* submitted

Depending on the value of `batch_type`, different sub args are accepted.

batch_type:

type: `str` (flag key)

argument path: `simplify_mdata/fp/resources/batch_type`

possible choices: `OpenAPI`,
`DistributedShell`, `Bohrium`, `Fugaku`,
`Slurm`, `SlurmJobArray`, `LSF`, `Shell`, `PBS`,
`SGE`, `Torque`

The batch job system type loaded from machine/`batch_type`.

When `batch_type` is set to `OpenAPI` (or its alias `openapi`):

kwargs:

type: `dict`, optional

argument path: `simplify_mdata/fp/resources[OpenAPI]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `DistributedShell` (or its alias `distributedshell`):

kwargs:

type: `dict`, optional

argument path: `simplify_mdata/fp/resources[DistributedShell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Bohrium` (or its aliases `bohrium`, `Lebesgue`, `lebesgue`, `DpCloudServer`, `dpcloudserver`):

kwargs:

type: `dict`, optional

argument path: `simplify_mdata/fp/resources[Bohrium]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Fugaku` (or its alias `fugaku`):

kwargs:

type: `dict`, optional

argument path: `simplify_mdata/fp/resources[Fugaku]/kwargs`

This field is empty for this batch.

When `batch_type` is set to `Slurm` (or its alias `slurm`):

kwargs:

type: dict, optional
argument path: `simplify_mdata/fp/resources[Slurm]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `simplify_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

When `batch_type` is set to `SlurmJobArray` (or its alias `slurmjobarray`):

kwargs:

type: dict, optional
argument path: `simplify_mdata/fp/resources[SlurmJobArray]/kwargs`

Extra arguments.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `simplify_mdata/fp/resources[SlurmJobArray]/kwargs/custom_gpu_line`

Custom GPU configuration, starting
with #SBATCH

slurm_job_size:

type: int, optional, default: 1
argument path: `simplify_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size`

Number of tasks in a Slurm job

When `batch_type` is set to `LSF` (or its alias `lsf`):

kwargs:

type: dict
argument path: `simplify_mdata/fp/resources[LSF]/kwargs`

Extra arguments.

gpu_usage:

type: bool, optional, default: False
argument path: `simplify_mdata/`
`fp/resources[LSF]/kwargs/`
`gpu_usage`

Choosing if GPU is used in the calculation step.

gpu_new_syntax:

type: bool, optional, default: False
argument path: `simplify_mdata/`
`fp/resources[LSF]/kwargs/`
`gpu_new_syntax`

For LFS >= 10.1.0.3, new option -gpu for #BSUB could be used. If False, and old syntax would be used.

gpu_exclusive:

type: bool, optional, default: True
argument path: `simplify_mdata/`
`fp/resources[LSF]/kwargs/`
`gpu_exclusive`

Only take effect when new syntax enabled. Control whether submit tasks in exclusive way for GPU.

custom_gpu_line:

type: str | NoneType, optional,
default: None
argument path: `simplify_mdata/`
`fp/resources[LSF]/kwargs/`
`custom_gpu_line`

Custom GPU configuration, starting with #BSUB

When `batch_type` is set to Shell (or its alias shell):

kwargs:

type: dict, optional
argument path: `simplify_mdata/`
`fp/resources[Shell]/kwargs`

This field is empty for this batch.

When `batch_type` is set to PBS (or its alias pbs):

kwargs:

type: dict, optional
argument path: `simplify_mdata/`
`fp/resources[PBS]/kwargs`

This field is empty for this batch.

When `batch_type` is set to SGE (or its alias sge):

kwargs:

type: dict, optional
argument path: simplify_mdata/fp/resources[SGE]/kwargs

This field is empty for this batch.

When `batch_type` is set to Torque (or its alias `torque`):

kwargs:

type: dict, optional
argument path: simplify_mdata/fp/resources[Torque]/kwargs

This field is empty for this batch.

user_forward_files:

type: list, optional
argument path:
simplify_mdata/fp/user_forward_files

Files to be forwarded to the remote machine.

user_backward_files:

type: list, optional
argument path:
simplify_mdata/fp/user_backward_files

Files to be backwarded from the remote machine.

AUTO TEST

7.1 Autotest Overview: Autotest for Deep Generator

Suppose that we have a potential (can be DFT, DP, MEAM ...), autotest helps us automatically calculate M properties on N configurations. The folder where the autotest runs is called the working directory of autotest. Different potentials should be tested in different working directories.

A property is tested in three steps: `make`, `run` and `post`. `make` prepares all computational tasks that are needed to calculate the property. For example to calculate EOS, `make` prepares a series of tasks, each of which has a scaled configuration with certain volume, and all necessary input files necessary for starting a VASP, ABACUS, or LAMMPS calculations. `run` sends all the computational tasks to remote computational resources defined in a machine configuration file like `machine.json`, and automatically collects the results when remote calculations finish. `post` calculates the desired property from the collected results.

7.1.1 Relaxation

The relaxation of a structure should be carried out before calculating all other properties:

```
dpigen autotest make relax.json
dpigen autotest run relax.json machine.json
dpigen autotest post relax.json
```

If, for some reasons, the main program terminated at stage `run`, one can easily restart with the same command. `relax.json` is the parameter file. An example for `deepmd` relaxation is given as:

```
{
    "structures": ["confs/mp-*"],
    "interaction": {
        "type": "deepmd",
        "model": "frozen_model.pb",
        "type_map": {"Al": 0, "Mg": 1}
    },
    "relaxation": {}
}
```

where the key `structures` provides the structures to relax. `interaction` is provided with `deepmd`, and other options are `vasp`, `abacus`, `meam`...

7.1.2 Task type

There are now six task types implemented in the package: `vasp`, `abacus`, `deepmd`, `meam`, `eam_fs`, and `eam_alloy`. An `inter.json` file in json format containing the interaction parameters will be written in the directory of each task after make. We give input examples of the `interaction` part for each type below:

VASP:

The default of `potcar_prefix` is "".

```
"interaction": {
    "type": "vasp",
    "incar": "vasp_input/INCAR",
    "potcar_prefix": "vasp_input",
    "potcars": {"Al": "POTCAR.al", "Mg": "POTCAR.mg"}
}
```

ABACUS:

The default of `potcar_prefix` is "". The path of `potcars/orb_files/deepks_desc` is `potcar_prefix + potcars/orb_files/deepks_desc/deepks_model`.

```
"interaction": {
    "type": "abacus",
    "incar": "abacus_input/INPUT",
    "potcar_prefix": "abacus_input",
    "potcars": {"Al": "pseudo_potential.al", "Mg": "pseudo_potential.
    mg"},

    "orb_files": {"Al": "numerical_orb.al", "Mg": "numerical_orb.mg"},
    "atom_masses": {"Al": 26.9815, "Mg": 24.305},
    "deepks_desc": "jle.orb",
    "deepks_model": "model.ptg"
}
```

deepmd:

Only 1 model can be used in autotest in one working directory.

```
"interaction": {
    "type": "deepmd",
    "model": "frozen_model.pb",
    "type_map": {"Al": 0, "Mg": 1}
}
```

meam:

Please make sure the `USER-MEAMC` package has already been installed in LAMMPS.

```
"interaction": {
    "type": "meam",
    "model": ["meam.lib", "AlMg.meam"],
    "type_map": {"Al": 1, "Mg": 2}
}
```

eam_fs & eam_alloy:

Please make sure the `MANYBODY` package has already been installed in LAMMPS

```

"interaction": {
    "type": "eam_fs (eam_alloy)",
    "model": "AlMg.eam.fs (AlMg.eam.alloy)",
    "type_map": {"Al": 1, "Mg": 2}
}

```

7.1.3 Property type

Now the supported property types are eos, elastic, vacancy, interstitial, surface, and gamma. Before property tests, relaxation should be done first or the relaxation results should be present in the corresponding directory `confs/mp-*/relaxation/relax_task`. A file named `task.json` in json format containing the property parameter will be written in the directory of each task after `make` step. Multiple property tests can be performed simultaneously.

7.2 Make run and post

There are three operations in auto test package, namely `make`, `run`, and `post`. Here we take eos property as an example for property type.

7.2.1 Make

The INCAR, POSCAR, POTCAR input files for VASP or `in.lammps`, `conf.lmp`, and the interatomic potential files for LAMMPS will be generated in the directory `confs/mp-*/relaxation/relax_task` for relaxation or `confs/mp-*/eos_00/task.[0-9]*[0-9]` for EOS. The `machine.json` file is not needed for `make`. Example:

```
dpgen autotest make relaxation.json
```

7.2.2 Run

The jobs would be dispatched according to the parameter in `machine.json` file and the calculation results would be sent back. Example:

```
dpgen autotest run relaxation.json machine.json
```

7.2.3 Post

The post process of calculation results would be performed. `result.json` in json format will be generated in `confs/mp-*/relaxation/relax_task` for relaxation and `result.json` in json format and `result.out` in txt format in `confs/mp-*/eos_00` for EOS. The `machine.json` file is also not needed for `post`. Example:

```
dpgen autotest post relaxation.json
```

7.3 Relaxation

7.3.1 Relaxation get started and input examples

The relaxation of a structure should be carried out before calculating all other properties.

First, we need input parameter file and we name it `relax.json` here. All the relaxation calculations should be taken either by VASP, ABACUS, or LAMMPS. Here are two input examples for VASP and LAMMPS respectively.

An example of the input file for relaxation by VASP:

```
{  
    "structures": ["confs/std-*"],  
    "interaction": {  
        "type": "vasp",  
        "incar": "vasp_input/INCAR",  
        "potcar_prefix": "vasp_input",  
        "potcars": {"Al": "POTCAR.al"}  
    },  
    "relaxation": {  
        "cal_type": "relaxation",  
        "cal_setting": {"relax_pos": true,  
                      "relax_shape": true,  
                      "relax_vol": true,  
                      "ediff": 1e-6,  
                      "ediffg": -0.01,  
                      "encut": 650,  
                      "kspacing": 0.1,  
                      "kgamma": false}  
    }  
}
```

Key words	data structure	example	description
structures	List of String	["confs/std-*"]	path of different structures
interaction	Dict	See above	description of the task type and atomic interaction
type	String	"vasp"	task type
incar	String	"vasp_input/INCAR"	path for INCAR file in vasp
pot-car_prefix	String	"vasp_input"	prefix of path for POTCAR file in vasp, default = ""
potcars	Dict	{"Al": "POTCAR.al"}	key is element type and value is potcar name
relaxation	Dict	See above	calculation type and setting for relaxation
cal_type	String	"relaxation" or "static"	calculation type
cal_setting	Dict	See above	calculation setting
relax_pos	Boolean	true	relax atomic position or not, default = true for relaxation
relax_shape	Boolean	true	relax box shape or not, default = true for relaxation
relax_vol	Boolean	true	relax box volume or not, default = true for relaxation
ediff	Float	1e-6	set EDIFF parameter in INCAR files
ediffg	Float	-0.01	set EDIFFG parameter in INCAR files
encut	Int	650	set encut parameter in INCAR files
kspacing	Float	0.1	set KSPACING parameter in INCAR files
kgamma	Boolean	false	set KGAMMA parameter in INCAR files

An example of the input file for relaxation by LAMMPS:

```
{
  "structures": ["confs/std-*"],
  "interaction": {
    "type": "deepmd",
    "model": "frozen_model.pb",
    "in_lammps": "lammps_input/in.lammps",
    "type_map": {"Al": 0}
  },
  "relaxation": {
    "cal_setting": {"etol": 0,
                  "ftol": 1e-10,
                  "maxiter": 5000,
                  "maximal": 500000}
  }
}
```

Other key words different from vasp:

Key words	data structure	example	description
model	String or List of String	“frozen_model.pb”	model file for atomic interaction
in_lammps	String	“lammps_input/in.lan	input file for lammps commands
type_map	Dict	{“Al”: 0}	key is element type and value is type number. DP starts from 0, others starts from 1
etol	Float	0	stopping tolerance for energy
ftol	Float	1e-10	stopping tolerance for force
maxiter	Int	5000	max iterations of minimizer
maxeval	Int	500000	max number of force/energy evaluations

For LAMMPS relaxation and all the property calculations, **package will help to generate `in.lammps` file for user automatically** according to the property type. We can also make the final changes in the `minimize` setting (`minimize etol ftol maxiter maxeval`) in `in.lammps`. In addition, users can apply the input file for lammps commands in the `interaction` part. For further information of the LAMMPS relaxation, we refer users to [minimize command](#).

7.3.2 Relaxation make

The list of the directories storing structures are `["confs/std-*"]` in the previous example. For single element system, if POSCAR doesn't exist in the directories: `std-fcc`, `std-hcp`, `std-dhcp`, `std-bcc`, `std-diamond`, and `std-sc`, the package will automatically generate the standard crystal structures `fcc`, `hcp`, `dhcp`, `bcc`, `diamond`, and `sc` in the corresponding directories, respectively. In other conditions and for multi-component system (more than 1), if POSCAR doesn't exist, the package will terminate and print the error “**no configuration for autotest**”.

VASP relaxation

Take the input example of Al in the previous section, when we do `make` as follows:

```
dpigen autotest make relaxation.json
```

the following files would be generated:

```
tree confs/std-fcc/relaxation/
```

```
confs/std-fcc/relaxation/
|--- INCAR
|--- POTCAR
|--- relax_task
|   |--- INCAR -> ../INCAR
|   |--- inter.json
|   |--- KPOINTS
|   |--- POSCAR -> ../../POSCAR
|   |--- POTCAR -> ../../POTCAR
|--- task.json
```

`inter.json` records the information in the `interaction` dictionary and `task.json` records the information in the `relaxation` dictionary.

LAMMPS relaxation

```
dpgen autotest make relaxation.json
tree confs/std-fcc/
```

the output would be:

```
confs/std-fcc/
| -- POSCAR
| -- relaxation
|   | -- frozen_model.pb -> ../../../../frozen_model.pb
|   | -- in.lammps
|   | -- relax_task
|   |   | -- conf.lmp
|   |   | -- frozen_model.pb -> ./frozen_model.pb
|   |   | -- in.lammps -> ../in.lammps
|   |   | -- inter.json
|   |   | -- POSCAR -> ../../POSCAR
|   | -- task.json
```

the `conf.lmp` is the input configuration and `in.lammps` is the input command file for lammps.

in.lammps: the package would generate the file `confs/mp-*/relaxation/in.lammps` as follows and we refer the user to the further information of `fix box/relax` function in lammps:

```
clear
units          metal
dimension      3
boundary       p p p
atom_style    atomic
box           tilt large
read_data     conf.lmp
mass          1 26.982
neigh_modify  every 1 delay 0 check no
pair_style    deepmd frozen_model.pb
pair_coeff
compute       mype all pe
thermo        100
thermo_style  custom step pe pxx pyy pzz pxy pxz pyz lx ly lz vol c_mype
dump          1 all custom 100 dump.relax id type xs ys zs fx fy fz
min_style     cg
fix           1 all box/relax iso 0.0
minimize      0 1.000000e-10 5000 500000
fix           1 all box/relax aniso 0.0
minimize      0 1.000000e-10 5000 500000
variable      N equal count(all)
variable      V equal vol
variable      E equal "c_mype"
variable      tmplx equal lx
variable      tmplly equal ly
variable      Pxx equal pxx
variable      Pyy equal pyy
variable      Pzz equal pzz
variable      Pxy equal pxy
```

(continues on next page)

(continued from previous page)

```

variable      Pxz equal pxz
variable      Pyz equal pyz
variable      Epa equal ${E}/${N}
variable      Vpa equal ${V}/${N}
variable      AA equal (${tmp1x}*${tmp1y})
print "All done"
print "Total number of atoms = ${N}"
print "Final energy per atoms = ${Epa}"
print "Final volume per atoms = ${Vpa}"
print "Final Base area = ${AA}"
print "Final Stress (xx yy zz xy xz yz) = ${Pxx} ${Pyx} ${Pzz} ${Pxz} ${Pyz}"

```

If user provides lammps input command file `in.lammps`, the `thermo_style` and `dump` commands should be the same as the above file.

interatomic potential model: the `frozen_model.pb` in `confs/mp-*/relaxation` would link to the `frozen_model.pb` file given in the input.

7.3.3 Relaxation run

The work path of each task should be in the form like `confs/mp-*/relaxation` and all task is in the form like `confs/mp-*/relaxation/relax_task`.

The `machine.json` file should be applied in this process and the machine parameters (eg. GPU or CPU) are determined according to the task type (VASP or LAMMPS). Then in each work path, the corresponding tasks would be submitted and the results would be sent back through `make_dispatcher`.

Take deepmd run for example:

```
nohup dpigen autotest run relaxation.json machine-ali.json > run.result 2>&1 &
tree confs/std-fcc/relaxation/
```

the output would be:

```

confs/std-fcc/relaxation/
|-- frozen_model.pb -> ../../../../../frozen_model.pb
|-- in.lammps
|-- jr.json
|-- relax_task
|   |-- conf.lmp
|   |-- dump.relax
|   |-- frozen_model.pb -> ./frozen_model.pb
|   |-- in.lammps -> ../in.lammps
|   |-- inter.json
|   |-- log.lammps
|   |-- outlog
|   |-- POSCAR -> ../../POSCAR
|-- task.json

```

`dump.relax` is the file storing configurations and `log.lammps` is the output file for lammps.

7.3.4 Relaxation post

Take deepmd post for example:

```
dpgen autotest post relaxation.json
tree confs/std-fcc/relaxation/
```

the output will be:

```
confs/std-fcc/relaxation/
|-- frozen_model.pb -> ../../../../../frozen_model.pb
|-- in.lammps
|-- jr.json
|-- relax_task
|--- conf.lmp
|--- CONTCAR
|--- dump.relax
|--- frozen_model.pb -> ./frozen_model.pb
|--- in.lammps -> ./in.lammps
|--- inter.json
|--- log.lammps
|--- outlog
|--- POSCAR -> ../../../../POSCAR
|--- result.json
|-- task.json
```

`result.json` stores the box cell, coordinates, energy, force, virial,... information of each frame in the relaxation trajectory and `CONTCAR` is the final equilibrium configuration.

`result.json`:

```
{
  "@module": "dpdata.system",
  "@class": "LabeledSystem",
  "data": {
    "atom_nums": [
      1
    ],
    "atom_names": [
      "Al"
    ],
    "atom_types": {
      "@module": "numpy",
      "@class": "array",
      "dtype": "int64",
      "data": [
        0
      ]
    },
    "orig": {
      "@module": "numpy",
      "@class": "array",
      "dtype": "int64",
      "data": [
        0
      ]
    }
  }
}
```

(continues on next page)

(continued from previous page)

```
    0,
    0,
    0
]
},
"cells": {
    "@module": "numpy",
    "@class": "array",
    "dtype": "float64",
    "data": [
        [
            [
                [
                    2.8637824638,
                    0.0,
                    0.0
                ],
                [
                    1.4318912319,
                    2.4801083646,
                    0.0
                ],
                [
                    1.4318912319,
                    0.8267027882,
                    2.3382685902
                ]
            ],
            [
                [
                    2.8549207998018438,
                    0.0,
                    0.0
                ],
                [
                    1.4274603999009239,
                    2.472433938457684,
                    0.0
                ],
                [
                    1.4274603999009212,
                    0.8241446461525599,
                    2.331033071844216
                ]
            ],
            [
                [
                    2.854920788303194,
                    0.0,
                    0.0
                ],
                [
                    1.427460394144466,

```

(continues on next page)

(continued from previous page)

```

        2.472433928487206,
        0.0
    ],
    [
        1.427460394154763,
        0.8241446428350139,
        2.331033062460779
    ]
]
},
"coords": {
    "@module": "numpy",
    "@class": "array",
    "dtype": "float64",
    "data": [
        [
            [
                [
                    0.0,
                    0.0,
                    0.0
                ]
            ],
            [
                [
                    5.709841595683707e-25,
                    -4.3367974740910857e-19,
                    0.0
                ]
            ],
            [
                [
                    -8.673606219968035e-19,
                    8.673619637565944e-19,
                    8.673610853102186e-19
                ]
            ]
        ]
    ],
    "energies": {
        "@module": "numpy",
        "@class": "array",
        "dtype": "float64",
        "data": [
            -3.745029,
            -3.7453815,
            -3.7453815
        ]
    },
    "forces": {
        "@module": "numpy",
        "@class": "array",

```

(continues on next page)

(continued from previous page)

```

    "dtype": "float64",
    "data": [
        [
            [
                [
                    [
                        [
                            [
                                [
                                    [
                                        [
                                            [
                                                [
                                                    [
                                                        [
                                                            [
                                                                [
                                                                    [
                                                                        [
                                                                            [
                                                                                [
                                                                                    [
                                                                                        [
                                                                                            [
                                                                                                [
                                                                                                 [
                                                                                                 [
                                                                                                 [
                                                                                                 [
                                                                                                 [
                                                                                                 [
................................................................

```

(continues on next page)

(continued from previous page)

```

        ],
        [
            -3.396452753975288e-15,
            -9.991375413666671e-08,
            5.4790751628409565e-12
        ],
        [
            8.785831629151552e-16,
            5.4790751628409565e-12,
            -9.973497959053003e-08
        ]
    ],
    [
        [
            1.506940521266962e-11,
            1.1152016233536118e-11,
            -8.231900529157644e-12
        ],
        [
            1.1152016233536118e-11,
            -6.517665029355618e-11,
            -6.33706710415926e-12
        ],
        [
            -8.231900529157644e-12,
            -6.33706710415926e-12,
            5.0011471096530724e-11
        ]
    ],
    [
        [
            -7.2692250000000005,
            1.1727839e-15,
            1.3414452e-15
        ],
        [
            1.1727839e-15,
            -7.2692250000000005,
            4.4529093000000003e-10
        ],
        [
            1.3414452e-15,
            4.4529093000000003e-10,
            -7.2692250000000005
        ]
    ]
},
"stress": {
    "@module": "numpy",
    "@class": "array",
    "dtype": "float64",
    "data": [
        [
            [
                -7.2692250000000005,
                1.1727839e-15,
                1.3414452e-15
            ],
            [
                1.1727839e-15,
                -7.2692250000000005,
                4.4529093000000003e-10
            ],
            [
                1.3414452e-15,
                4.4529093000000003e-10,
                -7.2692250000000005
            ]
        ]
    ]
}

```

(continues on next page)

(continued from previous page)

```

        ],
        [
            [
                -9.71695e-06,
                -3.3072633e-13,
                8.5551193e-14
            ],
            [
                -3.3072633e-13,
                -9.729006000000001e-06,
                5.3351969e-10
            ],
            [
                8.5551193e-14,
                5.3351969e-10,
                -9.711598e-06
            ]
        ],
        [
            [
                1.4673689e-09,
                1.0859169e-09,
                -8.0157343e-10
            ],
            [
                1.0859169e-09,
                -6.3465139e-09,
                -6.1706584e-10
            ],
            [
                -8.0157343e-10,
                -6.1706584e-10,
                4.8698191e-09
            ]
        ],
    }
}
}

```

7.4 Property

7.4.1 Property get started and input examples

Here we take deepmd for example and the input file for other task types is similar.

```
{
    "structures":      ["confs/std-*"],
    "interaction": {
        "type":         "deepmd",

```

(continues on next page)

(continued from previous page)

```

    "model":      "frozen_model.pb",
    "type_map":   {"Al": 0}
},
"properties": [
{
  "type":        "eos",
  "vol_start":  0.9,
  "vol_end":    1.1,
  "vol_step":   0.01
},
{
  "type":        "elastic",
  "norm_deform": 1e-2,
  "shear_deform": 1e-2
},
{
  "type":        "vacancy",
  "supercell": [3, 3, 3],
  "start_confs_path": "../vasp/confs"
},
{
  "type":        "interstitial",
  "supercell": [3, 3, 3],
  "insert_ele": ["Al"],
  "conf_filters": {"min_dist": 1.5},
  "cal_setting": {"input_prop": "lammmps_input/lammmps_high"}
},
{
  "type":        "surface",
  "min_slab_size": 10,
  "min_vacuum_size": 11,
  "max_miller": 2,
  "cal_type": "static"
},
{
  "type": "gamma",
  "lattice_type": "fcc",
  "miller_index": [1, 1, 1],
  "displace_direction": [1, 1, 0],
  "supercell_size": [1, 1, 10],
  "min_vacuum_size": 10,
  "add_fix": ["true", "true", "false"],
  "n_steps": 20
}
]
}

```

Universal key words for properties

Key words	data structure	example	description
type	String	“eos”	property type
skip	Boolean	true	whether to skip current property or not
start_confs_path	String	“..vasp/confs”	start from the equilibrium configuration in other path only for the current property type
cal_setting[“input_prop”]	String	“lammps_input/lamr”	input commands file
cal_setting[“overwrite_i”]	Dict		overwrite the interaction in the interaction part only for the current property type

other parameters in **cal_setting** and **cal_type** in **relaxation** also apply in **property**.

Key words for EOS

Key words	data structure	example	description
vol_start	Float	0.9	the starting volume related to the equilibrium structure
vol_end	Float	1.1	the biggest volume related to the equilibrium structure
vol_step	Float	0.01	the volume increment related to the equilibrium structure
vol_abs	Boolean	false	whether to treat vol_start, vol_end and vol_step as absolute volume or not (as relative volume), default = false

Key words for Elastic

Key words	data structure	example	description
norm_deform	Float	1e-2	deformation in xx, yy, zz, default = 1e-2
shear_deform	Float	1e-2	deformation in other directions, default = 1e-2

Key words for Vacancy

Key words	data structure	example	description
supercell	List of Int	[3,3,3]	the supercell to be constructed, default = [1,1,1]

Key words for Interstitial

Key words	data structure	example	description
in- sert_ele	List of String	["Al"]	the element to be inserted
supercell	List of Int	[3,3,3]	the supercell to be constructed, default = [1,1,1]
conf_filters	Dict	“min_dist”: 1.5	filter out the undesirable configuration
bcc_self	Boolean	false	whether to do the self-interstitial calculations for bcc structures, default = false

Key words for Surface

Key words	data structure	example	description
min_slab_size	Int	10	minimum size of slab thickness
min_vacuum_size	Int	11	minimum size of vacuum width
pert_xz	Float	0.01	perturbation through xz direction used to compute surface energy, default = 0.01
max_miller	Int	2	the maximum miller index, default = 2

Key words for Gamma

Key words	data structure	example	description
lattice_type	String	“fcc”	“bcc” or “fcc” at this stage
miller_index	List of Int	[1,1,1]	slip plane for gamma-line calculation
dis-	List of Int	[1,1,0]	slip direction for gamma-line calculation
place_direction			
supercell_size	List of Int	[1,1,10]	the supercell to be constructed, default = [1,1,5]
min_vacuum_si	Int or Float	10	minimum size of vacuum width, default = 20
add_fix	List of String	['true','true','false']	whether to fix atoms in the direction, default = ['true','true','false'] (standard method)
n_steps	Int	20	Number of points for gamma-line calculation, default = 10

7.4.2 Property make

```
dpgen autotest make property.json
```

EOS output:

```
confs/std-fcc/eos_00/
|-- frozen_model.pb -> ../../../../frozen_model.pb
|-- task.000000
|   |-- conf.lmp
|   |-- eos.json
|   |-- frozen_model.pb -> ../frozen_model.pb
|   |-- in.lammps
|   |-- inter.json
|   |-- POSCAR
|   |-- POSCAR.orig -> ../../relaxation/relax_task/CONTCAR
|   |-- task.json
|-- task.000001
|   |-- conf.lmp
|   |-- eos.json
|   |-- frozen_model.pb -> ../frozen_model.pb
|   |-- in.lammps
|   |-- inter.json
|   |-- POSCAR
|   |-- POSCAR.orig -> ../../relaxation/relax_task/CONTCAR
```

(continues on next page)

(continued from previous page)

```

|   |-- task.json
...
|-- task.000019
|   |-- conf.lmp
|   |-- eos.json
|   |-- frozen_model.pb -> ../../frozen_model.pb
|   |-- in.lammps
|   |-- inter.json
|   |-- POSCAR
|   |-- POSCAR.orig -> ../../../../relaxation/relax_task/CONTCAR
|-- task.json

```

`eos.json` records the volume and scale of the corresponding task.

Elastic output:

```

confs/std-fcc/elastic_00/
|-- equi.stress.json
|-- frozen_model.pb -> ../../../../../../frozen_model.pb
|-- in.lammps
|-- POSCAR -> ../../relaxation/relax_task/CONTCAR
|-- task.000000
|   |-- conf.lmp
|   |-- frozen_model.pb -> ../../frozen_model.pb
|   |-- in.lammps -> ../../in.lammps
|   |-- inter.json
|   |-- POSCAR
|   |-- strain.json
|   |-- task.json
|-- task.000001
|   |-- conf.lmp
|   |-- frozen_model.pb -> ../../frozen_model.pb
|   |-- in.lammps -> ../../in.lammps
|   |-- inter.json
|   |-- POSCAR
|   |-- strain.json
|   |-- task.json
...
|-- task.000023
|   |-- conf.lmp
|   |-- frozen_model.pb -> ../../frozen_model.pb
|   |-- in.lammps -> ../../in.lammps
|   |-- inter.json
|   |-- POSCAR
|   |-- strain.json
|   |-- task.json

```

`equi.stress.json` records the stress information of the equilibrium task and `strain.json` records the deformation information of the corresponding task.

Vacancy output:

```
confs/std-fcc/vacancy_00/
```

(continues on next page)

(continued from previous page)

```

|--- frozen_model.pb -> ../../../../../frozen_model.pb
|--- in.lammps
|--- POSCAR -> ../relaxation/relax_task/CONTCAR
└-- task.000000
    |--- conf.lmp
    |--- frozen_model.pb -> ../frozen_model.pb
    |--- in.lammps -> ../in.lammps
    |--- inter.json
    |--- POSCAR
    |--- supercell.json
    └-- task.json

```

`supercell.json` records the supercell size information of the corresponding task.

Interstitial output:

```

conf/std-fcc/interstitial_00/
|-- element.out
|--- frozen_model.pb -> ../../../../../frozen_model.pb
|--- in.lammps
|--- POSCAR -> ../relaxation/relax_task/CONTCAR
|--- task.000000
|    |--- conf.lmp
|    |--- frozen_model.pb -> ../frozen_model.pb
|    |--- in.lammps -> ../in.lammps
|    |--- inter.json
|    |--- POSCAR
|    |--- supercell.json
|    └-- task.json
└-- task.000001
    |--- conf.lmp
    |--- frozen_model.pb -> ../frozen_model.pb
    |--- in.lammps -> ../in.lammps
    |--- inter.json
    |--- POSCAR
    |--- supercell.json
    └-- task.json

```

`element.out` records the inserted element type of each task and `supercell.json` records the supercell size information of the corresponding task.

Surface output:

```

conf/std-fcc/surface_00/
|-- frozen_model.pb -> ../../../../../frozen_model.pb
|--- in.lammps
|--- POSCAR -> ../relaxation/relax_task/CONTCAR
|--- task.000000
|    |--- conf.lmp
|    |--- frozen_model.pb -> ../frozen_model.pb
|    |--- in.lammps -> ../in.lammps
|    |--- inter.json
|    |--- miller.json

```

(continues on next page)

(continued from previous page)

```

|   | -- POSCAR
|   | -- POSCAR.tmp
|   | |-- task.json
||-- task.000001
|   | -- conf.lmp
|   | -- frozen_model.pb -> ../frozen_model.pb
|   | -- in.lammps -> ../in.lammps
|   | -- inter.json
|   | -- miller.json
|   | -- POSCAR
|   | -- POSCAR.tmp
|   | |-- task.json
...
|-- task.000008
|   | -- conf.lmp
|   | -- frozen_model.pb -> ../frozen_model.pb
|   | -- in.lammps -> ../in.lammps
|   | -- inter.json
|   | -- miller.json
|   | -- POSCAR
|   | -- POSCAR.tmp
|   | |-- task.json

```

`miller.json` records the miller index of the corresponding task.

7.4.3 Property run

```
nohup dpigen autotest run property.json machine-ali.json > run.result 2>&1 &
```

the result file `log.lammps`, `dump.relax`, and `outlog` would be sent back.

7.4.4 Property-post

Use command

```
dpigen autotest post property.json
```

to post results as `result.json` and `result.out` in each property's path.

7.4.5 Properties

EOS get started and input examples

Equation of State (EOS) here calculates the energies of the most stable structures as a function of volume. Users can refer to Figure 4 of the [dpigen CPC paper](#) for more information of EOS.

An example of the input file for EOS by VASP:

```
{
    "structures":      ["confs/mp-*", "confs/std-*", "confs/test-*"],
    "interaction": {
        "type":           "vasp",
        "incar":          "vasp_input/INCAR",
        "potcar_prefix": "vasp_input",
        "potcars":        {"Al": "POTCAR.al", "Mg": "POTCAR.mg"}
    },
    "properties": [
    {
        "type":         "eos",
        "vol_start":   0.9,
        "vol_end":     1.1,
        "vol_step":    0.01
    }
]
}
```

`vol_start` is the starting volume relative to the equilibrium structure, `vol_step` is the volume increment step relative to the equilibrium structure, and the biggest relative volume is smaller than `vol_end`.

EOS make

Step 1. Before make in EOS, the equilibrium configuration CONTCAR must be present in `confs/mp-*/relaxation`.

Step 2. For the input example in the previous section, when we do make, 40 tasks would be generated as `confs/mp-*/eos_00/task.000000`, `confs/mp-*/eos_00/task.000001`, ..., `confs/mp-*/eos_00/task.000039`. The suffix `00` is used for possible refine later.

Step 3. If the task directory, for example `confs/mp-*/eos_00/task.000000` is not empty, the old input files in it including INCAR, POSCAR, POTCAR, conf.lmp, in.lammps would be deleted.

Step 4. In each task directory, POSCAR.orig would link to `confs/mp-*/relaxation/CONTCAR`. Then the scale parameter can be calculated as:

```
scale = (vol_current / vol_equi) ** (1. / 3.)
```

`vol_current` is the corresponding volume per atom of the current task and `vol_equi` is the volume per atom of the equilibrium configuration. Then the poscar_scale function in `dpgen.auto_test.lib.vasp` module would help to generate POSCAR file with `vol_current` in `confs/mp-*/eos_00/task.[0-9]*[0-9]`.

Step 5. According to the task type, the input file including INCAR, POTCAR or conf.lmp, in.lammps would be written in every `confs/mp-*/eos_00/task.[0-9]*[0-9]`.

EOS run

The work path of each task should be in the form like `confs/mp-*/eos_00` and all task is in the form like `confs/mp-*/eos_00/task.[0-9]*[0-9]`.

When we dispatch tasks, we would go through every individual work path in the list `confs/mp-*/eos_00`, and then submit `task.[0-9]*[0-9]` in each work path.

EOS post

The post processing of EOS would go to every directory in `confs/mp-*/eos_00` and do the post processing. Let's suppose we are now in `confs/mp-100/eos_00` and there are `task.000000`, `task.000001`, ..., `task.000039` in this directory. By reading `inter.json` file in every task directory, the task type can be determined and the energy and force information of every task can further be obtained. By appending the dict of energy and force into a list, an example of the list with 1 atom is given as:

```
[  
    {"energy": E1, "force": [fx1, fy1, fz1]},  
    {"energy": E2, "force": [fx2, fy2, fz2]},  
    ...  
    {"energy": E40, "force": [fx40, fy40, fz40]}  
]
```

Then the volume can be calculated from the task id and the corresponding energy can be obtained from the list above. Finally, there would be `result.json` in json format and `result.out` in txt format in `confs/mp-100/eos_00` containing the EOS results.

An example of `result.json` is give as:

```
{  
    "14.808453313267595": -3.7194474,  
    "14.972991683415014": -3.7242038,  
    ...  
    "17.934682346068534": -3.7087655  
}
```

An example of `result.out` is given below:

```
onf_dir: /root/auto_test_example/deepmd/confs/std-fcc/eos_00  
VpA(A^3)  EpA(eV)  
14.808    -3.7194  
14.973    -3.7242  
...        ...  
17.935    -3.7088
```

Elastic get started and input examples

Here we calculate the mechanical properties which include elastic constants (C11 to C66), bulk modulus Bv, shear modulus Gv, Youngs modulus Ev, and Poission ratio Uv of a certain crystal structure.

An example of the input file for Elastic by deepmd:

```
{
    "structures":      ["confs/mp-*","confs/std-*","confs/test-*"],
    "interaction": {
        "type": "deepmd",
        "model": "frozen_model.pb",
        "type_map": {"Al": 0, "Mg": 1}
    },
    "properties": [
        {
            "type": "elastic",
            "norm_deform": 1e-2,
            "shear_deform": 1e-2
        }
    ]
}
```

Here the default values of `norm_deform` and `shear_deform` are `1e-2` and `1e-2`, respectively. A list of `norm_strains` and `shear_strains` would be generated as below:

```
[-norm_def, -0.5 * norm_def, 0.5 * norm_def, norm_def]
[-shear_def, -0.5 * shear_def, 0.5 * shear_def, shear_def]
```

Elastic make

Step 1. The `DeformedStructureSet` module in `pymatgen.analysis.elasticity.strain` is used to generate a set of independently deformed structures. `equi.stress.out` file is written to record the equilibrium stress in the Elastic directory. For the example in the previous section, `equi.stress.out` should be in `confs/mp-*/elastic_00`.

Step 2. If there are `init_from_suffix` and `output_suffix` parameter in the `properties` part, the *refine process* follows. Else, the deformed structure (POSCAR) and strain information (`strain.out`) are written in the task directory, for example, in `confs/mp-*/elastic_00/task.000000`.

Step 3. When doing elastic by VASP, ISIF=2. When doing by LAMMPS, the following `in.lammps` would be written.

```
units          metal
dimension      3
boundary       p      p      p
atom_style    atomic
box           tilt large
read_data     conf.lmp
mass          1 1
mass          2 1
neigh_modify   every 1 delay 0 check no
pair_style    deepmd frozen_model.pb
```

(continues on next page)

(continued from previous page)

```

pair_coeff
compute      mtype all pe
thermo       100
thermo_style custom step pe pxx pyy pzz pxy pxz pyz lx ly lz vol c_mtype
dump         1 all custom 100 dump.relax id type xs ys zs fx fy fz
min_style    cg
minimize     0 1.000000e-10 5000 500000
variable     N equal count(all)
variable     V equal vol
variable     E equal "c_mtype"
variable     Pxx equal pxx
variable     Pyy equal pyy
variable     Pzz equal pzz
variable     Pxy equal pxy
variable     Pxz equal pxz
variable     Pyz equal pyz
variable     Epa equal ${E}/${N}
variable     Vpa equal ${V}/${N}
print "All done"
print "Total number of atoms = ${N}"
print "Final energy per atoms = ${Epa}"
print "Final volume per atoms = ${Vpa}"
print "Final Stress (xx yy zz xy xz yz) = ${Pxx} ${Pyy} ${Pzz} ${Pxy} ${Pxz} ${Pyz}"
```

Elastic run

Very similar to the `run` operation of EOS except for in different directories. Now the work path of each task should be in the form like `confs/mp-*/*elastic_00` and all task is in the form like `confs/mp-*/*elastic_00/task.[0-9]*[0-9]`.

Elastic post

The `ElasticTensor` module in `pymatgen.analysis.elasticity.elastic` is used to get the elastic tensor, Bv, and Gv. The mechanical properties of a crystal structure would be written in `result.json` in json format and `result.out` in txt format. The example of the output file is give below.

result.json

```
{  
    "elastic_tensor": [  
        134.90955999999997,  
        54.32995869999985,  
        51.80238609999985,  
        3.574527959999993,  
        -1.388632599999648e-05,  
        -1.963823399999486e-05,  
        54.55840299999999,  
        134.59654699999996,  
        51.7972336,
```

(continues on next page)

(continued from previous page)

```

-3.53972684,
1.839568799999963e-05,
8.756799399999951e-05,
51.91324859999999,
51.913292199999994,
137.01763799999998,
-5.090339399999969e-05,
6.99251629999996e-05,
3.736478699999946e-05,
3.8780564440000007,
-3.770445632,
-1.276620599999956,
35.41343199999999,
2.2479590800000023e-05,
1.3837692000000172e-06,
-4.959999999495933e-06,
2.5800000003918792e-06,
1.4800000030874965e-06,
2.900000008417968e-06,
35.37596019999994,
3.8608356,
0.0,
0.0,
0.0,
0.0,
4.02554856,
38.37501839999995
],
"BV": 80.3153630222222,
"GV": 38.40582656,
"EV": 99.37716395728943,
"uV": 0.2937771799031088
}

```

The order of `elastic_tensor` is C11, C12, ..., C16, C21, C22, ..., C26, ..., C66 and the unit of Bv, Gv, Ev, and uv is GPa.

result.out

```

/root/auto_test_example/deepmd/confs/std-fcc/elastic_00
134.91  54.33  51.80   3.57  -0.00  -0.00
 54.56  134.60  51.80  -3.54   0.00   0.00
 51.91  51.91  137.02 -0.00   0.00   0.00
  3.88  -3.77  -1.28  35.41   0.00   0.00
 -0.00   0.00   0.00   0.00  35.38   3.86
  0.00   0.00   0.00   0.00   4.03  38.38
# Bulk Modulus BV = 80.32 GPa
# Shear Modulus GV = 38.41 GPa
# Youngs Modulus EV = 99.38 GPa
# Poission Ratio uV = 0.29

```

Vacancy get started and input examples

Vacancy calculates the energy difference when removing an atom from the crystal structure. We only need to give the information of `supercell` to help calculate the vacancy energy and the default value of `supercell` is [1, 1, 1].

An example of the input file for Vacancy by deepmd:

```
{  
    "structures":      "confs/mp-*",  
    "interaction": {  
        "type":           "deepmd",  
        "model":         "frozen_model.pb",  
        "type_map":      {"Al": 0, "Mg": 1}  
    },  
    "properties": [  
        {  
            "type":       "vacancy",  
            "supercell": [1, 1, 1]  
        }  
    ]  
}
```

Vacancy make

Step 1. The `VacancyGenerator` module in `pymatgen.analysis.defects.generators` is used to generate a set of structures with vacancy.

Step 2. If there are `init_from_suffix` and `output_suffix` parameter in the properties part, the *refine process* follows. If `reproduce` is evoked, the *reproduce process* follows. Otherwise, the vacancy structure (POSCAR) and supercell information (`supercell.out`) are written in the task directory, for example, in `confs/mp-*/vacancy_00/task.000000` with the check and possible removing of the old input files like before.

Step 3. When doing vacancy by VASP, `ISIF = 3`. When doing vacancy by LAMMPS, the same `in.lammps` as that in *EOS (change_box is True)* would be generated with `scale` set to one.

Vacancy run

Very similar to the `run` operation of EOS except for in different directories. Now the work path of each task should be in the form like `confs/mp-*/vacancy_00` and all task is in the form like `confs/mp-*/vacancy_00/task.[0-9]*[0-9]`.

Vacancy post

For Vacancy, we need to calculate the energy difference between a crystal structure with and without a vacancy. The examples of the output files `result.json` in json format and `result.out` in txt format are given below.

result.json

```
{
  "[3, 3, 3]-task.000000": [
    0.7352769999999964,
    -96.644642,
    -97.379919
  ]
}
```

result.out

```
/root/auto_test_example/deepmd/confs/std-fcc/vacancy_00
Structure:          Vac_E(eV)   E(eV) equi_E(eV)
[3, 3, 3]-task.000000:  0.735  -96.645 -97.380
```

Interstitial get started and input examples

Interstitial calculates the energy difference when adding an atom into the crystal structure. We need to give the information of supercell (default value is [1, 1, 1]) and insert_ele list for the element types of the atoms added in.

An example of the input file for Interstitial by deepmd:

```
{
  "structures":      "confs/mp-*",
  "interaction": {
    "type":           "deepmd",
    "model":         "frozen_model.pb",
    "type_map":      {"Al": 0, "Mg": 1}
  },
  "properties": [
    {
      "type":         "interstitial",
      "supercell":   [3, 3, 3],
      "insert_ele":  ["Al"],
      "conf_filters": {"min_dist": 1.5},
      "cal_setting": {"input_prop": "lammmps_input/lammmps_high"}
    }
  ]
}
```

We add a conf_filters parameter in properties part and this parameter can help to eliminate undesirable structure which can render rather difficult convergence in calculations. In the example above, “**min_dist**”: **1.5** means if the smallest atomic distance in the structure is less than 1.5 angstrom, the configuration would be eliminated and not used in calculations.

Interstitial make

Step 1. For each element in `insert_ele` list, `InterstitialGenerator` module in `pymatgen.analysis.defects.generators` would help to generate interstitial structure. The structure would be appended into a list if it can meet the requirements in `conf_filters`.

Step 2. If `refine` is True, we do *refine process*. If `reprod-opt` is True (the default is `False`), we do *reproduce process*. Else, the vacancy structure (POSCAR) and supercell information (`supercell.out`) are written in the task directory, for example, in `confs/mp-* /interstitial_00/task.000000` with the check and possible removing of the old input files like before.

Step 3. In interstitial by VASP, `ISIF = 3`. In interstitial by LAMMPS, the same `in.lammps` as that in `EOS (change_box is True)` would be generated with `scale` set to one.

Interstitial run

Very similar to the `run` operation of `EOS` except for in different directories. Now the work path of each task should be in the form like `confs/mp-* /interstitial_00` and all task is in the form like `confs/mp-* /interstitial_00/task.[0-9]*[0-9]`.

Interstitial post

For `Interstitial`, we need to calculate the energy difference between a crystal structure with and without atom added in. The examples of the output files `result.json` in json format and `result.out` in txt format are given below.

result.json

```
{  
    "Al-[3, 3, 3]-task.000000": [  
        4.022952000000004,  
        -100.84773,  
        -104.870682  
    ],  
    "Al-[3, 3, 3]-task.000001": [  
        2.7829520000000088,  
        -102.08773,  
        -104.870682  
    ]  
}
```

result.out

```
/root/auto_test_example/deepmd/confs/std-fcc/interstitial_00  
Insert_ele-Struct: Inter_E(eV) E(eV) equi_E(eV)  
Al-[3, 3, 3]-task.000000: 4.023 -100.848 -104.871  
Al-[3, 3, 3]-task.000001: 2.783 -102.088 -104.871
```

Surface get started and input examples

Surface calculates the surface energy. We need to give the information of `min_slab_size`, `min_vacuum_size`, `max_miller` (default value is 2), and `pert_xz` which means perturbations in xz and will help work around vasp bug.

An example of the input file for Surface by deepmd:

```
{
    "structures":      "confs/mp-*",
    "interaction": {
        "type":           "deepmd",
        "model":         "frozen_model.pb",
        "type_map":       {"Al": 0, "Mg": 1}
    },
    "properties": [
        {
            "type":          "surface",
            "min_slab_size": 10,
            "min_vacuum_size": 11,
            "max_miller": 2,
            "cal_type": "static"
        }
    ]
}
```

Surface make

Step 1. Based on the equilibrium configuration, `generate_all_slabs` module in `pymatgen.core.surface` would help to generate surface structure list with using `max_miller`, `min_slab_size`, and `min_vacuum_size` parameters.

Step 2. If `refine` is True, we do *refine process*. If `reprod-opt` is True (the default is False), we do *reproduce process*. Otherwise, the surface structure (POSCAR) with perturbations in xz and miller index information (`miller.out`) are written in the task directory, for example, in `confs/mp-*/*interstitial_00/task.000000` with the check and possible removing of the old input files like before.

Surface run

Very similar to the `run` operation of EOS except for in different directories. Now the work path of each task should be in the form like `confs/mp-*/*surface_00` and all task is in the form like `confs/mp-*/*surface_00/task.[0-9]*[0-9]`.

Surface post

For Surface, we need to calculate the energy difference between a crystal structure with and without a surface with a certain miller index divided by the surface area.

The examples of the output files `result.json` in json format and `result.out` in txt format are given below.

result.json

```
{  
    "[1, 1, 1]-task.00000": [  
        0.8051037974207992,  
        -3.6035018,  
        -3.7453815  
    ],  
    "[2, 2, 1]-task.00001": [  
        0.9913881928811771,  
        -3.5781115999999997,  
        -3.7453815  
    ],  
    "[1, 1, 0]-task.00002": [  
        0.9457333586026173,  
        -3.5529366000000002,  
        -3.7453815  
    ],  
    "[2, 2, -1]-task.00003": [  
        0.9868013100872397,  
        -3.5590607142857142,  
        -3.7453815  
    ],  
    "[2, 1, 1]-task.00004": [  
        1.0138239046484236,  
        -3.563035875,  
        -3.7453815  
    ],  
    "[2, 1, -1]-task.00005": [  
        1.0661817319108005,  
        -3.5432459166666668,  
        -3.7453815  
    ],  
    "[2, 1, -2]-task.00006": [  
        1.034003253044026,  
        -3.550884125,  
        -3.7453815  
    ],  
    "[2, 0, -1]-task.00007": [  
}
```

(continues on next page)

(continued from previous page)

```

    0.9569958287615818,
    -3.5685403333333334,
    -3.7453815
],
"[2, -1, -1]-task.000008": [
    0.9432935501134583,
    -3.5774615714285716,
    -3.7453815
]
}

```

result.out

```

/root/auto_test_example/deepmd/confs/std-fcc/surface_00
Miller_Indices:      Surf_E(J/m^2) EpA(eV) equi_EpA(eV)
[1, 1, 1]-task.000000:   0.805     -3.604    -3.745
[2, 2, 1]-task.000001:   0.991     -3.578    -3.745
[1, 1, 0]-task.000002:   0.946     -3.553    -3.745
[2, 2, -1]-task.000003:   0.987     -3.559    -3.745
[2, 1, 1]-task.000004:   1.014     -3.563    -3.745
[2, 1, -1]-task.000005:   1.066     -3.543    -3.745
[2, 1, -2]-task.000006:   1.034     -3.551    -3.745
[2, 0, -1]-task.000007:   0.957     -3.569    -3.745
[2, -1, -1]-task.000008:   0.943     -3.577    -3.745

```

7.5 Refine

7.5.1 Refine get started and input examples

Sometimes we want to refine the calculation of a property from previous results. For example, when higher convergence criteria EDIFF and EDIFFG are necessary in VASP, the new VASP calculation is desired to start from the previous output configuration, rather than starting from scratch.

An example of the input file `refine.json` is given below:

```
{
  "structures":      ["confs/std-*"],
  "interaction": {
    "type":           "deepmd",
    "model":          "frozen_model.pb",
    "type_map":       {"Al": 0}
  },
  "properties": [
    {
      "type":           "vacancy",
      "init_from_suffix": "00",
      "output_suffix":   "01",
      "cal_setting":    {"input_prop": "lammmps_input/lammmps_high"}
    }
  ]
}
```

(continues on next page)

(continued from previous page)

```
    }
]
}
```

In this example, `refine` would output the results to `vacancy_01` based on the previous results in `vacancy_00` by using a different input commands file for lammmps.

7.5.2 Refine make

```
dpgen autotest make refine.json  
tree confs/std-fcc/vacancy_01/
```

the output will be:

```
confs/std-fcc/vacancy_01/  
|--- frozen_model.pb -> ../../../../frozen_model.pb  
|--- in.lammps  
└-- task.000000  
    |--- conf.lmp  
    |--- frozen_model.pb -> ./frozen_model.pb  
    |--- in.lammps -> ./in.lammps  
    |--- inter.json  
    |--- POSCAR -> ../../vacancy_00/task.000000/CONTCAR  
    |--- supercell.json -> ../../vacancy_00/task.000000/supercell.json  
    └-- task.json
```

a new directory `vacancy_01` would be established and the starting configuration links to previous results.

7.5.3 Refine run

```
nohup dpgen autotest run refine.json machine-ali.json > run.result 2>&1 &
```

the run process of `refine` is similar to before.

7.5.4 Refine post

```
dpgen autotest post refine.json
```

the post process of `refine` is similar to the corresponding property.

7.6 Reproduce

7.6.1 Reproduce get started and input examples

Sometimes we want to reproduce the initial results with the same configurations for cross validation. This version of autotest package can accomplish this successfully in all property types except for Elastic. An input example for using deepmd to reproduce the VASP Interstitial results is given below:

```
{
  "structures":      ["confs/std-*"],
  "interaction": {
    "type":          "deepmd",
    "model":         "frozen_model.pb",
    "type_map":      {"Al": 0}
  },
  "properties": [
    {
      "type":          "interstitial",
      "reproduce":     true,
      "init_from_suffix": "00",
      "init_data_path": "../vasp/confs",
      "reprod_last_frame": false
    }
  ]
}
```

reproduce denotes whether to do reproduce or not and the default value is False.

init_data_path is the path of VASP or LAMMPS initial data to be reproduced. init_from_suffix is the suffix of the initial data and the default value is “00”. In this case, the VASP Interstitial results are stored in ../vasp/confs/std-*/interstitial_00 and the reproduced Interstitial results would be in deepmd/confs/std-*/interstitial_reprod.

reprod_last_frame denotes if only the last frame is used in reproduce. The default value is True for eos and surface, but is False for vacancy and interstitial.

7.6.2 Reproduce make

```
dpgen autotest make reproduce.json
tree confs/std-fcc/interstitial_reprod/
```

the output will be:

```
confs/std-fcc/interstitial_reprod/
|-- frozen_model.pb -> ../../../../../frozen_model.pb
|-- in.lammps
|-- task.000000
|   |-- conf.lmp
|   |-- frozen_model.pb -> ./frozen_model.pb
|   |-- in.lammps -> ./in.lammps
|   |-- inter.json
|   |-- POSCAR
```

(continues on next page)

(continued from previous page)

```

|   |-- task.json
|   |-- task.000001
|   |   |-- conf.lmp
|   |   |-- frozen_model.pb -> ../frozen_model.pb
|   |   |-- in.lammps -> ../in.lammps
|   |   |-- inter.json
|   |   |-- POSCAR
|   |   |-- task.json
...
|   |-- task.000038
|   |   |-- conf.lmp
|   |   |-- frozen_model.pb -> ../frozen_model.pb
|   |   |-- in.lammps -> ../in.lammps
|   |   |-- inter.json
|   |   |-- POSCAR
|   |   |-- task.json

```

every singe frame in the initial data is split into each task and the following `in.lammps` would help to do the static calculation:

```

clear
units          metal
dimension      3
boundary       p p p
atom_style    atomic
box            tilt large
read_data     conf.lmp
mass           1 26.982
neigh_modify   every 1 delay 0 check no
pair_style     deepmd frozen_model.pb
pair_coeff
compute        mype all pe
thermo         100
thermo_style   custom step pe pxx pyy pzz pxy pxz pyz lx ly lz vol c_mype
dump           1 all custom 100 dump.relax id type xs ys zs fx fy fz
run            0
variable       N equal count(all)
variable       V equal vol
variable       E equal "c_mype"
variable       tmlx equal lx
variable       tmly equal ly
variable       Pxx equal pxx
variable       Pyy equal pyy
variable       Pzz equal pzz
variable       Pxy equal pxy
variable       Pxz equal pxz
variable       Pyz equal pyz
variable       Epa equal ${E}/${N}
variable       Vpa equal ${V}/${N}
variable       AA equal (${tmplx}*${tmly})
print "All done"
print "Total number of atoms = ${N}"

```

(continues on next page)

(continued from previous page)

```
print "Final energy per atoms = ${Epa}"
print "Final volume per atoms = ${Vpa}"
print "Final Base area = ${AA}"
print "Final Stress (xx yy zz xy xz yz) = ${Pxx} ${Pyy} ${Pzz} ${Pxy} ${Pxz} ${Pyz}"
```

7.6.3 Reproduce run

```
nohup dpigen autotest run reproduce.json machine-ali.json > run.result 2>&1 &
```

the run process of reproduce is similar to before.

7.6.4 Reproduce post

```
dpigen autotest post reproduce.json
```

the output will be:

result.out:

```
/root/auto_test_example/deepmd/confs/std-fcc/interstitial_reprod
Reproduce: Initial_path Init_E(eV/atom) Reprod_E(eV/atom) Difference(eV/atom)
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.020 -3.240 -0.220
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.539 -3.541 -0.002
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.582 -3.582 -0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.582 -3.581 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.594 -3.593 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.594 -3.594 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.598 -3.597 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.600 -3.600 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.600 -3.600 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.601 -3.600 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.602 -3.601 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000000 -3.603 -3.602 0.001
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.345 -3.372 -0.027
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.546 -3.556 -0.009
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.587 -3.593 -0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.593 -3.599 -0.006
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.600 -3.606 -0.006
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.600 -3.606 -0.006
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.624 -3.631 -0.006
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.634 -3.640 -0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.637 -3.644 -0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.637 -3.644 -0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001 -3.638 -3.645 -0.007
```

(continues on next page)

(continued from previous page)

.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.638	-3.645	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007
.../vasp/confs/std-fcc/interstitial_00/task.000001	-3.639	-3.646	-0.007

the comparison of the initial and reproduced results as well as the absolute path of the initial data is recorded.

`result.json`:

```
{
    "/root/auto_test_example/vasp/confs/std-fcc/interstitial_00/task.000000": {
        "nframes": 18,
        "error": 0.0009738182472213228
    },
    "/root/auto_test_example/vasp/confs/std-fcc/interstitial_00/task.000001": {
        "nframes": 21,
        "error": 0.0006417039154057605
    }
}
```

the error analysis corresponding to the initial data is recorded and the error of the first frame is disregarded when all the frames are considered in reproduce.

USER GUIDE

This part aims to show you how to get the community's help. Some frequently asked questions are listed in troubleshooting, and the explanation of errors that often occur is listed in common errors. If other unexpected problems occur, you're welcome to contact us for help.

8.1 Discussions

Welcome everyone to participate in the discussion about DP-GEN in the [discussion](#) module. You can ask for help, share an idea or anything to discuss here. Note: before you raise a question, please check TUTORIAL/FAQs and search history discussions to find solutions.

8.2 Issue

If you want to make a bug report or a request for new features, you can make an issue in the issue module.

Here are the types you can choose. A proper type can help developer figure out what you need. Also, you can assign yourself to solve the issue. Your contribution is welcome!

Note: before you raise a question, please check TUTORIAL/FAQs and search history issues to find solutions.

8.3 Tutorials

Tutorials can be found [here](#).

8.4 Example for parameters

If you have no idea how to prepare a PARAM for your task, you can find examples of PARAM for different tasks in [examples](#).

For example, if you want to set specific template for LAMMPS, you can find an example [here](#)

If you want to learn more about Machine parameters, please check docs for [dpdispatcher](#)

8.5 Pull requests - How to contribute

8.6 Troubleshooting

1. The most common problem is whether two settings correspond with each other, including:
 - The order of elements in `type_map` and `mass_map` and `fp_pp_files`.
 - Size of `init_data_sys` and `init_batch_size`.
 - Size of `sys_configs` and `sys_batch_size`.
 - Size of `sel_a` and actual types of atoms in your system.
 - Index of `sys_configs` and `sys_idx`.
2. Please verify the directories of `sys_configs`. If there isn't any POSCAR for `01.model_devi` in one iteration, it may happen that you write the false path of `sys_configs`. Note that `init_data_sys` is a list, while `sys_configs` should be a two-dimensional list. The first dimension corresponds to `sys_idx`, and the second level are some poscars under each group. Refer to the [sample file](#).
3. Correct format of JSON file.
4. The frames of one system should be larger than `batch_size` and `numb_test` in `default_training_param`. It happens that one iteration adds only a few structures and causes error in next iteration's training. In this condition, you may let `fp_task_min` be larger than `numb_test`.
5. If you found the dpgen with the same version on two machines behaves differently, you may have modified the code in one of them.

8.7 Common Errors

(Errors are sorted alphabetically)

8.7.1 Command not found: xxx.

There is no such software in the environment, or it is unavailable. It may be because 1. It is not installed; 2. The Conda environment is not activated; 3. You have chosen the wrong image in machine.json.

8.7.2 `dargs.dargs.ArgumentKeyError: [at location xxx] undefined key xxx is not allowed in strict mode.`

Strict format check has been applied since version 0.10.7. To avoid misleading users, some older-version keys that are already ignored or absorbed into default settings are not allowed to be present. And the expected structure of the dictionary in the param.json also differs from those before version 0.10.7. This error will occur when format check finds older-fashion keys in the json file. Please try deleting or annotating these keys, or correspondingly modulate the json file. Example files in the newest format could be found in [examples](#).

8.7.3 dargs.dargs.ArgumentTypeError: [at root location] key xxx gets wrong value type, requires but gets

Please check your parameters with DPGEN's Document. Maybe you have superfluous parentheses in your parameter file.

8.7.4 FileNotFoundError: [Errno 2] No such file or directory: '/01.model_devi/graph.xxx.pb'

If you find this error occurs, please check your initial data. Your model will not be generated if the initial data is incorrect.

8.7.5 json.decoder.JSONDecodeError

Your .json file is incorrect. It may be a mistake in syntax or a missing comma.

8.7.6 OSError: [Error cannot find valid a data system] Please check your setting for data systems

Check if the path to the dataset in the parameter file is set correctly. Note that `init_data_sys` is a list, while `sys_configs` should be a two-dimensional list. The first dimension corresponds to `sys_idx`, and the second level are some poscars under each group. Refer to the [sample file](#).

8.7.7 RuntimeError: job:xxxxxxx failed 3 times

```
RuntimeError: job:xxxxxxx failed 3 times
.....
RuntimeError: Meet errors will handle unexpected submission state.
Debug information: remote_root==xxxxxx
Debug information: submission_hash==xxxxxx
Please check the dirs and scripts in remote_root. The job information mentioned above
may help.
```

If a user finds an error like this, he or she is advised to check the files on the remote server. It shows that your job has failed 3 times, but has not shown the reason.

To find the reason, you can check the log on the remote root. For example, you can check `train.log`, which is generated by DeePMD-kit. It can tell you more details. If it doesn't help, you can manually run the `.sub` script, whose path is shown in `Debug information: remote_root==xxxxxx`

Some common reasons are as follows:

1. Two or more jobs are submitted manually or automatically at the same time, and their hash value collide. This bug will be fixed in `dpdispatcher`.
2. You may have something wrong in your input files, which causes the process to fail.

8.7.8 **RuntimError: find too many unsuccessfully terminated jobs.**

The ratio of failed jobs is larger than ratio_failure. You can set a high value for ratio_failure or check if there is something wrong with your input files.

8.7.9 **ValueError: Cannot load file containing picked data when allow_picked=False**

Please ensure that you write the correct path of the dataset with no excess files.

8.7.10 **warnings.warn(“Some Gromacs commands were NOT found; “**

You can ignore this warning if you don't need Gromacs. It just show that Gromacs is not installed in you environment.

CONTRIBUTING GUIDE

9.1 Contributing Guide

The way to make contributions is through making pull requests(PR for short). After your PR is merged, the changes you make can be applied by other users.

Firstly, fork in DP-GEN repository. Then you can clone the repository, build a new branch, make changes and then make a pull request.

9.1.1 How to contribute to DP-GEN

Welcome to the repository of [DP-GEN](#)

DP-GEN adopts the same convention as other software in DeepModeling Community.

You can first refer to DeePMD-kit's [Contributing guide](#) and [Developer guide](#).

You can also read relative chapters on [Github Docs](#).

If you have no idea how to fix your problem or where to find the relative source code, please check [Code Structure](#) of the DP-GEN repository on this website.

Use command line

You can use git with the command line, or open the repository on Github Desktop. Here is a video as a demo of making changes to DP-GEN and publishing it with command line.

If you have never used Github before, remember to generate your ssh key and configure the public key in Github Settings. If you can't configure your username and password, please use token. The explanation from Github see [Github Blog: token authentication requirements for git operations](#). A discussion on [StackOverflow](#) can solve this problem.

Use Github Desktop

Also, you can use Github Desktop to make PR. The following shows the steps to clone the repository and add your doc to tutorials. If it is your first time using Github, Open with Github Desktop is recommended. Github Desktop is a software, which can make your operations on branches visually.

After you clone it to your PC, you can open it with Github Desktop.

Firstly, create your new branch based on devel branch.

Secondly, add your doc to the certain directory in your local repository, and add its name into index.

Here is an [example](#). Remember to add the filename of your doc into index!

Thirdly, select the changes that you want to push, and commit to it. Press “Publish branch” to push your origin repository to the remote branch.

Finally, you can check it on github and make a pull request. Press “Compare & pull request” to make a PR.

(Note: please commit pr to the devel branch)

9.1.2 How to contribute to DP-GEN tutorials and documents

Welcome to [the documents of DP-GEN](#)

- If you want to add the documentation of a toy model, simply put your file in the directory doc/toymodels/ and push;
- If you want to add a new directory for a new category of instructions, make a new directory and add it in doc/index.rst.

Also welcome to [Tutorials repository](#) You can find the structure of tutorials and preparations before writing a document in [Writing Tips](#).

The latest page of DP-GEN Docs

Examples of contributions

- [Example 1](#)
- [Example 2](#) (a simple one for beginner)

1. Push your doc

2. Add the directory in index.rst

3. Build and check it

As mentioned in “How to build the website to check if the modification works”.

4. Make pull request to dpigen

9.1.3 Find how a parameter is used in the code

It is strongly recommended that you use the `find in files` function of Visual Studio software, Search function of Visual Studio Code, or similar functions of other software. Type in the name of the parameter you are looking for, and you will see where it is read in and used in the procedure. Of course, you can also search for the relevant code according to the above guide.

9.1.4 Want to modify a function?

If you have special requirements, you can make personalized modifications in the code corresponding to the function. If you think your modification can benefit the public, and it does not conflict with the current DP-GEN function; or if you fix a bug, please make a pull request to contribute the optimization to the DP-GEN repository.

9.1.5 DP-GEN dependencies

dpp dispatcher and dpp data are dependencies of DP-GEN. dpp dispatcher is related to task submission, monitoring and recovery, and dpp data is related to data processing. If you encounter an error and want to find the reason, please judge whether the problem comes from DP-GEN, dpp dispatcher or dpp data according to the last line of Traceback.

9.1.6 About the update of the parameter file

You may have noticed that there are arginfo.py files in many folders. This is a file used to generate parameter documentation. If you add or modify a parameter in DP-GEN and intend to export it to the main repository, please sync your changes in arginfo.

9.1.7 Tips

1. Please try to submit a PR after finishing all the changes
2. Please briefly describe what you do with `git commit -m "<conclude-the-change-you-make>"!` "No description provided." will make the maintainer feel confused.
3. It is not recommended to make changes directly in the `devel` branch. It is recommended to pull a branch from `devel`: `git checkout -b <new-branch-name>`
4. When switching branches, remember to check if you want to bring the changes to the next branch!
5. Please fix the errors reported by the unit test. You can firstly test on your local machine before pushing commits.
Hint: The way to test the code is to go from the main directory to the tests directory, and use the command `python3 -m unittest`. You can watch the demo video for review. Sometimes you may fail unit tests due to your local circumstance. You can check whether the error reported is related to the part you modified to eliminate this problem. After submitting, as long as there is a green check mark after the PR title on the webpage, it means that the test has been passed.
6. Pay attention to whether there are comments under your PR. If there is a change request, you need to check and modify the code. If there are conflicts, you need to solve them manually.

After successfully making a PR, developers will check it and give comments. It will be merged after everything done. Then CONGRATULATIONS! You become a first-time contributor to DP-GEN!

How to get help from the community

DP-GEN API

10.1 dpgen package

`dpgen.info()`

10.1.1 Subpackages

`dpgen.auto_test` package

Subpackages

`dpgen.auto_test.lib` package

Submodules

`dpgen.auto_test.lib.abacus` module

`dpgen.auto_test.lib.abacus.check_finished(fname)`

`dpgen.auto_test.lib.abacus.check_stru_fixed(struf, fixed)`

`dpgen.auto_test.lib.abacus.final_stru(abacus_path)`

`dpgen.auto_test.lib.abacus.make_kspacing_kpt(struf, kspacing)`

`dpgen.auto_test.lib.abacus.modify_stru_path(strucf, tpath)`

`dpgen.auto_test.lib.abacus.poscar2stru(poscar, inter_param, stru='STRU')`

- poscar: POSCAR for input
- `inter_param`: dictionary of ‘interaction’ from `param.json`

some key words for ABACUS are:

- atom_masses: a dictionary of atoms’ masses
- orb_files: a dictionary of orbital files
- deepks_desc: a string of deepks descriptor file

- stru: output filename, usually is ‘STRU’.

`dpgen.auto_test.lib.abacus.stru2Structure(struf)`

```
dpigen.auto_test.lib.abacus.stru_fix_atom(struf, fix_atom=[True, True, True])
... ATOMIC_POSITIONS Cartesian #Cartesian(Unit is LATTICE_CONSTANT) Si #Name of element 0.0
#Magnetic for this element. 2 #Number of atoms 0.00 0.00 0.00 0 0 0 #x,y,z, move_x, move_y, move_z 0.25
0.25 0.25 0 0 0.

dpigen.auto_test.lib.abacus.stru_scale(stru_in, stru_out, scale)
dpigen.auto_test.lib.abacus.write_input(inputf, inputdict)
dpigen.auto_test.lib.abacus.write_kpt(kptf, kplist)
```

dpigen.auto_test.lib.crys module

```
dpigen.auto_test.lib.crys.bcc(ele_name='ele', a=3.2144871302356037)
dpigen.auto_test.lib.crys.dhcp(ele_name='ele', a=2.863782463805517, c=9.353074360871936)
dpigen.auto_test.lib.crys.diamond(ele_name='ele', a=2.551340126037118)
dpigen.auto_test.lib.crys.fcc(ele_name='ele', a=4.05)
dpigen.auto_test.lib.crys.fcc1(ele_name='ele', a=4.05)
dpigen.auto_test.lib.crys.hcp(ele_name='ele', a=2.863782463805517, c=4.676537180435968)
dpigen.auto_test.lib.crys.sc(ele_name='ele', a=2.551340126037118)
```

dpigen.auto_test.lib.lammps module

```
dpigen.auto_test.lib.lammps.apply_type_map(conf_file, deepmd_type_map, ptypes)
Apply type map. conf_file: conf file converted from POSCAR deepmd_type_map: deepmd atom type map
ptypes: atom types defined in POSCAR.

dpigen.auto_test.lib.lammps.check_finished(fname)
dpigen.auto_test.lib.lammps.check_finished_new(fname, keyword)
dpigen.auto_test.lib.lammps.cvt_lammps_conf(fin, fout, type_map, ofmt='lammps/data')
Format convert from fin to fout, specify the output format by ofmt Imcomplete situation.

dpigen.auto_test.lib.lammps.element_list(type_map)
dpigen.auto_test.lib.lammps.get_base_area(log)
Get base area.

dpigen.auto_test.lib.lammps.get_nev(log)
Get natoms, energy_per_atom and volume_per_atom from lammps log.

dpigen.auto_test.lib.lammps.get_stress(log)
Get stress from lammps log.

dpigen.auto_test.lib.lammps.inter_deepmd(param)
dpigen.auto_test.lib.lammps.inter_eam_alloy(param)
dpigen.auto_test.lib.lammps.inter_eam_fs(param)
```

```
dpigen.auto_test.lib.lammps.inter_mean(param)
dpigen.auto_test.lib.lammps.make_lammps_elastic(conf, type_map, interaction, param, etol=0,
                                                ftol=1e-10, maxiter=5000, maxeval=500000)
dpigen.auto_test.lib.lammps.make_lammps_equi(conf, type_map, interaction, param, etol=0, ftol=1e-10,
                                              maxiter=5000, maxeval=500000, change_box=True)
```

```
dpigen.auto_test.lib.lammps.make_lammps_eval(conf, type_map, interaction, param)
```

```
dpigen.auto_test.lib.lammps.make_lammps_phonon(conf, masses, interaction, param, etol=0, ftol=1e-10,
                                                 maxiter=5000, maxeval=500000)
```

Make lammps input for elastic calculation.

```
dpigen.auto_test.lib.lammps.make_lammps_press_relax(conf, type_map, scale2equi, interaction, param,
                                                      B0=70, bp=0, etol=0, ftol=1e-10, maxiter=5000,
                                                      maxeval=500000)
```

```
dpigen.auto_test.lib.lammps.poscar_from_last_dump(dump, poscar_out, deepmd_type_map)
```

Get poscar from the last frame of a lammps MD traj (dump format).

dpigen.auto_test.lib.lmp module

```
dpigen.auto_test.lib.lmp.box2lmpbox(orig, box)
```

```
dpigen.auto_test.lib.lmp.from_system_data(system)
```

```
dpigen.auto_test.lib.lmp.get_atoms(lines)
```

```
dpigen.auto_test.lib.lmp.get_atype(lines)
```

```
dpigen.auto_test.lib.lmp.get_lmpbox(lines)
```

```
dpigen.auto_test.lib.lmp.get_natoms(lines)
```

```
dpigen.auto_test.lib.lmp.get_natoms_vec(lines)
```

```
dpigen.auto_test.lib.lmp.get_natomtypes(lines)
```

```
dpigen.auto_test.lib.lmp.get_posi(lines)
```

```
dpigen.auto_test.lib.lmp.lmpbox2box(lohi, tilt)
```

```
dpigen.auto_test.lib.lmp.system_data(lines)
```

```
dpigen.auto_test.lib.lmp.to_system_data(lines)
```

dpigen.auto_test.lib.mfp_eosfit module

```
dpigen.auto_test.lib.mfp_eosfit.BM4(vol, pars)
```

Birch-Murnaghan 4 pars equation from PRB 70, 224107, 3-order.

```
dpigen.auto_test.lib.mfp_eosfit.BM5(vol, pars)
```

Birch-Murnaghan 5 pars equation from PRB 70, 224107, 4-Order.

```
dpigen.auto_test.lib.mfp_eosfit.LOG4(vol, pars)
```

Natrual strain (Poirier-Tarantola)EOS with 4 paramters Seems only work in near-equilibrium range.

```
dpigen.auto_test.lib.mfp_eosfit.LOG5(vol, parameters)
```

Natrual strain (Poirier-Tarantola)EOS with 5 paramters.

```
dpigen.auto_test.lib.mfp_eosfit.Li4p(V, parameters)
```

Li JH, APL, 87, 194111 (2005).

```
dpigen.auto_test.lib.mfp_eosfit.SJX_5p(vol, par)
```

SJX_5p's five parameters EOS, Physica B: Condens Mater, 2011, 406: 1276-1282.

```
dpigen.auto_test.lib.mfp_eosfit.SJX_v2(vol, par)
```

Sun Jiuxun, et al. J phys Chem Solids, 2005, 66: 773-782. They said it is satisfied for the limiting condition at high pressure.

```
dpigen.auto_test.lib.mfp_eosfit.TEOS(v, par)
```

Holland, et al, Journal of Metamorphic Geology, 2011, 29(3): 333-383 Modified Tait equation of Huang & Chow.

```
dpigen.auto_test.lib.mfp_eosfit.birch(v, parameters)
```

From Intermetallic compounds: Principles and Practice, Vol. I: Principles Chapter 9 pages 195-210 by M. Mehl. B. Klein, D. Papaconstantopoulos paper downloaded from Web.

case where n=0

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_BM4(pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_LOG4(pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_SJX_5p(par)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_mBm4(pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_mBm4poly(pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_mBm5poly(pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_morse(pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_morse_6p(par)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_props_vinet(pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_v0_mBm4poly(x, pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.calc_v0_mBm5poly(x, pars)
```

```
dpigen.auto_test.lib.mfp_eosfit.ext_splint(xp, yp, order=3, method='unispl')
```

```
dpigen.auto_test.lib.mfp_eosfit.ext_vec(func, fin, p0, fs, fe, vols=None, vole=None, ndata=101, refit=0,  
show_fig=False)
```

Extrapolate the data points for E-V based on the fitted parameters in small or very large volume range.

```
dpigen.auto_test.lib.mfp_eosfit.ext_velp(fin, fstart, fend, vols, vole, ndata, order=3, method='unispl',  
fout='ext_velp.dat', show_fig=False)
```

Extrapolate the lattice parameters based on input data.

```
dpigen.auto_test.lib.mfp_eosfit.get_eos_list()
```

```

dpigen.auto_test.lib.mfp_eosfit.get_eos_list_3p()
dpigen.auto_test.lib.mfp_eosfit.get_eos_list_4p()
dpigen.auto_test.lib.mfp_eosfit.get_eos_list_5p()
dpigen.auto_test.lib.mfp_eosfit.get_eos_list_6p()
dpigen.auto_test.lib.mfp_eosfit.init_guess(fin)
dpigen.auto_test.lib.mfp_eosfit.lsqfit_eos(func, fin, par, fstart, fend, show_fig=False, fout='EoSfit.out', refit=-1)
dpigen.auto_test.lib.mfp_eosfit.mBM4(vol, pars)
    Birch-Murnaghan 4 pars equation from PRB 70, 224107, 3-order BM.
dpigen.auto_test.lib.mfp_eosfit.mBM4poly(vol, parameters)
    Modified BM5 EOS, Shang SL comput mater sci, 2010: 1040-1048, original expressions.
dpigen.auto_test.lib.mfp_eosfit.mBM5(vol, pars)
    Modified BM5 EOS, Shang SL comput mater sci, 2010: 1040-1048.
dpigen.auto_test.lib.mfp_eosfit.mBM5poly(vol, pars)
    Modified BM5 EOS, Shang SL comput mater sci, 2010: 1040-1048, original expressions.
dpigen.auto_test.lib.mfp_eosfit.mie(v, p)
    Mie model for song's FVT.
dpigen.auto_test.lib.mfp_eosfit.mie_simple(v, p)
    Mie_simple model for song's FVT.
dpigen.auto_test.lib.mfp_eosfit.morse(v, pars)
    Reproduce from ShunliShang's matlab script.
dpigen.auto_test.lib.mfp_eosfit.morse_3p(volume, p)
    morse_AB EOS formula from Song's FVT souces A= 0.5*B.
dpigen.auto_test.lib.mfp_eosfit.morse_6p(vol, par)
    Generalized Morse EOS proposed by Qin, see: Qin et al. Phys Rev B, 2008, 78, 214108. Qin et al. Phys Rev B, 2008, 77, 220103(R).
dpigen.auto_test.lib.mfp_eosfit.morse_AB(volume, p)
    morse_AB EOS formula from Song's FVT souces.
dpigen.auto_test.lib.mfp_eosfit.murnaghan(vol, pars)
    Four-parameters murnaghan EOS. From PRB 28,5480 (1983).
dpigen.auto_test.lib.mfp_eosfit.parse_argument()
dpigen.auto_test.lib.mfp_eosfit.rBM4(vol, pars)
    Implementations as Alberto Otero-de-la-Roza, i.e. rBM4 is used here Comput Physics Comm, 2011, 182: 1708-1720.
dpigen.auto_test.lib.mfp_eosfit.rBM4_pv(vol, pars)
    Implementations as Alberto Otero-de-la-Roza, i.e. rBM4 is used here Comput Physics Comm, 2011, 182: 1708-1720 Fit for V-P relations.

```

`dpgen.auto_test.lib.mfp_eosfit.rBM5(vol, pars)`

Implementations as Alberto Otero-de-la-Roza, i.e. rBM5 is used here Comput Physics Comm, 2011, 182: 1708-1720.

`dpgen.auto_test.lib.mfp_eosfit.rBM5_pv(vol, pars)`

Implementations as Alberto Otero-de-la-Roza, i.e. rBM5 is used here Comput Physics Comm, 2011, 182: 1708-1720 Fit for V-P relations.

`dpgen.auto_test.lib.mfp_eosfit.rPT4(vol, pars)`

Natrual strain EOS with 4 paramters Seems only work in near-equilibrium range. Implementations as Alberto Otero-de-la-Roza, i.e. rPT4 is used here Comput Physics Comm, 2011, 182: 1708-1720, in their article, labeled as PT3 (3-order), however, we mention it as rPT4 for 4-parameters EOS.

`dpgen.auto_test.lib.mfp_eosfit.rPT4_pv(vol, pars)`

Natrual strain (Poirier-Tarantola)EOS with 4 paramters Seems only work in near-equilibrium range. Implementations as Alberto Otero-de-la-Roza, i.e. rPT4 is used here Comput Physics Comm, 2011, 182: 1708-1720, in their article, labeled as PT3 (3-order), however, we mention it as rPT4 for 4-parameters EOS.

`dpgen.auto_test.lib.mfp_eosfit.rPT5(vol, pars)`

Natrual strain EOS with 4 paramters Seems only work in near-equilibrium range. Implementations as Alberto Otero-de-la-Roza, i.e. rPT5 is used here Comput Physics Comm, 2011, 182: 1708-1720, in their article, labeled as PT3 (3-order), however, we mention it as rPT5 for 4-parameters EOS.

`dpgen.auto_test.lib.mfp_eosfit.rPT5_pv(vol, pars)`

Natrual strain (Poirier-Tarantola)EOS with 5 paramters Implementations as Alberto Otero-de-la-Roza, i.e. rPT5 is used here Comput Physics Comm, 2011, 182: 1708-1720, in their article, labeled as PT3 (3-order), however, we mention it as rPT5 for 4-parameters EOS.

`dpgen.auto_test.lib.mfp_eosfit.read_ve(fin)`

`dpgen.auto_test.lib.mfp_eosfit.read_velp(fin, fstart, fend)`

`dpgen.auto_test.lib.mfp_eosfit.read_vlp(fin, fstart, fend)`

`dpgen.auto_test.lib.mfp_eosfit.repro_ve(func, vol_i, p)`

`dpgen.auto_test.lib.mfp_eosfit.repro_vp(func, vol_i, pars)`

`dpgen.auto_test.lib.mfp_eosfit.res_BM4(pars, y, x)`

`dpgen.auto_test.lib.mfp_eosfit.res_BM5(pars, y, x)`

`dpgen.auto_test.lib.mfp_eosfit.res_LOG4(pars, y, x)`

`dpgen.auto_test.lib.mfp_eosfit.res_LOG5(pars, y, x)`

`dpgen.auto_test.lib.mfp_eosfit.res_Li4p(p, y, x)`

`dpgen.auto_test.lib.mfp_eosfit.res_SJX_5p(p, e, v)`

`dpgen.auto_test.lib.mfp_eosfit.res_SJX_v2(p, e, v)`

`dpgen.auto_test.lib.mfp_eosfit.res_TEOS(p, e, v)`

`dpgen.auto_test.lib.mfp_eosfit.res_birch(pars, y, x)`

`dpgen.auto_test.lib.mfp_eosfit.res_mBm4(pars, y, x)`

`dpgen.auto_test.lib.mfp_eosfit.res_mBm4poly(pars, y, x)`

```
dpigen.auto_test.lib.mfp_eosfit.res_mBm5(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_mBm5poly(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_mie(p, e, v)
dpigen.auto_test.lib.mfp_eosfit.res_mie_simple(p, e, v)
dpigen.auto_test.lib.mfp_eosfit.res_morse(p, en, volume)
dpigen.auto_test.lib.mfp_eosfit.res_morse_3p(p, en, volume)
dpigen.auto_test.lib.mfp_eosfit.res_morse_6p(p, en, volume)
dpigen.auto_test.lib.mfp_eosfit.res_morse_AB(p, en, volume)
dpigen.auto_test.lib.mfp_eosfit.res_murnaghan(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_rBM4(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_rBM4_pv(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_rBM5(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_rBM5_pv(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_rPT4(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_rPT4_pv(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_rPT5(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_rPT5_pv(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_universal(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_vinet(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.res_vinet_pv(pars, y, x)
dpigen.auto_test.lib.mfp_eosfit.universal(vol, parameters)
    Universal equation of state(Vinet P et al., J. Phys.: Condens. Matter 1, p1941 (1989)).
dpigen.auto_test.lib.mfp_eosfit.vinet(vol, pars)
    Vinet equation from PRB 70, 224107 Following, Shang Shunli et al., comput mater sci, 2010: 1040-1048,
    original expressions.
dpigen.auto_test.lib.mfp_eosfit.vinet_pv(vol, pars)
```

dpigen.auto_test.lib.pwscf module

```
dpigen.auto_test.lib.pwscf.make_pwscf_input(sys_data, fp_pp_files, fp_params)
```

dpgen.auto_test.lib.siesta module

```
dpgen.auto_test.lib.siesta.make_siesta_input(sys_data, fp_pp_files, fp_params)
```

dpgen.auto_test.lib.util module

```
dpgen.auto_test.lib.util.collect_task(all_task, task_type)
dpgen.auto_test.lib.util.get_machine_info(mdata, task_type)
dpgen.auto_test.lib.util.insert_data(task, task_type, username, file_name)
dpgen.auto_test.lib.util.make_work_path(jdata, task, reprod_opt, static, user)
dpgen.auto_test.lib.util.voigt_to_stress(inpt)
```

dpgen.auto_test.lib.utils module

```
dpgen.auto_test.lib.utils.cmd_append_log(cmd, log_file)
dpgen.auto_test.lib.utils.copy_file_list(file_list, from_path, to_path)
dpgen.auto_test.lib.utils.create_path(path)
dpgen.auto_test.lib.utils.log_iter(task, ii, jj)
dpgen.auto_test.lib.utils.log_task(message)
dpgen.auto_test.lib.utils.make_iter_name(iter_index)
dpgen.auto_test.lib.utils.record_iter(record, confs, ii, jj)
dpgen.auto_test.lib.utils.repeat_to_length(string_to_expand, length)
dpgen.auto_test.lib.utils.replace(file_name, pattern, subst)
```

dpgen.auto_test.lib.vasp module

```
exception dpgen.auto_test.lib.vasp.OutcarItem Error
```

Bases: Exception

```
dpgen.auto_test.lib.vasp.check_finished(fname)
dpgen.auto_test.lib.vasp.get_boxes(fname)
dpgen.auto_test.lib.vasp.get_energies(fname)
dpgen.auto_test.lib.vasp.get_nev(fname)
dpgen.auto_test.lib.vasp.get_poscar_natoms(fname)
dpgen.auto_test.lib.vasp.get_poscar_types(fname)
dpgen.auto_test.lib.vasp.get_stress(fname)
```

```

dpgen.auto_test.lib.vasp.make_kspacing_kpoints(poscar, kspacing, kgamma)
dpgen.auto_test.lib.vasp.make_vasp_kpoints(kpoints, kgamma=False)
dpgen.auto_test.lib.vasp.make_vasp_kpoints_from_incar(work_dir, jdata)
dpgen.auto_test.lib.vasp.make_vasp_phonon_incar(ecut, ediff, npar, kpar, kspacing=0.5, kgamma=True,
                                                ismear=1, sigma=0.2)

dpgen.auto_test.lib.vasp.make_vasp_relax_incar(ecut, ediff, relax_ion, relax_shape, relax_volume,
                                                npar, kpar, kspacing=0.5, kgamma=True, ismear=1,
                                                sigma=0.22)

dpgen.auto_test.lib.vasp.make_vasp_static_incar(ecut, ediff, npar, kpar, kspacing=0.5, kgamma=True,
                                                ismear=1, sigma=0.2)

dpgen.auto_test.lib.vasp.perturb_xz(poscar_in, poscar_out, pert=0.01)

dpgen.auto_test.lib.vasp.poscar_natoms(poscar_in)

dpgen.auto_test.lib.vasp.poscar_scale(poscar_in, poscar_out, scale)

dpgen.auto_test.lib.vasp.poscar_vol(poscar_in)

dpgen.auto_test.lib.vasp.reciprocal_box(box)

dpgen.auto_test.lib.vasp.regulate_poscar(poscar_in, poscar_out)

dpgen.auto_test.lib.vasp.sort_poscar(poscar_in, poscar_out, new_names)

```

Submodules

dpgen.auto_test.ABACUS module

```

class dpgen.auto_test.ABACUS(inter_parameter, path_to_poscar)
    Bases: Task

```

Methods

<i>backward_files</i> ([property_type])	Return backward files.
<i>compute</i> (output_dir)	Compute output of the task.
<i>forward_common_files</i> ([property_type])	Return forward common files.
<i>forward_files</i> ([property_type])	Return forward files.
<i>make_input_file</i> (output_dir, task_type, ...)	Prepare input files for a computational task For example, the VASP prepares INCAR.
<i>make_potential_files</i> (output_dir)	Prepare potential files for a computational task.

modify_input

backward_files(*property_type*='relaxation')

Return backward files.

compute(*output_dir*)

Compute output of the task. IMPORTANT: The output configuration should be converted and stored in a CONTCAR file.

Parameters**output_dir**

[str] The directory storing the input and output files.

Returns**result_dict: dict**

A dict that storing the result. For example: { “energy”: xxx, “force”: [xxx] }

Notes

The following files are generated: CONTCAR: output file

The output configuration is converted to CONTCAR and stored in the *output_dir*

forward_common_files(*property_type*=‘relaxation’)

Return forward common files.

forward_files(*property_type*=‘relaxation’)

Return forward files.

make_input_file(*output_dir*, *task_type*, *task_param*)

Prepare input files for a computational task For example, the VASP prepares INCAR. LAMMPS (including DeePMD, MEAM...) prepares in.lammps.

Parameters**output_dir**

[str] The directory storing the input files.

task_type

[str] Can be - “relaxation”: structure relaxation - “static”: static computation calculates the energy, force... of a structure

task_param

[dict] The parameters of the task. For example the VASP interaction can be provided with { “ediff”: 1e-6, “edifg”: 1e-5 }

make_potential_files(*output_dir*)

Prepare potential files for a computational task. For example, the VASP prepares POTCAR. DeePMD prepares frozen model(s). IMPORTANT: Interaction should be stored in *output_dir*/inter.json.

Parameters**output_dir**

[str] The directory storing the potential files.

Notes

The following files are generated:

inter.json: output file

The task information is stored in *output_dir*/inter.json

modify_input(*incar*, *x*, *y*)

dpgen.auto_test.EOS module

```
class dpgen.auto_test.EOS(parameter, inter_param=None)
```

Bases: *Property*

Methods

<code>compute(output_file, print_file, path_to_work)</code>	Postprocess the finished tasks to compute the property.
<code>make_confs(path_to_work, path_to_equi[, refine])</code>	Make configurations needed to compute the property.
<code>post_process(task_list)</code>	post_process the KPOINTS file in elastic.
<code>task_param()</code>	Return the parameter of each computational task, for example, {'ediffg': 1e-4}.
<code>task_type()</code>	Return the type of each computational task, for example, 'relaxation', 'static'....

make_confs(*path_to_work*, *path_to_equi*, *refine=False*)

Make configurations needed to compute the property. The tasks directory will be named as *path_to_work/task.xxxxxx* IMPORTANT: handel the case when the directory exists.

Parameters

`path_to_work`

[str] The path where the tasks for the property are located

`path_to_equi`

[str] -refine == False: The path to the directory that equilibrated the configuration.

-refine == True: The path to the directory that has property confs.

`refine`

[str] To refine existing property confs or generate property confs from a equilibrated conf

Returns

`task_list: list of str`

The list of task directories.

post_process(*task_list*)

post_process the KPOINTS file in elastic.

task_param()

Return the parameter of each computational task, for example, {'ediffg': 1e-4}.

task_type()

Return the type of each computational task, for example, 'relaxation', 'static'....

dpgen.auto_test.Elastic module

```
class dpgen.auto_test.Elastic.Elastic(parameter, inter_param=None)
```

Bases: *Property*

Methods

<code>compute(output_file, print_file, path_to_work)</code>	Postprocess the finished tasks to compute the property.
<code>make_confs(path_to_work, path_to_equi[, refine])</code>	Make configurations needed to compute the property.
<code>post_process(task_list)</code>	post_process the KPOINTS file in elastic.
<code>task_param()</code>	Return the parameter of each computational task, for example, {'edifffg': 1e-4}.
<code>task_type()</code>	Return the type of each computational task, for example, 'relaxation', 'static'....

`make_confs(path_to_work, path_to_equi, refine=False)`

Make configurations needed to compute the property. The tasks directory will be named as path_to_work/task.xxxxxx
IMPORTANT: handle the case when the directory exists.

Parameters

`path_to_work`

[str] The path where the tasks for the property are located

`path_to_equi`

[str] -refine == False: The path to the directory that equilibrated the configuration.

-refine == True: The path to the directory that has property confs.

`refine`

[str] To refine existing property confs or generate property confs from a equilibrated conf

Returns

`task_list: list of str`

The list of task directories.

`post_process(task_list)`

post_process the KPOINTS file in elastic.

`task_param()`

Return the parameter of each computational task, for example, {'edifffg': 1e-4}.

`task_type()`

Return the type of each computational task, for example, 'relaxation', 'static'....

dpgen.auto_test.Gamma module

```
class dpgen.auto_test.Gamma(parameter, inter_param=None)
```

Bases: *Property*

Calculation of common gamma lines for bcc and fcc.

Methods

<code>compute(output_file, print_file, path_to_work)</code>	Postprocess the finished tasks to compute the property.
<code>make_confs(path_to_work, path_to_equi[, refine])</code>	Make configurations needed to compute the property.
<code>post_process(task_list)</code>	post_process the KPOINTS file in elastic.
<code>task_param()</code>	Return the parameter of each computational task, for example, {'ediffg': 1e-4}.
<code>task_type()</code>	Return the type of each computational task, for example, 'relaxation', 'static'....

centralize_slab return_direction

```
static centralize_slab(slab) → None
```

```
make_confs(path_to_work, path_to_equi, refine=False)
```

Make configurations needed to compute the property. The tasks directory will be named as path_to_work/task.xxxxxx IMPORTANT: handle the case when the directory exists.

Parameters

`path_to_work`

[str] The path where the tasks for the property are located

`path_to_equi`

[str] -refine == False: The path to the directory that equilibrated the configuration.

-refine == True: The path to the directory that has property confs.

`refine`

[str] To refine existing property confs or generate property confs from a equilibrated conf

Returns

`task_list: list of str`

The list of task directories.

```
post_process(task_list)
```

post_process the KPOINTS file in elastic.

```
return_direction()
```

```
task_param()
```

Return the parameter of each computational task, for example, {'ediffg': 1e-4}.

```
task_type()
```

Return the type of each computational task, for example, 'relaxation', 'static'....

dpgen.auto_test.Interstitial module

```
class dpgen.auto_test.Interstitial.Interstitial(parameter, inter_param=None)
```

Bases: *Property*

Methods

<code>compute(output_file, print_file, path_to_work)</code>	Postprocess the finished tasks to compute the property.
<code>make_confs(path_to_work, path_to_equi[, refine])</code>	Make configurations needed to compute the property.
<code>post_process(task_list)</code>	post_process the KPOINTS file in elastic.
<code>task_param()</code>	Return the parameter of each computational task, for example, {'ediffg': 1e-4}.
<code>task_type()</code>	Return the type of each computational task, for example, 'relaxation', 'static'....

make_confs(*path_to_work*, *path_to_equi*, *refine=False*)

Make configurations needed to compute the property. The tasks directory will be named as *path_to_work/task.xxxxxx* IMPORTANT: handel the case when the directory exists.

Parameters**path_to_work**

[str] The path where the tasks for the property are located

path_to_equi

[str] -refine == False: The path to the directory that equilibrated the configuration.

-refine == True: The path to the directory that has property confs.

refine

[str] To refine existing property confs or generate property confs from a equilibrated conf

Returns**task_list: list of str**

The list of task directories.

post_process(*task_list*)

post_process the KPOINTS file in elastic.

task_param()

Return the parameter of each computational task, for example, {'ediffg': 1e-4}.

task_type()

Return the type of each computational task, for example, 'relaxation', 'static'....

dpgen.auto_test.Lammps module

```
class dpgen.auto_test.Lammps.Lammps(inter_parameter, path_to_poscar)
```

Bases: *Task*

Methods

<code>backward_files([property_type])</code>	Return backward files.
<code>compute(output_dir)</code>	Compute output of the task.
<code>forward_common_files([property_type])</code>	Return forward common files.
<code>forward_files([property_type])</code>	Return forward files.
<code>make_input_file(output_dir, task_type, ...)</code>	Prepare input files for a computational task For example, the VASP prepares INCAR.
<code>make_potential_files(output_dir)</code>	Prepare potential files for a computational task.

set_inter_type_func
set_model_param

`backward_files(property_type='relaxation')`

Return backward files.

`compute(output_dir)`

Compute output of the task. IMPORTANT: The output configuration should be converted and stored in a CONTCAR file.

Parameters

`output_dir`

[str] The directory storing the input and output files.

Returns

`result_dict: dict`

A dict that storing the result. For example: { “energy”: xxx, “force”: [xxx] }

Notes

The following files are generated: CONTCAR: output file

The output configuration is converted to CONTCAR and stored in the *output_dir*

`forward_common_files(property_type='relaxation')`

Return forward common files.

`forward_files(property_type='relaxation')`

Return forward files.

`make_input_file(output_dir, task_type, task_param)`

Prepare input files for a computational task For example, the VASP prepares INCAR. LAMMPS (including DeePMD, MEAM...) prepares in.lammps.

Parameters

`output_dir`

[str] The directory storing the input files.

`task_type`

[str] Can be - “relaxation”: structure relaxation - “static”: static computation calculates the energy, force... of a strcture

`task_param`

[dict] The parameters of the task. For example the VASP interaction can be provided with { “ediff”: 1e-6, “edifffg”: 1e-5 }

make_potential_files(*output_dir*)

Prepare potential files for a computational task. For example, the VASP prepares POTCAR. DeePMD prepares frozen model(s). IMPORTANT: Interaction should be stored in *output_dir/inter.json*.

Parameters**output_dir**

[str] The directory storing the potential files.

Notes

The following files are generated:

inter.json: output file

The task information is stored in *output_dir/inter.json*

set_inter_type_func()**set_model_param()****dpgen.auto_test.Property module****class dpgen.auto_test.Property.Property(*parameter*)**

Bases: ABC

Attributes**task_param**

Return the parameter of each computational task, for example, {'ediffg': 1e-4}.

task_type

Return the type of each computational task, for example, 'relaxation', 'static'....

Methods

compute(<i>output_file</i>, <i>print_file</i>, <i>path_to_work</i>)	Postprocess the finished tasks to compute the property.
make_confs(<i>path_to_work</i>, <i>path_to_equi</i>[, <i>refine</i>=False])	Make configurations needed to compute the property.
post_process(<i>task_list</i>)	post_process the KPOINTS file in elastic.

compute(*output_file*, *print_file*, *path_to_work*)

Postprocess the finished tasks to compute the property. Output the result to a json database.

Parameters**output_file:**

The file to output the property in json format

print_file:

The file to output the property in txt format

path_to_work:

The working directory where the computational tasks locate.

abstract make_confs(*path_to_work*, *path_to_equi*, *refine*=False)

Make configurations needed to compute the property. The tasks directory will be named as *path_to_work/task.xxxxxx* IMPORTANT: handle the case when the directory exists.

Parameters**path_to_work**

[str] The path where the tasks for the property are located

path_to_equi
 [str] -refine == False: The path to the directory that equilibrated the configuration.
 -refine == True: The path to the directory that has property confs.

refine
 [str] To refine existing property confs or generate property confs from a equilibrated conf

Returns

task_list: list of str
 The list of task directories.

abstract post_process(task_list)
 post_process the KPOINTS file in elastic.

abstract property task_param
 Return the parameter of each computational task, for example, {'ediffg': 1e-4}.

abstract property task_type
 Return the type of each computational task, for example, 'relaxation', 'static'....

dpgen.auto_test.Surface module

class dpgen.auto_test.Surface.Surface(parameter, inter_param=None)
 Bases: *Property*

Methods

<code>compute(output_file, print_file, path_to_work)</code>	Postprocess the finished tasks to compute the property.
<code>make_confs(path_to_work, path_to_equi[, refine])</code>	Make configurations needed to compute the property.
<code>post_process(task_list)</code>	post_process the KPOINTS file in elastic.
<code>task_param()</code>	Return the parameter of each computational task, for example, {'ediffg': 1e-4}.
<code>task_type()</code>	Return the type of each computational task, for example, 'relaxation', 'static'....

make_confs(path_to_work, path_to_equi, refine=False)

Make configurations needed to compute the property. The tasks directory will be named as path_to_work/task.xxxxxx IMPORTANT: handel the case when the directory exists.

Parameters

path_to_work

[str] The path where the tasks for the property are located

path_to_equi

[str] -refine == False: The path to the directory that equilibrated the configuration.

-refine == True: The path to the directory that has property confs.

refine

[str] To refine existing property confs or generate property confs from a equilibrated conf

Returns

task_list: list of str

The list of task directories.

```
post_process(task_list)
    post_process the KPOINTS file in elastic.

task_param()
    Return the parameter of each computational task, for example, {'edifffg': 1e-4}.

task_type()
    Return the type of each computational task, for example, 'relaxation', 'static'....
```

dpgen.auto_test.Task module

```
class dpgen.auto_test.Task(inter_parameter, path_to_poscar)
```

Bases: ABC

Attributes

backward_files

Return backward files.

forward_common_files

Return forward common files.

forward_files

Return forward files.

Methods

<code>compute(output_dir)</code>	Compute output of the task.
<code>make_input_file(output_dir, task_type, ...)</code>	Prepare input files for a computational task For example, the VASP prepares INCAR.
<code>make_potential_files(output_dir)</code>	Prepare potential files for a computational task.

abstract property backward_files

Return backward files.

abstract compute(output_dir)

Compute output of the task. IMPORTANT: The output configuration should be converted and stored in a CONTCAR file.

Parameters

output_dir

[str] The directory storing the input and output files.

Returns

result_dict: dict

A dict that storing the result. For example: { "energy": xxx, "force": [xxx] }

Notes

The following files are generated: CONTCAR: output file

The output configuration is converted to CONTCAR and stored in the *output_dir*

abstract property forward_common_files

Return forward common files.

abstract property forward_files

Return forward files.

abstract make_input_file(*output_dir*, *task_type*, *task_param*)

Prepare input files for a computational task For example, the VASP prepares INCAR. LAMMPS (including DeePMD, MEAM...) prepares in.lammps.

Parameters

output_dir

[str] The directory storing the input files.

task_type

[str] Can be - “relaxation”: structure relaxation - “static”: static computation calculates the energy, force... of a structure

task_param

[dict] The parameters of the task. For example the VASP interaction can be provided with { “ediff”: 1e-6, “ediffg”: 1e-5 }

abstract make_potential_files(*output_dir*)

Prepare potential files for a computational task. For example, the VASP prepares POTCAR. DeePMD prepares frozen model(s). IMPORTANT: Interaction should be stored in *output_dir*/inter.json.

Parameters

output_dir

[str] The directory storing the potential files.

Notes

The following files are generated:

inter.json: output file

The task information is stored in *output_dir*/inter.json

dpgen.auto_test.VASP module

class dpgen.auto_test.VASP.VASP(*inter_parameter*, *path_to_poscar*)

Bases: *Task*

Methods

<i>backward_files</i> ([<i>property_type</i>])	Return backward files.
<i>compute</i> (<i>output_dir</i>)	Compute output of the task.
<i>forward_common_files</i> ([<i>property_type</i>])	Return forward common files.
<i>forward_files</i> ([<i>property_type</i>])	Return forward files.
<i>make_input_file</i> (<i>output_dir</i> , <i>task_type</i> , ...)	Prepare input files for a computational task For example, the VASP prepares INCAR.
<i>make_potential_files</i> (<i>output_dir</i>)	Prepare potential files for a computational task.

backward_files(*property_type*='relaxation')

Return backward files.

compute(*output_dir*)

Compute output of the task. IMPORTANT: The output configuration should be converted and stored in a CONTCAR file.

Parameters

output_dir

[str] The directory storing the input and output files.

Returns

result_dict: dict

A dict that storing the result. For example: { "energy": xxx, "force": [xxx] }

Notes

The following files are generated: CONTCAR: output file

The output configuration is converted to CONTCAR and stored in the *output_dir*

forward_common_files(*property_type*='relaxation')

Return forward common files.

forward_files(*property_type*='relaxation')

Return forward files.

make_input_file(*output_dir*, *task_type*, *task_param*)

Prepare input files for a computational task For example, the VASP prepares INCAR. LAMMPS (including DeePMD, MEAM...) prepares in.lammps.

Parameters

output_dir

[str] The directory storing the input files.

task_type

[str] Can be - "relaxation": structure relaxation - "static": static computation calculates the energy, force... of a strcture

task_param

[dict] The parameters of the task. For example the VASP interaction can be provided with { "ediff": 1e-6, "edifgg": 1e-5 }

make_potential_files(*output_dir*)

Prepare potential files for a computational task. For example, the VASP prepares POTCAR. DeePMD prepares frozen model(s). IMPORTANT: Interaction should be stored in *output_dir*/inter.json.

Parameters

output_dir

[str] The directory storing the potential files.

Notes

The following files are generated:

inter.json: output file

The task information is stored in *output_dir*/inter.json

dpgen.auto_test.Vacancy module

`class dpgen.auto_test.Vacancy(parameter, inter_param=None)`

Bases: *Property*

Methods

<code>compute(output_file, print_file, path_to_work)</code>	Postprocess the finished tasks to compute the property.
<code>make_confs(path_to_work, path_to_equi[, refine])</code>	Make configurations needed to compute the property.
<code>post_process(task_list)</code>	post_process the KPOINTS file in elastic.
<code>task_param()</code>	Return the parameter of each computational task, for example, {'ediffg': 1e-4}.
<code>task_type()</code>	Return the type of each computational task, for example, 'relaxation', 'static'....

`make_confs(path_to_work, path_to_equi, refine=False)`

Make configurations needed to compute the property. The tasks directory will be named as path_to_work/task.xxxxxx
IMPORTANT: handel the case when the directory exists.

Parameters

`path_to_work`

[str] The path where the tasks for the property are located

`path_to_equi`

[str] -refine == False: The path to the directory that equilibrated the configuration.
-refine == True: The path to the directory that has property confs.

`refine`

[str] To refine existing property confs or generate property confs from a equilibrated conf

Returns

`task_list: list of str`

The list of task directories.

`post_process(task_list)`

post_process the KPOINTS file in elastic.

`task_param()`

Return the parameter of each computational task, for example, {'ediffg': 1e-4}.

`task_type()`

Return the type of each computational task, for example, 'relaxation', 'static'....

dpgen.auto_test.calculator module

`dpgen.auto_test.calculator.make_calculator(inter_parameter, path_to_poscar)`

Make an instance of Task.

dpgen.auto_test.common_equi module

```
dpgen.auto_test.common_equi.make_equi(confs, inter_param, relax_param)  
dpgen.auto_test.common_equi.post_equi(confs, inter_param)  
dpgen.auto_test.common_equi.run_equi(confs, inter_param, mdata)
```

dpgen.auto_test.common_prop module

```
dpgen.auto_test.common_prop.make_property(confs, inter_param, property_list)  
dpgen.auto_test.common_prop.make_property_instance(parameters, inter_param)  
    Make an instance of Property.  
dpgen.auto_test.common_prop.post_property(confs, inter_param, property_list)  
dpgen.auto_test.common_prop.run_property(confs, inter_param, property_list, mdata)  
dpgen.auto_test.common_prop.worker(work_path, all_task, forward_common_files, forward_files,  
                                backward_files, mdata, inter_type)
```

dpgen.auto_test.gen_confs module

```
dpgen.auto_test.gen_confs.gen_alloy(eles, key)  
dpgen.auto_test.gen_confs.gen_ele_std(ele_name, ctype)  
dpgen.auto_test.gen_confs.gen_element(ele_name, key)  
dpgen.auto_test.gen_confs.gen_element_std(ele_name)  
dpgen.auto_test.gen_confs.make_path_mp(ii)  
dpgen.auto_test.gen_confs.test_fit(struct, data)
```

dpgen.auto_test.mpdb module

```
dpgen.auto_test.mpdb.check_apikey()  
dpgen.auto_test.mpdb.get_structure(mp_id)
```

dpgen.auto_test.refine module

```
dpgen.auto_test.refine.make_refine(init_from_suffix, output_suffix, path_to_work)
```

dpgen.auto_test.reproduce module

```
dpgen.auto_test.reproduce.make_repro(inter_param, init_data_path, init_from_suffix, path_to_work,  
    reprod_last_frame=True)
```

```
dpgen.auto_test.reproduce.post_repro(init_data_path, init_from_suffix, all_tasks, ptr_data,  
    reprod_last_frame=True)
```

dpgen.auto_test.run module

```
dpgen.auto_test.run.gen_test(args)
```

```
dpgen.auto_test.run.run_task(step, param_file, machine_file=None)
```

dpgen.collect package**Submodules****dpgen.collect.collect module**

```
dpgen.collect.collect.collect_data(target_folder, param_file, output, verbose=True, shuffle=True,  
    merge=True)
```

```
dpgen.collect.collect.gen_collect(args)
```

dpgen.data package**Subpackages****dpgen.data.tools package****Submodules****dpgen.data.tools.bcc module**

```
dpgen.data.tools.bcc.gen_box()
```

```
dpgen.data.tools.bcc.numb_atoms()
```

```
dpgen.data.tools.bcc.poscar_unit(latt)
```

dpgen.data.tools.cessp2force_lin module

```
dpgen.data.tools.cessp2force_lin.Parser()  
dpgen.data.tools.cessp2force_lin.get_outcar_files(directory, recursive)  
dpgen.data.tools.cessp2force_lin.process_outcar_file_v5_dev(outcars, data, numbers, types,  
                                                               max_types, elements=None,  
                                                               windex=None, fout='potfit.configs')  
dpgen.data.tools.cessp2force_lin.scan_outcar_file(file_handle)  
dpgen.data.tools.cessp2force_lin.uniq(seq)
```

dpgen.data.tools.create_random_disturb module

```
dpgen.data.tools.create_random_disturb.RandomDisturbParser()  
dpgen.data.tools.create_random_disturb.create_disturbs_abacus_dev(fin, nfile, dmax=1.0,  
                                                               etmax=0.1, ofmt='abacus',  
                                                               dstyle='uniform',  
                                                               write_d=False, diag=0)  
dpgen.data.tools.create_random_disturb.create_disturbs_ase(fin, nfile, dmax=1.0, ofmt='lmp',  
                                                               dstyle='uniform', write_d=False)  
dpgen.data.tools.create_random_disturb.create_disturbs_ase_dev(fin, nfile, dmax=1.0, etmax=0.1,  
                                                               ofmt='lmp', dstyle='uniform',  
                                                               write_d=False, diag=0)  
dpgen.data.tools.create_random_disturb.create_disturbs_atomsk(fin, nfile, dmax=1.0, ofmt='lmp')  
dpgen.data.tools.create_random_disturb.create_random_alloys(fin, alloy_dist, ifmt='vasp',  
                                                               ofmt='vasp')
```

In fact, atomsk also gives us the convenient tool to do this.

```
dpgen.data.tools.create_random_disturb.gen_random_disturb(dmax, a, b, dstyle='uniform')  
dpgen.data.tools.create_random_disturb.gen_random_emat(etmax, diag=0)  
dpgen.data.tools.create_random_disturb.random_range(a, b, ndata=1)
```

dpgen.data.tools.diamond module

```
dpgen.data.tools.diamond.gen_box()  
dpgen.data.tools.diamond.numb_atoms()  
dpgen.data.tools.diamond.poscar_unit(latt)
```

dpgen.data.tools.fcc module

```
dpgen.data.tools.fcc.gen_box()  
dpgen.data.tools.fcc.numb_atoms()  
dpgen.data.tools.fcc.poscar_unit(latt)
```

dpgen.data.tools.hcp module

```
dpgen.data.tools.hcp.gen_box()  
dpgen.data.tools.hcp.numb_atoms()  
dpgen.data.tools.hcp.poscar_unit(latt)
```

dpgen.data.tools.io_lammps module

ASE Atoms convert to LAMMPS configuration Some functions are adapted from ASE lammpsrun.py.

```
dpgen.data.tools.io_lammps.ase2lammpsdata(atoms, typeids=None, fout='out.lmp')
```

```
dpgen.data.tools.io_lammps.car2dir(v, Ainv)
```

Cartesian to direct coordinates.

```
dpgen.data.tools.io_lammps.convert_cell(ase_cell)
```

Convert a parallel piped (forming right hand basis) to lower triangular matrix LAMMPS can accept. This function transposes cell matrix so the bases are column vectors.

```
dpgen.data.tools.io_lammps.convert_forces(forces0, cell0, cell_new)
```

```
dpgen.data.tools.io_lammps.convert_positions(pos0, cell0, cell_new, direct=False)
```

```
dpgen.data.tools.io_lammps.convert_stress(s6_0, cell0, cell_new)
```

```
dpgen.data.tools.io_lammps.dir2car(v, A)
```

Direct to cartesian coordinates.

```
dpgen.data.tools.io_lammps.get_atoms_ntypes(atoms)
```

```
dpgen.data.tools.io_lammps.get_typeid(typeids, csymbol)
```

```
dpgen.data.tools.io_lammps.is_upper_triangular(mat)
```

Test if 3x3 matrix is upper triangular LAMMPS has a rule for cell matrix definition.

```
dpgen.data.tools.io_lammps.set_atoms_typeids(atoms)
```

```
dpgen.data.tools.io_lammps.set_atoms_typeids_with_atomic_numbers(atoms)
```

```
dpgen.data.tools.io_lammps.stress6_to_stress9(s6)
```

```
dpgen.data.tools.io_lammps.stress9_to_stress6(s9)
```

[dpgen.data.tools.ovito_file_convert module](#)

[dpgen.data.tools.poscar_copy module](#)

[dpgen.data.tools.sc module](#)

`dpgen.data.tools.sc.gen_box()`

`dpgen.data.tools.sc.numb_atoms()`

`dpgen.data.tools.sc.poscar_unit(latt)`

Submodules

[dpgen.data.arginfo module](#)

`dpgen.data.arginfo.init_bulk_abacus_args() → list[Argument]`

`dpgen.data.arginfo.init_bulk_jdata_arginfo() → Argument`

Generate arginfo for dpgen init_bulk jdata.

Returns

Argument

`dpgen init_bulk jdata arginfo`

`dpgen.data.arginfo.init_bulk_mdata_arginfo() → Argument`

Generate arginfo for dpgen init_bulk mdata.

Returns

Argument

`arginfo`

`dpgen.data.arginfo.init_bulk_variant_type_args() → list[Variant]`

`dpgen.data.arginfo.init_bulk_vasp_args() → list[Argument]`

`dpgen.data.arginfo.init_reaction_jdata_arginfo() → Argument`

Generate arginfo for dpgen init_reaction jdata.

Returns

Argument

`dpgen init_reaction jdata arginfo`

`dpgen.data.arginfo.init_reaction_mdata_arginfo() → Argument`

Generate arginfo for dpgen init_reaction mdata.

Returns

Argument

`arginfo`

`dpgen.data.arginfo.init_surf_jdata_arginfo() → Argument`

Generate arginfo for dpgen init_surf jdata.

Returns

Argument

`dpgen init_surf jdata arginfo`

`dpgen.data.arginfo.init_surf_mdata_arginfo()` → Argument

Generate arginfo for dpgen init_surf mdata.

Returns

Argument

arginfo

dpgen.data.gen module

`dpgen.data.gen.class_cell_type(jdata)`

`dpgen.data.gen.coll_abacus_md(jdata)`

`dpgen.data.gen.coll_vasp_md(jdata)`

`dpgen.data.gen.create_path(path, back=False)`

`dpgen.data.gen.gen_init_bulk(args)`

`dpgen.data.gen.make_abacus_md(jdata, mdata)`

`dpgen.data.gen.make_abacus_relax(jdata, mdata)`

`dpgen.data.gen.make_combines(dim, natoms)`

`dpgen.data.gen.make_scale(jdata)`

`dpgen.data.gen.make_scale_ABACUS(jdata)`

`dpgen.data.gen.make_super_cell(jdata)`

`dpgen.data.gen.make_super_cell_ABACUS(jdata, stru_data)`

`dpgen.data.gen.make_super_cell_STRU(jdata)`

`dpgen.data.gen.make_super_cell_poscar(jdata)`

`dpgen.data.gen.make_unit_cell(jdata)`

`dpgen.data.gen.make_unit_cell_ABACUS(jdata)`

`dpgen.data.gen.make_vasp_md(jdata, mdata)`

`dpgen.data.gen.make_vasp_relax(jdata, mdata)`

`dpgen.data.gen.out_dir_name(jdata)`

`dpgen.data.gen.pert_scaled(jdata)`

`dpgen.data.gen.place_element(jdata)`

`dpgen.data.gen.place_element_ABACUS(jdata, supercell_stru)`

`dpgen.data.gen.poscar_ele(poscar_in, poscar_out, eles, natoms)`

`dpgen.data.gen.poscar_natoms(lines)`

`dpgen.data.gen.poscar_scale(poscar_in, poscar_out, scale)`

```
dpigen.data.gen.poscar_scale_abacus(poscar_in, poscar_out, scale, jdata)
dpigen.data.gen.poscar_scale_cartesian(str_in, scale)
dpigen.data.gen.poscar_scale_direct(str_in, scale)
dpigen.data.gen.poscar_shuffle(poscar_in, poscar_out)
dpigen.data.gen.replace(file_name, pattern, subst)
dpigen.data.gen.run_abacus_md(jdata, mdata)
dpigen.data.gen.run_abacus_relax(jdata, mdata)
dpigen.data.gen.run_vasp_md(jdata, mdata)
dpigen.data.gen.run_vasp_relax(jdata, mdata)
dpigen.data.gen.shuffle_stru_data(supercell_stru)
dpigen.data.gen.stru_ele(supercell_stru, stru_out, eles, natoms, jdata, path_work)
```

dpigen.data.reaction module

input: trajectory 00: ReaxFF MD (lammps) 01: build dataset (mddatasetbuilder) 02: fp (gaussian) 03: convert to
deepmd data output: data.

```
dpigen.data.reaction.convert_data(jdata)
dpigen.data.reaction.gen_init_reaction(args)
dpigen.data.reaction.link_fp_input()
dpigen.data.reaction.link_reaxff(jdata)
dpigen.data.reaction.link_trj(jdata)
    Link lammpstrj.
dpigen.data.reaction.make_lmp(jdata)
dpigen.data.reaction.run_build_dataset(jdata, mdata, log_file='build_log')
dpigen.data.reaction.run_fp(jdata, mdata, log_file='output', forward_common_files=[])
dpigen.data.reaction.run_reaxff(jdata, mdata, log_file='reaxff_log')
```

dpigen.data.surf module

```
dpigen.data.surf.class_cell_type(jdata)
dpigen.data.surf.create_path(path)
dpigen.data.surf.gen_init_surf(args)
dpigen.data.surf.make_combines(dim, natoms)
dpigen.data.surf.make_scale(jdata)
```

```

dpigen.data.surf.make_super_cell_pymatgen(jdata)
dpigen.data.surf.make_unit_cell(jdata)
dpigen.data.surf.make_vasp_relax(jdata)
dpigen.data.surf.out_dir_name(jdata)
dpigen.data.surf.pert_scaled(jdata)
dpigen.data.surf.place_element(jdata)
dpigen.data.surf.poscar_ele(poscar_in, poscar_out, eles, natoms)
dpigen.data.surf.poscar_elong(poscar_in, poscar_out, elong, shift_center=True)
dpigen.data.surf.poscar_natoms(poscar_in)
dpigen.data.surf.poscar_scale(poscar_in, poscar_out, scale)
dpigen.data.surf.poscar_scale_cartesian(str_in, scale)
dpigen.data.surf.poscar_scale_direct(str_in, scale)
dpigen.data.surf.poscar_shuffle(poscar_in, poscar_out)
dpigen.data.surf.replace(file_name, pattern, subst)
dpigen.data.surf.run_vasp_relax(jdata, mdata)

```

dpigen.database package

class dpigen.database.DPPotcar(symbols=None, functional='PBE', pp_file=None, pp_lists=None)

Bases: MSONable

Methods

as_dict()	A JSON serializable dict representation of an object.
from_dict(d)	param d Dict representation.
to_json()	Returns a json string representation of the MSONable object.
unsafe_hash()	Returns an hash of the current object.
validate_monty_v1(_MSONable__input_value)	Pydantic validator with correct signature for pydantic v1.x
validate_monty_v2(_MSONable__input_value, _)	Pydantic validator with correct signature for pydantic v2.x

from_file
write_file

as_dict()

A JSON serializable dict representation of an object.

classmethod from_dict(d)**Parameters**

d – Dict representation.

Returns

MSONable class.

classmethod from_file(filename)**write_file(filename)**

```
class dpigen.database.Entry(composition, calculator, inputs, data, entry_id=None, attribute=None,
                             tag=None)
```

Bases: **MSONable**

An lightweight Entry object containing key computed data for storing purpose.

Parameters**composition**

[Composition] Composition of the entry. For flexibility, this can take the form of all the typical input taken by a Composition, including a {symbol: amt} dict, a string formula, and others.

inputs

[dict] An dict of parameters associated with the entry. Defaults to None.

data

[dict] An dict of any additional data associated with the entry. Defaults to None.

entry_id

[obj] An optional id to uniquely identify the entry.

attribute

Optional attribute of the entry. This can be used to specify that the entry is a newly found compound, or to specify a particular label for the entry, or else ... Used for further analysis and plotting purposes. An attribute can be anything but must be MSONable.

Attributes**number_element****Methods****as_dict()**

A JSON serializable dict representation of an object.

from_dict(d)**param d**

Dict representation.

to_json()

Returns a json string representation of the MSONable object.

unsafe_hash()

Returns an hash of the current object.

validate_monty_v1(_MSONable__input_value)

Pydantic validator with correct signature for pydantic v1.x

validate_monty_v2(_MSONable__input_value, _)

Pydantic validator with correct signature for pydantic v2.x

as_dict()

A JSON serializable dict representation of an object.

```
classmethod from_dict(d)
Parameters
d – Dict representation.
Returns
MSONable class.

property number_element

class dpgen.database.VaspInput(incar, poscar, potcar, kpoints=None, optional_files=None, **kwargs)
Bases: dict, MSONable
Class to contain a set of vasp input objects corresponding to a run.

Args:
    incar: Incar object. kpoints: Kpoints object. poscar: Poscar object. potcar: Potcar object. optional_files: Other input files supplied as a dict of {
        filename: object}. The object should follow standard pymatgen conventions in implementing a as_dict() and from_dict method.
```

Methods

<code>as_dict()</code>	A JSON serializable dict representation of an object.
<code>clear()</code>	
<code>copy()</code>	
<code>from_dict(d)</code>	<p>param d Dict representation.</p>
<code>from_directory(input_dir[, optional_files])</code>	Read in a set of VASP input from a directory.
<code>fromkeys(iterable[, value])</code>	Create a new dictionary with keys from iterable and values set to value.
<code>get(key[, default])</code>	Return the value for key if key is in the dictionary, else default.
<code>items()</code>	
<code>keys()</code>	
<code>pop(key[, default])</code>	If the key is not found, return the default if given; otherwise, raise a <code>KeyError</code> .
<code>popitem()</code>	Remove and return a (key, value) pair as a 2-tuple.
<code>setdefault(key[, default])</code>	Insert key with a value of default if key is not in the dictionary.
<code>to_json()</code>	Returns a json string representation of the MSONable object.
<code>unsafe_hash()</code>	Returns an hash of the current object.
<code>update([E,]**F)</code>	If E is present and has a <code>.keys()</code> method, then does: for k in E: D[k] = E[k] If E is present and lacks a <code>.keys()</code> method, then does: for k, v in E: D[k] = v In either case, this is followed by: for k in F: D[k] = F[k]
<code>validate_monty_v1(_MSONable__input_value)</code>	Pydantic validator with correct signature for pydantic v1.x
<code>validate_monty_v2(_MSONable__input_value, _)</code>	Pydantic validator with correct signature for pydantic v2.x
<code>values()</code>	
<code>write_input([output_dir, ...])</code>	Write VASP input to a directory.

as_dict()

A JSON serializable dict representation of an object.

classmethod from_dict(d)**Parameters**

`d` – Dict representation.

Returns

MSONable class.

static from_directory(input_dir, optional_files=None)

Read in a set of VASP input from a directory. Note that only the standard INCAR, POSCAR, POTCAR and KPOINTS files are read unless optional_filenames is specified.

Parameters

```
input_dir
    [str] Directory to read VASP input from.
optional_files
    [dict] Optional files to read in as well as a dict of {filename: Object type}. Object
    type must have a static method from_file.
write_input(output_dir='.', make_dir_if_not_present=True)
    Write VASP input to a directory.
Parameters
output_dir
    [str] Directory to write to. Defaults to current directory (“.”).
make_dir_if_not_present
    [bool] Create the directory if not present. Defaults to True.
```

Submodules

[dpgen.database.entry module](#)

```
class dpgen.database.entry.Entry(composition, calculator, inputs, data, entry_id=None, attribute=None,
tag=None)
```

Bases: `MSONable`

An lightweight Entry object containing key computed data for storing purpose.

Parameters

composition

[Composition] Composition of the entry. For flexibility, this can take the form of all the typical input taken by a Composition, including a {symbol: amt} dict, a string formula, and others.

inputs

[dict] An dict of parameters associated with the entry. Defaults to None.

data

[dict] An dict of any additional data associated with the entry. Defaults to None.

entry_id

[obj] An optional id to uniquely identify the entry.

attribute

Optional attribute of the entry. This can be used to specify that the entry is a newly found compound, or to specify a particular label for the entry, or else ... Used for further analysis and plotting purposes. An attribute can be anything but must be `MSONable`.

Attributes

number_element

Methods

<code>as_dict()</code>	A JSON serializable dict representation of an object.
<code>from_dict(d)</code>	<p>param d Dict representation.</p>
<code>to_json()</code>	Returns a json string representation of the MSONable object.
<code>unsafe_hash()</code>	Returns an hash of the current object.
<code>validate_monty_v1(_MSONable__input_value)</code>	Pydantic validator with correct signature for pydantic v1.x
<code>validate_monty_v2(_MSONable__input_value, _)</code>	Pydantic validator with correct signature for pydantic v2.x

as_dict()

A JSON serializable dict representation of an object.

classmethod from_dict(d)**Parameters**

d – Dict representation.

Returns

MSONable class.

property number_element**dpgen.database.run module**

```
dpgen.database.run.db_run(args)
dpgen.database.run.parsing_gaussian(path, output='dpgen_db.json')
dpgen.database.run.parsing_pwscf(path, output='dpgen_db.json')
dpgen.database.run.parsing_vasp(path, config_info_dict, skip_init, output='dpgen_db.json', id_prefix=None)
```

dpgen.database.vasp module

```
class dpgen.database.vasp.DPPotcar(symbols=None, functional='PBE', pp_file=None, pp_lists=None)
```

Bases: MSONable

Methods

<code>as_dict()</code>	A JSON serializable dict representation of an object.
<code>from_dict(d)</code>	<p>param d Dict representation.</p>
<code>to_json()</code>	Returns a json string representation of the MSONable object.
<code>unsafe_hash()</code>	Returns an hash of the current object.
<code>validate_monty_v1(_MSONable__input_value)</code>	Pydantic validator with correct signature for pydantic v1.x
<code>validate_monty_v2(_MSONable__input_value, _)</code>	Pydantic validator with correct signature for pydantic v2.x

<code>from_file</code>
<code>write_file</code>

`as_dict()`

A JSON serializable dict representation of an object.

`classmethod from_dict(d)`

Parameters

`d` – Dict representation.

Returns

MSONable class.

`classmethod from_file(filename)`

`write_file(filename)`

`class dpgen.database.vasp.VaspInput(incar, poscar, potcar, kpoints=None, optional_files=None, **kwargs)`

Bases: `dict, MSONable`

Class to contain a set of vaspy input objects corresponding to a run.

Args:

incar: Incar object. kpoints: Kpoints object. poscar: Poscar object. potcar: Potcar object. optional_files: Other input files supplied as a dict of { filename: object}. The object should follow standard pymatgen conventions in implementing a `as_dict()` and `from_dict` method.

Methods

<code>as_dict()</code>	A JSON serializable dict representation of an object.
<code>clear()</code>	
<code>copy()</code>	
<code>from_dict(d)</code>	<p>param d Dict representation.</p>
<code>from_directory(input_dir[, optional_files])</code>	Read in a set of VASP input from a directory.
<code>fromkeys(iterable[, value])</code>	Create a new dictionary with keys from iterable and values set to value.
<code>get(key[, default])</code>	Return the value for key if key is in the dictionary, else default.
<code>items()</code>	
<code>keys()</code>	
<code>pop(key[, default])</code>	If the key is not found, return the default if given; otherwise, raise a <code>KeyError</code> .
<code>popitem()</code>	Remove and return a (key, value) pair as a 2-tuple.
<code>setdefault(key[, default])</code>	Insert key with a value of default if key is not in the dictionary.
<code>to_json()</code>	Returns a json string representation of the MSONable object.
<code>unsafe_hash()</code>	Returns an hash of the current object.
<code>update([E,]**F)</code>	If E is present and has a <code>.keys()</code> method, then does: for k in E: D[k] = E[k] If E is present and lacks a <code>.keys()</code> method, then does: for k, v in E: D[k] = v In either case, this is followed by: for k in F: D[k] = F[k]
<code>validate_monty_v1(_MSONable__input_value)</code>	Pydantic validator with correct signature for pydantic v1.x
<code>validate_monty_v2(_MSONable__input_value, _)</code>	Pydantic validator with correct signature for pydantic v2.x
<code>values()</code>	
<code>write_input([output_dir, ...])</code>	Write VASP input to a directory.

`as_dict()`

A JSON serializable dict representation of an object.

`classmethod from_dict(d)`

Parameters

`d` – Dict representation.

Returns

MSONable class.

`static from_directory(input_dir, optional_files=None)`

Read in a set of VASP input from a directory. Note that only the standard INCAR, POSCAR, POTCAR and KPOINTS files are read unless optional_filenames is specified.

Parameters

```
input_dir
    [str] Directory to read VASP input from.
optional_files
    [dict] Optional files to read in as well as a dict of {filename: Object type}. Object
    type must have a static method from_file.

write_input(output_dir='.', make_dir_if_not_present=True)
    Write VASP input to a directory.

Parameters
    output_dir
        [str] Directory to write to. Defaults to current directory (“.”).
    make_dir_if_not_present
        [bool] Create the directory if not present. Defaults to True.
```

dpgen.dispatcher package

Submodules

dpgen.dispatcher.Dispatcher module

```
dpgen.dispatcher.Dispatcher.make_submission(mdata_machine, mdata_resources, commands, work_path,
                                              run_tasks, group_size, forward_common_files,
                                              forward_files, backward_files, outlog, errlog)
```

```
dpgen.dispatcher.Dispatcher.make_submission_compat(machine: dict, resources: dict, commands:
                                                       list[str], work_path: str, run_tasks: list[str],
                                                       group_size: int, forward_common_files: list[str],
                                                       forward_files: list[str], backward_files: list[str],
                                                       outlog: str = 'log', errlog: str = 'err', api_version:
                                                       str = '1.0') → None
```

Make submission with compatibility of both dispatcher API v0 and v1.

If *api_version* is less than 1.0, raise RuntimeError. If *api_version* is large than 1.0, use *make_submission*.

Parameters

- machine**
[dict] machine dict
- resources**
[dict] resource dict
- commands**
[list[str]] list of commands
- work_path**
[str] working directory
- run_tasks**
[list[str]] list of paths to running tasks
- group_size**
[int] group size
- forward_common_files**
[list[str]] forwarded common files shared for all tasks
- forward_files**
[list[str]] forwarded files for each task
- backward_files**
[list[str]] backwarded files for each task

outlog
[str, default=log] path to log from stdout
errlog
[str, default=err] path to log from stderr
api_version
[str, default=1.0] API version. 1.0 is required

`dpgen.dispatcher.Dispatcher.mdata_arginfo()` → list[Argument]

This method generates arginfo for a single mdata.

A submission requires the following keys: command, machine, and resources.

Returns

list[Argument]
arginfo

dpgen.generator package

Subpackages

dpgen.generator.lib package

Submodules

dpgen.generator.lib.abacus_scf module

`dpgen.generator.lib.abacus_scf.get_abacus_STRU(STRU, INPUT=None, n_ele=None)`
`dpgen.generator.lib.abacus_scf.get_abacus_input_parameters(INPUT)`
`dpgen.generator.lib.abacus_scf.get_additional_from_STRU(geometry_inlines, nele)`
`dpgen.generator.lib.abacus_scf.get_mass_from_STRU(geometry_inlines, atom_names)`
`dpgen.generator.lib.abacus_scf.get_natoms_from_stru(geometry_inlines)`
`dpgen.generator.lib.abacus_scf.make_abacus_scf_input(fp_params, extra_file_path='')`
`dpgen.generator.lib.abacus_scf.make_abacus_scf_kpt(fp_params)`
`dpgen.generator.lib.abacus_scf.make_abacus_scf_stru(sys_data, fp_pp_files, fp_orb_files=None, fp_dpks_descriptor=None, fp_params=None, type_map=None, pporb='')`
`dpgen.generator.lib.abacus_scf.make_kspacing_kpoints_stru(stru, kspacing)`
`dpgen.generator.lib.abacus_scf.make_supercell_abacus(from_struct, super_cell)`

dpgen.generator.lib.calypso_check_outcar module**dpgen.generator.lib.calypso_run_model_devi module****dpgen.generator.lib.calypso_run_opt module****dpgen.generator.lib.cp2k module**

```
dpgen.generator.lib.cp2k.ite rdict(d, out_list, flag=None, indent=0)
```

Doc

a recursive expansion of dictionary into cp2k input

K

current key

V

current value

D

current dictionary under expansion

Flag

used to record dictionary state. if flag is None,

it means we are in top level dict. flag is a string. :indent: intent for current section.

```
dpgen.generator.lib.cp2k.make_cp2k_input(sys_data, fp_params)
```

```
dpgen.generator.lib.cp2k.make_cp2k_input_from_external(sys_data, exinput_path)
```

```
dpgen.generator.lib.cp2k.make_cp2k_xyz(sys_data)
```

```
dpgen.generator.lib.cp2k.update_dict(old_d, update_d)
```

A method to recursive update dict :old_d: old dictionary :update_d: some update value written in dictionary form.

dpgen.generator.lib.cvasp module

```
dpgen.generator.lib.cvasp.runvasp(cmd, opt=False, max_errors=3, backup=False, auto_gamma=False,
auto_npar=False, edifg=-0.05)
```

Cmd example: cmd=['mpirun', '-np', '32', '-machinefile', 'hosts','vasp_std'].

dpgen.generator.lib.ele_temp module

```
class dpgen.generator.lib.ele_temp.NBandsEsti(test_list)
```

Bases: object

Methods

predict
save

predict(*target_dir*, *tolerance*=0.5)

save(*fname*)

dpgen.generator.lib.gaussian module

dpgen.generator.lib.gaussian.**detect_multiplicity**(*symbols*)

dpgen.generator.lib.gaussian.**make_gaussian_input**(*sys_data*, *fp_params*)

dpgen.generator.lib.gaussian.**take_cluster**(*old_conf_name*, *type_map*, *idx*, *jdata*)

dpgen.generator.lib.lammps module

dpgen.generator.lib.lammps.**get_all_dumped_forces**(*file_name*)

dpgen.generator.lib.lammps.**get_dumped_forces**(*file_name*)

dpgen.generator.lib.lammps.**make_lammps_input**(*ensemble*, *conf_file*, *graphs*, *nsteps*, *dt*, *neidelay*, *trj_freq*,
mass_map, *temp*, *jdata*, *tau_t*=0.1, *pres*=None,
tau_p=0.5, *pka_e*=None, *ele_temp_f*=None,
ele_temp_a=None, *max_seed*=1000000, *nopbc*=False,
deepmd_version='0.1', *nbeads*=None)

dpgen.generator.lib.make_calypso module

dpgen.generator.lib.make_calypso.**make_calypso_input**(*nameofatoms*, *numberofatoms*, *numberofformula*,
volume, *distanceofion*, *psoratio*, *popszie*,
maxstep, *icode*, *split*, *vsc*, *maxnumatom*,
ctrlrange, *pstress*, *fmax*)

dpgen.generator.lib.make_calypso.**write_model_devi_out**(*devi*, *fname*)

dpgen.generator.lib.parse_calypso module

dpgen.generator.lib.pwmat module

dpgen.generator.lib.pwmat.**input_upper**(*dinput*)

dpgen.generator.lib.pwmat.**make_pwmat_input_dict**(*node1*, *node2*, *atom_config*, *ecut*, *e_error*, *rho_error*,
icmix=None, *smearing*=None, *sigma*=None,
kspacing=0.5, *flag_symm*=None)

```
dpigen.generator.lib.pwmat.make_pwmat_input_user_dict(fp_params)
dpigen.generator.lib.pwmat.write_input_dict(input_dict)
```

dpigen.generator.lib.pwscf module

```
dpigen.generator.lib.pwscf.cvt_1frame(fin,fout)
dpigen.generator.lib.pwscf.get_atom_types(lines)
dpigen.generator.lib.pwscf.get_block(lines, keyword, skip=0)
dpigen.generator.lib.pwscf.get_cell(lines)
dpigen.generator.lib.pwscf.get_coords(lines)
dpigen.generator.lib.pwscf.get_energy(lines)
dpigen.generator.lib.pwscf.get_force(lines)
dpigen.generator.lib.pwscf.get_natoms(lines)
dpigen.generator.lib.pwscf.get_stress(lines, cells)
dpigen.generator.lib.pwscf.get_types(lines)
dpigen.generator.lib.pwscf.make_pwscf_01_runctrl_dict(sys_data, idict)
dpigen.generator.lib.pwscf.make_pwscf_input(sys_data, fp_pp_files, fp_params, user_input=True)
```

dpigen.generator.lib.run_calypso module

calypso as model devi engine: 1. gen_structures 2. analysis 3. model devi.

```
dpigen.generator.lib.run_calypso.analysis(iter_index, jdata, calypso_model_devi_path)
dpigen.generator.lib.run_calypso.gen_main(iter_index, jdata, mdata, caly_run_opt_list, gen_idx)
dpigen.generator.lib.run_calypso.gen_structures(iter_index, jdata, mdata, caly_run_path, current_idx,
                                               length_of_caly_runopt_list)
dpigen.generator.lib.run_calypso.run_calypso_model_devi(iter_index, jdata, mdata)
```

dpigen.generator.lib.siesta module

```
dpigen.generator.lib.siesta.make_siesta_input(sys_data, fp_pp_files, fp_params)
```

dpgen.generator.lib.utils module

```
dpgen.generator.lib.utils.cmd_append_log(cmd, log_file)
dpgen.generator.lib.utils.copy_file_list(file_list, from_path, to_path)
dpgen.generator.lib.utils.create_path(path)
dpgen.generator.lib.utils.log_iter(task, ii, jj)
dpgen.generator.lib.utils.log_task(message)
dpgen.generator.lib.utils.make_iter_name(iter_index)
dpgen.generator.lib.utils.record_iter(record, ii, jj)
dpgen.generator.lib.utils.repeat_to_length(string_to_expand, length)
dpgen.generator.lib.utils.replace(file_name, pattern, subst)
dpgen.generator.lib.utils.symlink_user_forward_files(mdata, task_type, work_path,
                                                    task_format=None)
```

Symlink user-defined forward_common_files Current path should be work_path, such as 00.train.

Parameters

mdata
[dict] machine parameters
task_type
[str] task_type, such as “train”
work_path
[str] work_path, such as “iter.000001/00.train”
task_format
[dict] formats of tasks

Returns

None

dpgen.generator.lib.vasp module

```
dpgen.generator.lib.vasp.incar_upper(dincar)
dpgen.generator.lib.vasp.make_vasp_incar_user_dict(fp_params)
dpgen.generator.lib.vasp.write_incar_dict(incar_dict)
```

Submodules**dpgen.generator.arginfo module**

```
dpgen.generator.arginfo.basic_args() → list[Argument]
dpgen.generator.arginfo.data_args() → list[Argument]
dpgen.generator.arginfo.fp_args() → list[Argument]
```

`dpgen.generator.arginfo.fp_style_abacus_args()` → list[Argument]

`dpgen.generator.arginfo.fp_style_amber_diff_args()` → list[Argument]

Arguments for FP style amber/diff.

Returns

`list[dargs.Argument]`

list of amber/diff fp style arguments

`dpgen.generator.arginfo.fp_style_cp2k_args()` → list[Argument]

`dpgen.generator.arginfo.fp_style_custom_args()` → list[Argument]

Arguments for FP style custom.

Returns

`list[dargs.Argument]`

list of custom fp style arguments

`dpgen.generator.arginfo.fp_style_gaussian_args()` → list[Argument]

Gaussian fp style arguments.

Returns

`list[dargs.Argument]`

list of Gaussian fp style arguments

`dpgen.generator.arginfo.fp_style_pwscf_args()` → list[Argument]

Arguments for FP style pwscf (Quantum Espresso).

Returns

`list[dargs.Argument]`

list of pwscf fp style arguments

`dpgen.generator.arginfo.fp_style_siesta_args()` → list[Argument]

`dpgen.generator.arginfo.fp_style_variant_type_args()` → Variant

`dpgen.generator.arginfo.fp_style_vasp_args()` → list[Argument]

`dpgen.generator.arginfo.model_devi_amber_args()` → list[Argument]

Amber engine arguments.

`dpgen.generator.arginfo.model_devi_args()` → list[Variant]

`dpgen.generator.arginfo.model_devi_jobs_args()` → list[Argument]

`dpgen.generator.arginfo.model_devi_jobs_rev_mat_args()` → Argument

`dpgen.generator.arginfo.model_devi_jobs_template_args()` → Argument

`dpgen.generator.arginfo.model_devi_lmp_args()` → list[Argument]

`dpgen.generator.arginfo.run_jdata_arginfo()` → Argument

Argument information for dpgen run mdata.

Returns

`Argument`

argument information

`dpgen.generator.arginfo.run_mdata_arginfo()` → Argument

Generate arginfo for dpgen run mdata.

Returns

`Argument`

arginfo

`dpgen.generator.arginfo.training_args()` → list[Argument]

Traning arguments.

Returns

`list[dargs.Argument]`

List of training arguments.

dpgen.generator.run module

init: data iter:

00.train 01.model_devi 02.vasp 03.data.

`dpgen.generator.run.check_bad_box(conf_name, criteria, fmt='lammps/dump')`

`dpgen.generator.run.check_cluster(conf_name, fp_cluster_vacuum, fmt='lammps/dump')`

`dpgen.generator.run.copy_model(numb_model, prv_iter_index, cur_iter_index)`

`dpgen.generator.run.detect_batch_size(batch_size, system=None)`

`dpgen.generator.run.dump_to_deepmd_raw(dump, deepmd_raw, type_map, fmt='gromacs/gro', charge=None)`

`dpgen.generator.run.expand_idx(in_list)`

`dpgen.generator.run.expand_matrix_values(target_list, cur_idx=0)`

`dpgen.generator.run.find_only_one_key(lmp_lines, key)`

`dpgen.generator.run.gen_run(args)`

`dpgen.generator.run.get_atomic_masses(atom)`

`dpgen.generator.run.get_job_names(jdata)`

`dpgen.generator.run.get_nframes(system)`

`dpgen.generator.run.get_sys_index(task)`

`dpgen.generator.run.make_fp(iter_index, jdata, mdata)`

Select the candidate strutures and make the input file of FP calculation.

Parameters

iter_index

[int] iter index

jdata

[dict] Run parameters.

mdata

[dict] Machine parameters.

`dpgen.generator.run.make_fp_abacus_scf(iter_index, jdata)`

`dpgen.generator.run.make_fp_amber_diff(iter_index: int, jdata: dict)`

Run amber twice to calculate high-level and low-level potential, and then generate difference between them.

Besides AMBER, one needs to install *dpamber* package, which is avaiable at <https://github.com/njzjz/dpamber>

Currently, it should be used with the AMBER model_devi driver.

Parameters

iter_index
[int] iter index
jdata
[dict]

Run parameters. The following parameters are used in this method:

mdin_prefix
[str] The path prefix to AMBER mdin files
qm_region
[list[str]] AMBER mask of the QM region. Each mask maps to a system.
qm_charge
[list[int]] Charge of the QM region. Each charge maps to a system.

high_level
[str] high level method

low_level
[str] low level method

fp_params
[dict]

This parameters includes:

high_level_mdin
[str] High-level AMBER mdin file. %qm_theory%, %qm_region%, and %qm_charge% will be replace.

low_level_mdin
[str] Low-level AMBER mdin file. %qm_theory%, %qm_region%, and %qm_charge% will be replace.

parm7_prefix
[str] The path prefix to AMBER PARM7 files

parm7
[list[str]] List of paths to AMBER PARM7 files. Each file maps to a system.

References

[1]

`dpgen.generator.run.make_fp_calculation(iter_index, jdata, mdata)`

Make the input file of FP calculation.

Parameters

iter_index
[int] iter index
jdata
[dict] Run parameters.
mdata
[dict] Machine parameters.

`dpgen.generator.run.make_fp_cp2k(iter_index, jdata)`

`dpgen.generator.run.make_fp_custom(iter_index, jdata)`

Make input file for customized FP style.

Convert the POSCAR file to custom format.

Parameters**iter_index**

[int] iter index

jdata

[dict] Run parameters.

```
dpigen.generator.run.make_fp_gaussian(iter_index, jdata)
dpigen.generator.run.make_fp_pwmat(iter_index, jdata)
dpigen.generator.run.make_fp_pwscf(iter_index, jdata)
dpigen.generator.run.make_fp_siesta(iter_index, jdata)
dpigen.generator.run.make_fp_task_name(sys_idx, counter)
dpigen.generator.run.make_fp_vasp(iter_index, jdata)
dpigen.generator.run.make_fp_vasp_cp_cvasp(iter_index, jdata)
dpigen.generator.run.make_fp_vasp_incar(iter_index, jdata, nbands_esti=None)
dpigen.generator.run.make_fp_vasp_kp(iter_index, jdata)
dpigen.generator.run.make_model_devi(iter_index, jdata, mdata)
dpigen.generator.run.make_model_devi_conf_name(sys_idx, conf_idx)
dpigen.generator.run.make_model_devi_task_name(sys_idx, task_idx)
dpigen.generator.run.make_pwmat_input(jdata, filename)
dpigen.generator.run.make_train(iter_index, jdata, mdata)
dpigen.generator.run.make_vasp_incar(jdata, filename)
dpigen.generator.run.make_vasp_incar_ele_temp(jdata, filename, ele_temp, nbands_esti=None)
dpigen.generator.run.parse_cur_job(cur_job)
dpigen.generator.run.parse_cur_job_revmat(cur_job, use_plm=False)
dpigen.generator.run.parse_cur_job_sys_revmat(cur_job, sys_idx, use_plm=False)
dpigen.generator.run.poscar_natoms(lines)
dpigen.generator.run.poscar_shuffle(poscar_in, poscar_out)
dpigen.generator.run.poscar_to_conf(poscar, conf)
dpigen.generator.run.post_fp(iter_index, jdata)
dpigen.generator.run.post_fp_abacus_scf(iter_index, jdata)
dpigen.generator.run.post_fp_amber_diff(iter_index, jdata)
dpigen.generator.run.post_fp_check_fail(iter_index, jdata, rfailed=None)
dpigen.generator.run.post_fp_cp2k(iter_index, jdata, rfailed=None)
```

```
dpigen.generator.run.post_fp_custom(iter_index, jdata)
Post fp for custom fp. Collect data from user-defined output_fn.
Parameters
  iter_index
    [int] The index of the current iteration.
  jdata
    [dict] The parameter data.

dpigen.generator.run.post_fp_gaussian(iter_index, jdata)

dpigen.generator.run.post_fp_pwmat(iter_index, jdata, rfailed=None)

dpigen.generator.run.post_fp_pwscf(iter_index, jdata)

dpigen.generator.run.post_fp_siesta(iter_index, jdata)

dpigen.generator.run.post_fp_vasp(iter_index, jdata, rfailed=None)

dpigen.generator.run.post_model_devi(iter_index, jdata, mdata)

dpigen.generator.run.post_train(iter_index, jdata, mdata)

dpigen.generator.run.revise_by_keys(lmp_lines, keys, values)

dpigen.generator.run.revise_lmp_input_dump(lmp_lines, trj_freq, model_devi_merge_traj=False)

dpigen.generator.run.revise_lmp_input_model(lmp_lines, task_model_list, trj_freq, deepmd_version='1')

dpigen.generator.run.revise_lmp_input_plm(lmp_lines, in_plm, out_plm='output.plumed')

dpigen.generator.run.run_fp(iter_index, jdata, mdata)

dpigen.generator.run.run_fp_inner(iter_index, jdata, mdata, forward_files, backward_files, check_fin,
                           log_file='fp.log', forward_common_files=[])

dpigen.generator.run.run_iter(param_file, machine_file)

dpigen.generator.run.run_md_model_devi(iter_index, jdata, mdata)

dpigen.generator.run.run_model_devi(iter_index, jdata, mdata)

dpigen.generator.run.run_train(iter_index, jdata, mdata)

dpigen.generator.run.set_version(mdata)

dpigen.generator.run.sys_link_fp_vasp_pp(iter_index, jdata)

dpigen.generator.run.update_mass_map(jdata)
```

dpigen.remote package

Submodules

dpigen.remote.decide_machine module

`dpgen.remote.decide_machine.convert_mdata(mdata, task_types=['train', 'model_devi', 'fp'])`

Convert mdata for DP-GEN main process. New conversion is like `mdata["fp"]["machine"]`, DP-GEN needs `mdata["fp_machine"]`.

Notice that we deprecate the function which can automatically select one most available machine, since this function was only used by Angus, and only supports for Slurm. In the future this can be implemented.

Parameters

mdata

[dict] Machine parameters to be converted.

task_types

[list of string] Type of tasks, default is ["train", "model_devi", "fp"]

Returns

dict

mdata converted

dpgen.simplify package

Submodules

dpgen.simplify.arginfo module

`dpgen.simplify.arginfo.fp_args() → list[Argument]`

Generate arginfo for fp.

Returns

List[Argument]

arginfo

`dpgen.simplify.arginfo.fp_style_variant_type_args() → Variant`

Generate variant for fp style variant type.

Returns

Variant

variant for fp style

`dpgen.simplify.arginfo.general_simplify_arginfo() → Argument`

General simplify arginfo.

Returns

Argument

arginfo

`dpgen.simplify.arginfo.simplify_jdata_arginfo() → Argument`

Generate arginfo for dpgen simplify jdata.

Returns

Argument

arginfo

`dpgen.simplify.arginfo.simplify_mdata_arginfo() → Argument`

Generate arginfo for dpgen simplify mdata.

Returns

Argument

arginfo

dpgen.simplify.simplify module

Simplify dataset (minimize the dataset size).

Init: pick up init data from dataset randomly

Iter: 00: train models (same as generator) 01: calculate model deviations of the rest dataset, pick up data with proper model deviation 02: fp (optional, if the original dataset do not have fp data, same as generator)

`dpgen.simplify.simplify.gen_simplify(args)`

`dpgen.simplify.simplify.get_multi_system(path: str | list[str], jdata: dict) → MultiSystems`

Get MultiSystems from a path or list of paths.

Both NumPy and HDF5 formats are supported. For details of two formats, refer to DeePMD-kit documentation.

If *labeled* in *jdata* is True, returns MultiSystems with LabeledSystem. Otherwise, returns MultiSystems with System.

Parameters

path

[str or list of str] path or list of paths to the dataset

jdata

[dict] parameters which may contain *labeled* key

Returns

`dpsys.MultiSystems`

MultiSystems with LabeledSystem or System

`dpgen.simplify.simplify.get_system_cls(jdata)`

`dpgen.simplify.simplify.init_model(iter_index, jdata, mdata)`

`dpgen.simplify.simplify.init_pick(iter_index, jdata, mdata)`

Pick up init data from dataset randomly.

`dpgen.simplify.simplify.make_fp(iter_index, jdata, mdata)`

`dpgen.simplify.simplify.make_fp_configs(iter_index, jdata)`

`dpgen.simplify.simplify.make_fp_labeled(iter_index, jdata)`

`dpgen.simplify.simplify.make_model_devi(iter_index, jdata, mdata)`

Calculate the model deviation of the rest idx.

`dpgen.simplify.simplify.post_model_devi(iter_index, jdata, mdata)`

Calculate the model deviation.

`dpgen.simplify.simplify.run_iter(param_file, machine_file)`

Init (iter 0): init_pick.

tasks (iter > 0): 00 make_train (same as generator) 01 run_train (same as generator) 02 post_train (same as generator) 03 make_model_devi 04 run_model_devi 05 post_model_devi 06 make_fp 07 run_fp (same as generator) 08 post_fp (same as generator)

`dpgen.simplify.simplify.run_model_devi(iter_index, jdata, mdata)`

Submit dp test tasks.

dpgen.tools package**Submodules****dpgen.tools.auto_gen_param module**

```
class dpgen.tools.auto_gen_param.Iteration(temp, nsteps_list=[500, 500, 1000, 1000, 3000, 3000, 6000,
                                                               6000], sub_iteration_num=8, ensemble='npt', press=[1.0,
                                                               10.0, 100.0, 1000.0, 5000.0, 10000.0, 20000.0, 50000.0],
                                                               trj_freq=10)
```

Bases: object

Attributes

index_iteration

Methods

gen_sub_iter
register_iteration
register_sub_itearation

```
current_num_of_itearation = 0
current_num_of_sub_itearation = 0
gen_sub_iter(system_list)
property index_iteration
classmethod register_iteration()
classmethod register_sub_itearation()

class dpgen.tools.auto_gen_param.System(system_prefix='')
```

Bases: object

Attributes

index_system

Methods

add_sub_system
get_sub_system
register_sub_system
register_system

```
add_sub_system(idx2, files_list)
current_num_of_sub_systems = 0
current_num_of_system = 0
```

```

get_sub_system()
property index_system
classmethod register_sub_system()
classmethod register_system()

dpigen.tools.auto_gen_param.auto_gen_param(args)
dpigen.tools.auto_gen_param.default_map_generator(map_list=[1, 1, 2, 2, 2, 4, 4, 4], data_list=None)
dpigen.tools.auto_gen_param.default_temps_generator(melt_point, temps_interval=0.1, num_temps=5)
dpigen.tools.auto_gen_param.get_basic_param_json(melt_point, out_param_filename='param_basic.json',
                                                scan_dir='./', file_name='POSCAR',
                                                init_file_name='type.raw', min_allow_files_num=16,
                                                map_list=[1, 1, 2, 2, 2, 4, 4, 4], meta_iter_num=4,
                                                sub_iteration_num=8, map_iterator=None,
                                                nsteps_list=[500, 500, 1000, 1000, 3000, 3000, 6000,
                                                6000], press=[1.0, 10.0, 100.0, 1000.0, 5000.0,
                                                10000.0, 20000.0, 50000.0], temps_iterator=None,
                                                ensemble='npt', trj_freq=10, temps_interval=0.1,
                                                num_temps=5)

dpigen.tools.auto_gen_param.get_init_data_sys(scan_dir='./', init_file_name='type.raw')

dpigen.tools.auto_gen_param.get_model_devi_jobs(melt_point, system_list, nsteps_list=[500, 500, 1000,
                                         1000, 3000, 3000, 6000, 6000], press=[1.0, 10.0,
                                         100.0, 1000.0, 5000.0, 10000.0, 20000.0, 50000.0],
                                         meta_iter_num=4, sub_iteration_num=8,
                                         temps_iterator=None, ensemble='npt', trj_freq=10,
                                         temps_interval=0.1, num_temps=5)

dpigen.tools.auto_gen_param.get_sys_configs(system_list)

dpigen.tools.auto_gen_param.get_system_list(system_dict, map_list=[1, 1, 2, 2, 2, 4, 4, 4],
                                              meta_iter_num=4, sub_iteration_num=8,
                                              map_iterator=None, file_name='POSCAR')

:Exmaple [[‘000000’, ‘000001’], [‘00000[2-9]’], [‘00001?’, ‘000020’],]
dpigen.tools.auto_gen_param.scan_files(scan_dir='./', file_name='POSCAR', min_allow_files_num=20)

```

dpigen.tools.collect_data module

```

dpigen.tools.collect_data.collect_data(target_folder, param_file, output, verbose=True)
dpigen.tools.collect_data.file_len(fname)

```

dpgen.tools.relabel module

```
dpgen.tools.relabel.copy_pp_files(tdir,fp_pp_path,fp_pp_files)
dpgen.tools.relabel.create_init_tasks(target_folder,param_file,output,fp_json,verbose=True)
dpgen.tools.relabel.create_tasks(target_folder,param_file,output,fp_json,verbose=True,numb_iter=-1)
dpgen.tools.relabel.get_lmp_info(input_file)
dpgen.tools.relabel.link_pp_files(tdir,fp_pp_path,fp_pp_files)
dpgen.tools.relabel.make_pwscf(tdir,fp_params,mass_map,fp_pp_path,fp_pp_files,user_input)
dpgen.tools.relabel.make_siesta(tdir,fp_params,fp_pp_path,fp_pp_files)
dpgen.tools.relabel.make_vasp(tdir,fp_params)
dpgen.tools.relabel.make_vasp_incar(tdir,fp_incar)
```

dpgen.tools.run_report module

```
dpgen.tools.run_report.run_report(args)
```

dpgen.tools.stat_iter module

```
dpgen.tools.stat_iter.stat_iter(target_folder,param_file='param.json',verbose=True,mute=False)
```

dpgen.tools.stat_sys module

```
dpgen.tools.stat_sys.ascii_hist(count)
dpgen.tools.stat_sys.run_report(args)
dpgen.tools.stat_sys.stat_sys(target_folder,param_file='param.json',verbose=True,mute=False)
```

dpgen.tools.stat_time module

```
dpgen.tools.stat_time.stat_time(target_folder,param_file='param.json',verbose=True,mute=False)
```

10.1.2 Submodules

10.1.3 dpgen.arginfo module

```
dpgen.arginfo.general_mdata_arginfo(name: str, tasks: tuple[str]) → Argument
```

Generate arginfo for general mdata.

Parameters

name	[str] mdata name
-------------	------------------

tasks
[tuple[str]] tuple of task keys, e.g. (“train”, “model_devi”, “fp”)

Returns

Argument
arginfo

10.1.4 dpgen.gui module

DP-GUI entrypoint.

`dpgen.gui.start_dpgui(args: Namespace)`

Host DP-GUI server.

Parameters

args

[argparse.Namespace] Arguments from argparse.

Raises

ModuleNotFoundError

The dpgui package is not installed

10.1.5 dpgen.main module

`dpgen.main.main()`

`dpgen.main.main_parser() → ArgumentParser`

Returns parser for *dpgen* command.

Returns

argparse.ArgumentParser

parser for *dpgen* command

10.1.6 dpgen.util module

`dpgen.util.box_center(ch='', fill=' ', sp='|')`

Put the string at the center of | |.

`dpgen.util.convert_training_data_to_hdf5(input_files: list[str], h5_file: str)`

Convert training data to HDF5 format and update the input files.

Parameters

input_files

[list of str] DeePMD-kit input file names

h5_file

[str] HDF5 file name

`dpgen.util.expand_sys_str(root_dir: str | Path) → list[str]`

Recursively iterate over directories taking those that contain *type.raw* file.

If *root_dir* is a file but not a directory, it will be assumed as an HDF5 file.

Parameters

root_dir

[Union[str, Path]] starting directory

Returns

List[str]

list of string pointing to system directories

Raises**RuntimeError**

No system was found in the directory

`dpgen.util.load_file(filename: str | PathLike) → dict`

Load data from a JSON or YAML file.

Parameters**filename**

[str or os.PathLike] The filename to load data from, whose suffix should be .json, .yaml, or .yml

Returns**dict**

The data loaded from the file

Raises**ValueError**

If the file format is not supported

`dpgen.util.normalize(arginfo: Argument, data: dict, strict_check: bool = True) → dict`

Normalize and check input data.

Parameters**arginfo**

[dargs.Argument] argument information

data

[dict] input data

strict_check

[bool, default=True] strict check data or not

Returns**dict**

normalized data

`dpgen.util.sepline(ch='-', sp='-', screen=False)`

Separate the output by '-'.

`dpgen.util.set_directory(path: Path)`

Sets the current working path within the context.

Parameters**path**

[Path] The path to the cwd

Yields**None****Examples**

```
>>> with set_directory("some_path"):
...     do_something()
```

`dpgen.util.setup_ele_temp(atomic: bool)`

Set electronic temperature as required input data.

Parameters**atomic**

[bool] Whether to use atomic temperature or frame temperature

CHAPTER
ELEVEN

AUTHORS

- A bot of @njzjz
- AnguseZhang
- Anopaul
- BaozCWJ
- Chenqqian Zhang
- Cloudac7
- EC2 Default User
- Ericwang6
- Futaki Haduki
- Futaki Hatuki
- Han Wang
- HuangJiameng
- Jinzhe Zeng
- Kick-H
- Levi Zhou
- LiangWenshuo1118
- Liu Renxi
- Liu-RX
- LiuGroupHNU
- Manyi Yang
- Pan Xiang
- Peng Xingliang
- Pinchen Xie
- Sian Chen
- Silvia-liu
- TaipingHu
- Tongqi Wen

- TongqiWen
- TrellixVulnTeam
- Waikit Chan
- Wanrun Jiang
- Yifan Li
- Yingze Wang
- Yixiao Chen
- Yoh
- Yongbin Zhuang
- Yuan Fengbo
- Yuan Fengbo ()
- Yunfan Xu
- Yunpei Liu
- Yuzhi Zhang
- Zhiwei Zhang
- Zhuoyuan
- baihuyu12
- cherushui
- cyFortneu
- deepmodeling
- dingzhaohan
- dinngzhaohan
- felix5572
- fqgong
- haidi
- hongriTianqi
- jameswind
- kiwi
- likefallwind
- pee8379
- pre-commit-ci[bot]
- p xl xing liang
- robinzhuang
- robinzyb
- root
- shazj99

- tianhongzhen
- tuoping
- unknown
- yuzhi
- zhang yuzhi
- zhangbei07
- zhaohan
- zhengming-HIT
- zhenyu
- ziqi-hu
-
- genindex
- modindex
- search

BIBLIOGRAPHY

- [1] Development of Range-Corrected Deep Learning Potentials for Fast, Accurate Quantum Mechanical/Molecular Mechanical Simulations of Chemical Reactions in Solution, Jinzhe Zeng, Timothy J. Giese, Sölen Ekesan, and Darrin M. York, Journal of Chemical Theory and Computation 2021 17 (11), 6993-7009

PYTHON MODULE INDEX

d

dpigen, 251
dpigen.arginfo, 302
dpigen.auto_test, 251
dpigen.auto_test.ABACUS, 259
dpigen.auto_test.calculator, 271
dpigen.auto_test.common_equi, 272
dpigen.auto_test.common_prop, 272
dpigen.auto_test.Elastic, 261
dpigen.auto_test.EOS, 261
dpigen.auto_test.Gamma, 263
dpigen.auto_test.gen_confs, 272
dpigen.auto_test.Interstitial, 264
dpigen.auto_test.Lammps, 264
dpigen.auto_test.lib, 251
dpigen.auto_test.lib.abacus, 251
dpigen.auto_test.lib.crys, 252
dpigen.auto_test.lib.lammps, 252
dpigen.auto_test.lib.lmp, 253
dpigen.auto_test.lib.mfp_eosfit, 253
dpigen.auto_test.lib.pwscf, 257
dpigen.auto_test.lib.siesta, 258
dpigen.auto_test.lib.util, 258
dpigen.auto_test.lib.utils, 258
dpigen.auto_test.lib.vasp, 258
dpigen.auto_test.mpdb, 272
dpigen.auto_test.Property, 266
dpigen.auto_test.refine, 272
dpigen.auto_test.reproduce, 273
dpigen.auto_test.run, 273
dpigen.auto_test.Surface, 267
dpigen.auto_test.Task, 268
dpigen.auto_test.Vacancy, 271
dpigen.auto_test.VASP, 269
dpigen.collect, 273
dpigen.collect.collect, 273
dpigen.data, 273
dpigen.data.arginfo, 276
dpigen.data.gen, 277
dpigen.data.reaction, 278
dpigen.data.surf, 278
dpigen.data.tools, 273

dpigen.data.tools.bcc, 273
dpigen.data.tools.cessp2force_lin, 274
dpigen.data.tools.create_random_disturb, 274
dpigen.data.tools.diamond, 274
dpigen.data.tools.fcc, 275
dpigen.data.tools.hcp, 275
dpigen.data.tools.io_lammps, 275
dpigen.data.tools.sc, 276
dpigen.database, 279
dpigen.database.entry, 283
dpigen.database.run, 284
dpigen.database.vasp, 284
dpigen.dispatcher, 287
dpigen.dispatcher.Dispatcher, 287
dpigen.generator, 288
dpigen.generator.arginfo, 292
dpigen.generator.lib, 288
dpigen.generator.lib.abacus_scf, 288
dpigen.generator.lib.cp2k, 289
dpigen.generator.lib.cvasp, 289
dpigen.generator.lib.ele_temp, 289
dpigen.generator.lib.gaussian, 290
dpigen.generator.lib.lammps, 290
dpigen.generator.lib.make_calypso, 290
dpigen.generator.lib.parse_calypso, 290
dpigen.generator.lib.pwmat, 290
dpigen.generator.lib.pwscf, 291
dpigen.generator.lib.run_calypso, 291
dpigen.generator.lib.siesta, 291
dpigen.generator.lib.utils, 292
dpigen.generator.lib.vasp, 292
dpigen.generator.run, 294
dpigen.gui, 303
dpigen.main, 303
dpigen.remote, 297
dpigen.remote.decide_machine, 297
dpigen.simplify, 298
dpigen.simplify.arginfo, 298
dpigen.simplify.simplify, 299
dpigen.tools, 300
dpigen.tools.auto_gen_param, 300
dpigen.tools.collect_data, 301

[dpgen.tools.relabel](#), 302
[dpgen.tools.run_report](#), 302
[dpgen.tools.stat_iter](#), 302
[dpgen.tools.stat_sys](#), 302
[dpgen.tools.stat_time](#), 302
[dpgen.util](#), 303

INDEX

A

ABACUS (*class in dpgen.auto_test.ABACUS*), 259
add_sub_system() (dpgen.tools.auto_gen_param.System method), 300
analysis() (in module dpgen.generator.lib.run_calypso), 291
api_version:
 init_bulk_mdata/api_version (Argument), 81
 init_reaction_mdata/api_version (Argument), 114
 init_surf_mdata/api_version (Argument), 99
 run_mdata/api_version (Argument), 40
 simplify_mdata/api_version (Argument), 168
append_script:
 init_bulk_mdata/fp/resources/append_scriptbackward_files (dpgen.auto_test.Task.Task property), (Argument), 89
 init_reaction_mdata/build/resources/append_scriptbackward_files() (dpgen.auto_test.ABACUS.ABACUS method), 135
 init_reaction_mdata/fp/resources/append_scriptbackward_files() (dpgen.auto_test.Lammps.Lammps method), 148
 init_reaction_mdata/reaxff/resources/append_scriptbackward_files() (dpgen.auto_test.VASP.VASP method), 123
 init_surf_mdata/fp/resources/append_scriptbasic_args() (in module dpgen.generator.arginfo), 292 (Argument), 107
 basis_set:
 run_mdata/fp/resources/append_script (Argument), 72
 run_mdata/model_devi/resources/append_script (Argument), 60
 run_mdata/train/resources/append_script (Argument), 48
 simplify_mdata/fp/resources/append_script (Argument), 201
 simplify_mdata/model_devi/resources/append_script (Argument), 189
 simplify_mdata/train/resources/append_script (Argument), 177
apply_type_map() (in module dpgen.auto_test.lib.lammps), 252
as_dict() (dpgen.database.DPPotcar method), 279
as_dict() (dpgen.database.Entry method), 280
as_dict() (dpgen.database.entry.Entry method), 284

as_dict() (dpgen.database.vasp.DPPotcar method), 285
as_dict() (dpgen.database.vasp.VaspInput method), 286
as_dict() (dpgen.database.VaspInput method), 282
ascii_hist() (in module dpgen.tools.stat_sys), 302
ase2lammpsdata() (in module dpgen.data.tools.io_lammps), 275
atom_masses:
 init_bulk_jdata[ABACUS]/atom_masses (Argument), 81
auto_gen_param() (in module dpgen.tools.auto_gen_param), 301

B

backward_files() (dpgen.auto_test.Lammps.Lammps method), 265
backward_files() (dpgen.auto_test.VASP.VASP method), 269
basic_args() (in module dpgen.generator.arginfo), 292
basis_set:
 run_jdata[fp_style=gaussian]/fp_params/basis_set (Argument), 34
batch_type:
 init_bulk_mdata/fp/machine/batch_type (Argument), 81
 init_bulk_mdata/fp/resources/batch_type (Argument), 163
 simplify_jdata[gaussian]/fp_params/basis_set (Argument), 127
 init_reaction_mdata/build/machine/batch_type (Argument), 136
 init_reaction_mdata/build/resources/batch_type (Argument), 139
 init_reaction_mdata/fp/machine/batch_type (Argument), 148
 init_reaction_mdata/fp/resources/batch_type (Argument), 148

init_reaction_mdata/reaxff/machine/batch_type() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254
 (Argument), 115

init_reaction_mdata/reaxff/resources/batch_type() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254
 (Argument), 123

init_surf_mdata/fp/machine/batch_type() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254
 (Argument), 100

init_surf_mdata/fp/resources/batch_type() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254
 (Argument), 108

run_mdata/fp/machine/batch_type() (Argument), 254
 (Argument), 64

run_mdata/fp/resources/batch_type() (Argument), 254
 (Argument), 72

run_mdata/model_devi/machine/batch_type() (Argument), 254
 (Argument), 52

run_mdata/model_devi/resources/batch_type() (Argument), 254
 (Argument), 60

run_mdata/train/machine/batch_type() (Argument), 254
 (Argument), 41

run_mdata/train/resources/batch_type() (Argument), 254
 (Argument), 48

simplify_mdata/fp/machine/batch_type() (Argument), 254
 (Argument), 193

simplify_mdata/fp/resources/batch_type() (Argument), 254
 (Argument), 202

simplify_mdata/model_devi/machine/batch_type() (Argument), 254
 (Argument), 181

simplify_mdata/model_devi/resources/batch_type() (Argument), 254
 (Argument), 190

simplify_mdata/train/machine/batch_type() (Argument), 254
 (Argument), 169

simplify_mdata/train/resources/batch_type() (Argument), 254
 (Argument), 177

bcc() (in module `dpgen.auto_test.lib.crys`), 252

birch() (in module `dpgen.auto_test.lib.mfp_eosfit`), 254

BM4() (in module `dpgen.auto_test.lib.mfp_eosfit`), 253

BM5() (in module `dpgen.auto_test.lib.mfp_eosfit`), 253

box2lmpbox() (in module `dpgen.auto_test.lib.lmp`), 253

box_center() (in module `dpgen.util`), 303

build:
 init_reaction_mdata/build(Argument), 127

C

calc_props_BM4() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

calc_props_LOG4() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

calc_props_mBm4() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

calc_props_mBm4poly() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

calc_props_mBm5poly() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

calc_props_morse() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

calc_props_vinet() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

calc_v0_mBm4poly() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

calc_v0_mBm5poly() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 254

car2dir() (in module `dpgen.data.tools.io_lammps`), 275

cell_type:
 init_bulk_jdata/cell_type(Argument), 78

init_surf_jdata/cell_type(Argument), 96

centralize_slab() (static method), 263

charge:
 run_jdata[fp_style=gaussian]/fp_params/charge(Argument), 34

simplify_jdata[gaussian]/fp_params/charge(Argument), 163

check_apikey() (in module `dpgen.auto_test.mpdb`), 272

check_bad_box() (in module `dpgen.generator.run`), 294

check_cluster() (in module `dpgen.generator.run`), 294

check_finished() (in module `dp-gen.auto_test.lib.abacus`), 251

check_finished() (in module `dp-gen.auto_test.lib.lammps`), 252

check_finished() (in module `dp-gen.auto_test.lib.vasp`), 258

check_finished_new() (in module `dp-gen.auto_test.lib.lammps`), 252

check_stru_fixed() (in module `dp-gen.auto_test.lib.abacus`), 251

class_cell_type() (in module `dpgen.data.gen`), 277

class_cell_type() (in module `dpgen.data.surf`), 278

clean_asynchronously:
 init_bulk_mdata/fp/machine/clean_asynchronously(Argument), 82

init_reaction_mdata/build/machine/clean_asynchronously(Argument), 128

init_reaction_mdata/fp/machine/clean_asynchronously(Argument), 140

init_reaction_mdata/reaxff/machine/clean_asynchronously(Argument), 115

init_surf_mdata/fp/machine/clean_asynchronously(Argument), 100

run_mdata/fp/machine/clean_asynchronously(Argument), 65

run_mdata/model_devi/machine/clean_asynchronously(Argument), 53

run_mdata/train/machine/clean_asynchronously(Argument), 41

simplify_mdata/fp/machine/clean_asynchronously

(Argument), 194
simplify_mdata/model_devi/machine/clean_asynchronous (Argument), 182
simplify_mdata/train/machine/clean_asynchronous (Argument), 169
cluster_cutoff:
 run_jdata[fp_style=gaussian]/cluster_cutoff (Argument), 33
 run_jdata[fp_style=siesta]/cluster_cutoff (Argument), 34
 simplify_jdata[gaussian]/cluster_cutoff (Argument), 162
 simplify_jdata[siesta]/cluster_cutoff (Argument), 164
cluster_cutoff_hard:
 run_jdata[fp_style=gaussian]/cluster_cutoff_hard (Argument), 33
 simplify_jdata[gaussian]/cluster_cutoff_hard (Argument), 162
cluster_minify:
 run_jdata[fp_style=gaussian]/cluster_minify (Argument), 33
 simplify_jdata[gaussian]/cluster_minify (Argument), 162
cmd_append_log() (in module *dpgen.lib.utils*), 258
cmd_append_log() (in module *dpgen.generator.lib.utils*), 292
coll_abacus_md() (in module *dpgen.data.gen*), 277
coll_ndata:
 init_bulk_jdata/coll_ndata (Argument), 80
 init_surf_jdata/coll_ndata (Argument), 99
coll_vasp_md() (in module *dpgen.data.gen*), 277
collect_data() (in module *dpgen.collect.collect*), 273
collect_data() (in module *dpgen.tools.collect_data*), 301
collect_task() (in module *dpgen.auto_test.lib.util*), 258
command:
 init_bulk_mdata/fp/command (Argument), 81
 init_reaction_mdata/build/command (Argument), 127
 init_reaction_mdata/fp/command (Argument), 139
 init_reaction_mdata/reaxff/command (Argument), 114
 init_surf_mdata/fp/command (Argument), 99
 run_mdata/fp/command (Argument), 64
 run_mdata/model_devi/command (Argument), 52
 run_mdata/train/command (Argument), 40
 simplify_mdata/fp/command (Argument), 193
 simplify_mdata/model_devi/command (Argument), 181
 simplify_mdata/train/command (Argument), 169
compute() (dpgen.auto_test.Property.Property method), 266
compute() (dpgen.auto_test.Task.Task method), 268
compute() (dpgen.auto_test.VASP.VASP method), 270
context_type:
 init_bulk_mdata/fp/machine/context_type (Argument), 82
 init_reaction_mdata/build/machine/context_type (Argument), 128
 init_reaction_mdata/fp/machine/context_type (Argument), 140
 init_reaction_mdata/reaxff/machine/context_type (Argument), 115
 init_surf_mdata/fp/machine/context_type (Argument), 100
 run_mdata/fp/machine/context_type (Argument), 65
 run_mdata/model_devi/machine/context_type (Argument), 53
 run_mdata/train/machine/context_type (Argument), 41
simplify_mdata/fp/machine/context_type (Argument), 194
simplify_mdata/model_devi/machine/context_type (Argument), 182
simplify_mdata/train/machine/context_type (Argument), 170
control:
 init_reaction_jdata/reaxff/control (Argument), 113
convert_cell() (in module *dpgen.data.tools.io_lammps*), 275
convert_data() (in module *dpgen.data.reaction*), 278
convert_forces() (in module *dpgen.data.tools.io_lammps*), 275
convert_mdata() (in module *dpgen.remote.decide_machine*), 297
convert_positions() (in module *dpgen.data.tools.io_lammps*), 275
convert_stress() (in module *dpgen.data.tools.io_lammps*), 275
convert_training_data_to_hdf5() (in module *dpgen.util*), 303
copy_file_list() (in module *dpgen.auto_test.lib.utils*), 258
copy_file_list() (in module *dpgen.generator.lib.utils*), 292
copy_model() (in module *dpgen.generator.run*), 294
copy_pp_files() (in module *dpgen.tools.relabel*), 302

```

cpu_per_node:                                     custom_flags:
    init_bulk_mdata/fp/resources/cpu_per_node   init_bulk_mdata/fp/resources/custom_flags
        (Argument), 87                         (Argument), 87
    init_reaction_mdata/build/resources/cpu_per_node init_reaction_mdata/build/resources/custom_flags
        (Argument), 133                         (Argument), 133
    init_reaction_mdata/fp/resources/cpu_per_node init_reaction_mdata/fp/resources/custom_flags
        (Argument), 145                         (Argument), 146
    init_reaction_mdata/reaxff/resources/cpu_per_node init_reaction_mdata/reaxff/resources/custom_flags
        (Argument), 120                         (Argument), 121
    init_surf_mdata/fp/resources/cpu_per_node   init_surf_mdata/fp/resources/custom_flags
        (Argument), 105                         (Argument), 105
    run_mdata/fp/resources/cpu_per_node       run_mdata/fp/resources/custom_flags
        (Argument), 70                          (Argument), 70
    run_mdata/model_devi/resources/cpu_per_node run_mdata/model_devi/resources/custom_flags
        (Argument), 58                          (Argument), 58
    run_mdata/train/resources/cpu_per_node    run_mdata/train/resources/custom_flags
        (Argument), 46                          (Argument), 46
    simplify_mdata/fp/resources/cpu_per_node  simplify_mdata/fp/resources/custom_flags
        (Argument), 199                         (Argument), 199
    simplify_mdata/model_devi/resources/cpu_per_no simplify_mdata/model_devi/resources/custom_flags
        (Argument), 187                         (Argument), 187
    simplify_mdata/train/resources/cpu_per_node simplify_mdata/train/resources/custom_flags
        (Argument), 174                         (Argument), 175
create_disturbs_abacus_dev() (in module dp-           custom_gpu_line:
    gen.data.tools.create_random_disturb), 274
create_disturbs_ase() (in module dp-               init_bulk_mdata/fp/resources[LSF]/kwargs/custom_gpu_li
    gen.data.tools.create_random_disturb), 274
create_disturbs_ase_dev() (in module dp-           (Argument), 92
    gen.data.tools.create_random_disturb), 274
create_disturbs_atomsk() (in module dp-           init_bulk_mdata/fp/resources[SlurmJobArray]/kwargs/cus
    gen.data.tools.create_random_disturb), 274
create_init_tasks() (in module dpgen.tools.relabel), init_bulk_mdata/fp/resources[Slurm]/kwargs/custom_gpu_
    302                                         (Argument), 91
create_path() (in module dpgen.auto_test.lib.utils), init_bulk_mdata/fp/resources[Slurm]/kwargs/custom_gpu_
    258                                         (Argument), 91
create_path() (in module dpgen.data.gen), 277
create_path() (in module dpgen.data.surf), 278
create_path() (in module dpgen.generator.lib.utils),
    292
create_random_alloys() (in module dp-           init_reaction_mdata/build/resources[LSF]/kwargs/custom_
    gen.data.tools.create_random_disturb), 274
create_tasks() (in module dpgen.tools.relabel), 302
current_num_of_itearation (dp-           init_reaction_mdata/build/resources[SlurmJobArray]/kwa
    gen.tools.auto_gen_param.Iteration attribute), 300
current_num_of_sub_itearation (dp-           (Argument), 138
    gen.tools.auto_gen_param.Iteration attribute), 300
current_num_of_sub_systems (dp-           init_reaction_mdata/fp/resources[LSF]/kwargs/custom_g
    gen.tools.auto_gen_param.System attribute), 300
current_num_of_system (dp-           init_reaction_mdata/fp/resources[SlurmJobArray]/kwa
    gen.tools.auto_gen_param.System attribute), 300

```

run_mdata/fp/resources[LSF]/kwargs/custom_gpu_line(*Argument*), 200
 (*Argument*), 75
 simplify_mdata/model_devi/resources/strategy/customize
 run_mdata/fp/resources[SlurmJobArray]/kwargs/custom_gpu_line, 188
 (*Argument*), 74
 simplify_mdata/train/resources/strategy/customized_scr
 run_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line(*Argument*), 176
 (*Argument*), 73
 cutoff:
 run_mdata/model_devi/resources[LSF]/kwargs/custom_gpu_line_jdata/cutoff (*Argument*), 113
 (*Argument*), 63
 run_jdata[model_devi_engine=amber]/cutoff
 run_mdata/model_devi/resources[SlurmJobArray]/kwargs/custom_gpu_line
 (*Argument*), 62
 cvasp:
 run_mdata/model_devi/resources[Slurm]/kwargs/custom_gpu_line[finestyle=vasp]/cvasp (*Argument*),
 (*Argument*), 62
 32
 run_mdata/train/resources[LSF]/kwargs/custom_gpu_line_jdata[vasp]/cvasp (*Argument*), 161
 (*Argument*), 51
 cvt_1frame() (in module *dpgen.generator.lib.pwscf*),
 run_mdata/train/resources[SlurmJobArray]/kwargs/custom_gpu_line
 (*Argument*), 50
 cvt_lammps_conf() (in module *dpgen.generator.lib.lammps*), 291
 run_mdata/train/resources[Slurm]/kwargs/custom_gpu_line[no_test.lib.lammps], 252
 (*Argument*), 49
 simplify_mdata/fp/resources[LSF]/kwargs/custom_gpu_line
 (*Argument*), 204
 data:
 simplify_mdata/fp/resources[SlurmJobArray]/kwargs/custom_gpu_line
 (*Argument*), 203
 init_reaction_mdata/reaxff/data (Argument), 112
 simplify_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line
 (*Argument*), 203
 data_args() (in module *dpgen.generator.arginfo*), 292
 dataset_size:
 simplify_mdata/model_devi/resources[LSF]/kwargs/custom_gpu_line
 (*Argument*), 192
 init_reaction_mdata/dataset_size (Argument), 114
 simplify_mdata/model_devi/resources[SlurmJobArray]/kwargs/custom_gpu_line
 (*Argument*), 191
 deepmd_version:
 simplify_mdata/model_devi/resources[Slurm]/kwargs/custom_gpu_line
 (*Argument*), 191
 init_reaction_mdata/deepmd_version (Argument), 81
 simplify_mdata/train/resources[LSF]/kwargs/custom_gpu_line
 (*Argument*), 180
 init_reaction_mdata/deepmd_version (Argument), 114
 simplify_mdata/train/resources[SlurmJobArray]/kwargs/custom_gpu_line
 (*Argument*), 179
 init_surf_mdata/deepmd_version (Argument), 99
 simplify_mdata/train/resources[Slurm]/kwargs/custom_gpu_line
 (*Argument*), 178
 init_surf_mdata/deepmd_version (Argument), 40
 simplify_mdata/deepmd_version (Argument), 169
 customized_script_header_template_file:
 init_bulk_mdata/fp/resources/strategy/customized_script_header_template_file
 default_map_generator() (in module *dpgen.tools.auto_gen_param*), 301
 (*Argument*), 88
 gen.tools.auto_gen_param), 301
 init_reaction_mdata/build/resources/strategy/customized_script_header_template_file
 (*Argument*), 134
 default_temp_generator() (in module *dpgen.tools.auto_gen_param*), 301
 init_reaction_mdata/fp/resources/strategy/customized_script_header_template_file
 (*Argument*), 146
 run_jdata/default_training_param (Argument), 20
 init_reaction_mdata/reaxff/resources/strategy/customized_script_header_template_file
 (*Argument*, 121
 simplify_jdata/default_training_param
 init_surf_mdata/fp/resources/strategy/customized_script_header_template_file
 (*Argument*, 106
 detailed_report_make_fp:
 run_mdata/fp/resources/strategy/customized_script_header_template_file
 (*Argument*, 71
 run_jdata/detailed_report_make_fp (Argument), 22
 run_mdata/model_devi/resources/strategy/customized_script_header_template_file
 (*Argument*, 59
 detect_batch_size() (in module *dpgen.generator.run*), 294
 run_mdata/train/resources/strategy/customized_script_header_template_file
 (*Argument*, 47
 detect_multiplicity() (in module *dpgen.generator.lib.gaussian*), 290
 simplify_mdata/fp/resources/strategy/customized_script_header_template_file
 (*Argument*) (in module *dpgen.generator.lib.gauss*), 252

diamond() (*in module* `dpgen.auto_test.lib.crys`), 252
dir2car() (*in module* `dpgen.data.tools.io_lammps`), 275
disang:
 `run_jdata[model_devi_engine=amber]/disang` (*Argument*), 31
disang_prefix:
 `run_jdata[model_devi_engine=amber]/disang_prefix` (*Argument*), 31
dp_compress:
 `run_jdata/dp_compress` (*Argument*), 20
 `simplify_jdata/dp_compress` (*Argument*), 159
dp_train_skip_neighbor_stat:
 `run_jdata/dp_train_skip_neighbor_stat` (*Argument*), 20
 `simplify_jdata/dp_train_skip_neighbor_stat` (*Argument*), 158
dpgen
 `module`, 251
dpgen.arginfo
 `module`, 302
dpgen.auto_test
 `module`, 251
dpgen.auto_test.ABACUS
 `module`, 259
dpgen.auto_test.calculator
 `module`, 271
dpgen.auto_test.common_equi
 `module`, 272
dpgen.auto_test.common_prop
 `module`, 272
dpgen.auto_test.Elastic
 `module`, 261
dpgen.auto_test.EOS
 `module`, 261
dpgen.auto_test.Gamma
 `module`, 263
dpgen.auto_test.gen_confs
 `module`, 272
dpgen.auto_test.Interstitial
 `module`, 264
dpgen.auto_test.Lammps
 `module`, 264
dpgen.auto_test.lib
 `module`, 251
dpgen.auto_test.lib.abacus
 `module`, 251
dpgen.auto_test.lib.crys
 `module`, 252
dpgen.auto_test.lib.lammps
 `module`, 252
dpgen.auto_test.lib.lmp
 `module`, 253
dpgen.auto_test.lib.mfp_eosfit
 `module`, 253
dpgen.auto_test.lib.pwscf
 `module`, 257
dpgen.auto_test.lib.siesta
 `module`, 258
dpgen.auto_test.lib.util
 `module`, 258
~~dpgen.auto_test.lib.utils~~
 `module`, 258
dpgen.auto_test.lib.vasp
 `module`, 258
dpgen.auto_test.mpdb
 `module`, 272
dpgen.auto_test.Property
 `module`, 266
dpgen.auto_test.refine
 `module`, 272
dpgen.auto_test.reproduce
 `module`, 273
dpgen.auto_test.run
 `module`, 273
dpgen.auto_test.Surface
 `module`, 267
dpgen.auto_test.Task
 `module`, 268
dpgen.auto_test.Vacancy
 `module`, 271
dpgen.auto_test.VASP
 `module`, 269
dpgen.collect
 `module`, 273
dpgen.collect.collect
 `module`, 273
dpgen.data
 `module`, 273
dpgen.data.arginfo
 `module`, 276
dpgen.data.gen
 `module`, 277
dpgen.data.reaction
 `module`, 278
dpgen.data.surf
 `module`, 278
dpgen.data.tools
 `module`, 273
dpgen.data.tools.bcc
 `module`, 273
dpgen.data.tools.cessp2force_lin
 `module`, 274
dpgen.data.tools.create_random_disturb
 `module`, 274
dpgen.data.tools.diamond
 `module`, 274
dpgen.data.tools.fcc
 `module`, 275

```

dpigen.data.tools.hcp
    module, 275
dpigen.data.tools.io_lammps
    module, 275
dpigen.data.tools.sc
    module, 276
dpigen.database
    module, 279
dpigen.database.entry
    module, 283
dpigen.database.run
    module, 284
dpigen.database.vasp
    module, 284
dpigen.dispatcher
    module, 287
dpigen.dispatcher.Dispatcher
    module, 287
dpigen.generator
    module, 288
dpigen.generator.arginfo
    module, 292
dpigen.generator.lib
    module, 288
dpigen.generator.lib.abacus_scf
    module, 288
dpigen.generator.lib.cp2k
    module, 289
dpigen.generator.lib.cvasp
    module, 289
dpigen.generator.lib.ele_temp
    module, 289
dpigen.generator.lib.gaussian
    module, 290
dpigen.generator.lib.lammps
    module, 290
dpigen.generator.lib.make_calypso
    module, 290
dpigen.generator.lib.parse_calypso
    module, 290
dpigen.generator.lib.pwmat
    module, 290
dpigen.generator.lib.pwscf
    module, 291
dpigen.generator.lib.run_calypso
    module, 291
dpigen.generator.lib.siesta
    module, 291
dpigen.generator.lib.utils
    module, 292
dpigen.generator.lib.vasp
    module, 292
dpigen.generator.run
    module, 294
dpigen.gui
    module, 303
dpigen.main
    module, 303
dpigen.remote
    module, 297
dpigen.remote.decide_machine
    module, 297
dpigen.simplify
    module, 298
dpigen.simplify.arginfo
    module, 298
dpigen.simplify.simplify
    module, 299
dpigen.tools
    module, 300
dpigen.tools.auto_gen_param
    module, 300
dpigen.tools.collect_data
    module, 301
dpigen.tools.relabel
    module, 302
dpigen.tools.run_report
    module, 302
dpigen.tools.stat_iter
    module, 302
dpigen.tools.stat_sys
    module, 302
dpigen.tools.stat_time
    module, 302
dpigen.util
    module, 303
DPPotcar (class in dpigen.database), 279
DPPotcar (class in dpigen.database.vasp), 284
dt:
    init_reaction_jdata/reaxff/dt (Argument),
        113
dump_freq:
    init_reaction_jdata/reaxff/dump_freq (Argument), 113
dump_to_deepmd_raw() (in module dp-
gen.generator.run), 294
E
ecut:
    run_jdata[fp_style=pwscf]/fp_params/ecut
        (Argument), 38
    run_jdata[fp_style=siesta]/fp_params/ecut
        (Argument), 35
    simplify_jdata[pwscf]/fp_params/ecut (Argument), 167
    simplify_jdata[siesta]/fp_params/ecut
        (Argument), 164
ediff:

```



```

forward_files (dpgen.auto_test.Task.Task property),  

    269  

forward_files() (dpgen.auto_test.ABACUS.ABACUS  

    method), 260  

forward_files() (dpgen.auto_test.Lammps.Lammps  

    method), 265  

forward_files() (dpgen.auto_test.VASP.VASP  

    method), 270  

fp:  

    init_bulk_mdata/fp (Argument), 81  

    init_reaction_mdata/fp (Argument), 139  

    init_surf_mdata/fp (Argument), 99  

    run_mdata/fp (Argument), 64  

    simplify_mdata/fp (Argument), 193  

fp_accurate_soft_threshold:  

    run_jdata/fp_accurate_soft_threshold (Ar-  

        gument), 22  

    simplify_jdata/fp_accurate_soft_threshold  

        (Argument), 161  

fp_accurate_threshold:  

    run_jdata/fp_accurate_threshold (Argu-  

        ment), 22  

    simplify_jdata/fp_accurate_threshold (Ar-  

        gument), 160  

fp_aniso_kspacing:  

    run_jdata[fp_style=vasp]/fp_aniso_kspacing  

        (Argument), 32  

    simplify_jdata[vasp]/fp_aniso_kspacing  

        (Argument), 161  

fp_args() (in module dpgen.generator.arginfo), 292  

fp_args() (in module dpgen.simplify.arginfo), 298  

fp_cluster_vacuum:  

    run_jdata/fp_cluster_vacuum (Argument), 22  

fp_dpks_descriptor:  

    run_jdata[fp_style=abacus]/fp_dpks_descriptor  

        (Argument), 37  

    simplify_jdata[abacus]/fp_dpks_descriptor  

        (Argument), 166  

fp_incar:  

    run_jdata[fp_style=abacus]/fp_incar  

        (Argument), 36  

    run_jdata[fp_style=vasp]/fp_incar (Argu-  

        ment), 32  

    simplify_jdata[abacus]/fp_incar (Argu-  

        ment), 166  

    simplify_jdata[vasp]/fp_incar (Argument),  

        161  

fp_kpt_file:  

    run_jdata[fp_style=abacus]/fp_kpt_file  

        (Argument), 37  

    simplify_jdata[abacus]/fp_kpt_file (Argu-  

        ment), 166  

fp_orb_files:  

    run_jdata[fp_style=abacus]/fp_orb_files  

        (Argument), 36  

    simplify_jdata[abacus]/fp_orb_files  

        (Argument), 165  

fp_params:  

    run_jdata[fp_style=amber/diff]/fp_params  

        (Argument), 37  

    run_jdata[fp_style=custom]/fp_params (Ar-  

        gument), 39  

    run_jdata[fp_style=gaussian]/fp_params  

        (Argument), 33  

    run_jdata[fp_style=pwscf]/fp_params  

        (Argument), 38  

    run_jdata[fp_style=siesta]/fp_params (Ar-  

        gument), 34  

    simplify_jdata[custom]/fp_params (Argu-  

        ment), 168  

    simplify_jdata[gaussian]/fp_params (Argu-  

        ment), 162  

    simplify_jdata[pwscf]/fp_params (Argu-  

        ment), 167  

    simplify_jdata[siesta]/fp_params (Argu-  

        ment), 164  

fp_pp_files:  

    run_jdata[fp_style=abacus]/fp_pp_files  

        (Argument), 36  

    run_jdata[fp_style=pwscf]/fp_pp_files  

        (Argument), 38  

    run_jdata[fp_style=siesta]/fp_pp_files  

        (Argument), 35  

    run_jdata[fp_style=vasp]/fp_pp_files (Ar-  

        gument), 32  

    simplify_jdata[abacus]/fp_pp_files (Argu-  

        ment), 165  

    simplify_jdata[pwscf]/fp_pp_files (Argu-  

        ment), 166  

    simplify_jdata[siesta]/fp_pp_files (Argu-  

        ment), 165  

    simplify_jdata[vasp]/fp_pp_files (Argu-  

        ment), 161  

fp_pp_path:  

    run_jdata[fp_style=abacus]/fp_pp_path  

        (Argument), 36  

    run_jdata[fp_style=pwscf]/fp_pp_path (Ar-  

        gument), 38  

    run_jdata[fp_style=siesta]/fp_pp_path  

        (Argument), 35  

    run_jdata[fp_style=vasp]/fp_pp_path  

        (Argument), 32  

    simplify_jdata[abacus]/fp_pp_path (Argu-  

        ment), 165  

    simplify_jdata[pwscf]/fp_pp_path (Argu-  

        ment), 166  

    simplify_jdata[siesta]/fp_pp_path (Argu-  

        ment), 164

```

```

simplify_jdata[vasp]/fp_pp_path      (Argument), 161
fp_skip_bad_box:
    run_jdata[fp_style=vasp]/fp_skip_bad_box
        (Argument), 32
    simplify_jdata[vasp]/fp_skip_bad_box (Argument), 162
fp_style:
    run_jdata/fp_style (Argument), 32
    simplify_jdata/fp_style (Argument), 161
fp_style_abacus_args() (in module dp-
    gen.generator.arginfo), 292
fp_style_amber_diff_args() (in module dp-
    gen.generator.arginfo), 293
fp_style_cp2k_args() (in module dp-
    gen.generator.arginfo), 293
fp_style_custom_args() (in module dp-
    gen.generator.arginfo), 293
fp_style_gaussian_args() (in module dp-
    gen.generator.arginfo), 293
fp_style_pwscf_args() (in module dp-
    gen.generator.arginfo), 293
fp_style_siesta_args() (in module dp-
    gen.generator.arginfo), 293
fp_style_variant_type_args() (in module dp-
    gen.generator.arginfo), 293
fp_style_variant_type_args() (in module dp-
    gen.simplify.arginfo), 298
fp_style_vasp_args() (in module dp-
    gen.generator.arginfo), 293
fp_task_max:
    run_jdata/fp_task_max (Argument), 22
    simplify_jdata/fp_task_max (Argument), 160
fp_task_min:
    run_jdata/fp_task_min (Argument), 22
    simplify_jdata/fp_task_min (Argument), 160
fragment_guesses:
    run_jdata[fp_style=gaussian]/fp_params/fragment_
        (Argument), 34
    simplify_jdata[gaussian]/fp_params/fragment_
        (Argument), 163
from_dict() (dpgen.database.DPPotcar class method),
    280
from_dict() (dpgen.database.Entry class method), 280
from_dict() (dpgen.database.entry.Entry class
    method), 284
from_dict() (dpgen.database.vasp.DPPotcar class
    method), 285
from_dict() (dpgen.database.vasp.VaspInput class
    method), 286
from_dict() (dpgen.database.VaspInput static
    method), 286
from_directory() (dpgen.database.VaspInput static
    method), 282
from_file() (dpgen.database.DPPotcar class method),
    280
from_file() (dpgen.database.vasp.DPPotcar class
    method), 285
from_poscar:
    init_bulk_jdata/from_poscar (Argument), 79
    init_surf_jdata/from_poscar (Argument), 97
from_poscar_path:
    init_bulk_jdata/from_poscar_path (Argument),
        79
    init_surf_jdata/from_poscar_path (Argument),
        97
from_system_data() (in module dp-
    gen.auto_test.lib.lmp), 253

```

G

```

Gamma (class in dpgen.auto_test.Gamma), 263
gen_alloy() (in module dpgen.auto_test.gen_confs),
    272
gen_box() (in module dpgen.data.tools.bcc), 273
gen_box() (in module dpgen.data.tools.diamond), 274
gen_box() (in module dpgen.data.tools.fcc), 275
gen_box() (in module dpgen.data.tools.hcp), 275
gen_box() (in module dpgen.data.tools.sc), 276
gen_collect() (in module dpgen.collect.collect), 273
gen_ele_std() (in module dpgen.auto_test.gen_confs),
    272
gen_element() (in module dpgen.auto_test.gen_confs),
    272
gen_element_std() (in module dp-
    gen.auto_test.gen_confs), 272
gen_init_bulk() (in module dpgen.data.gen), 277
gen_init_reaction() (in module dp-
    gen.data.reaction), 278
gen_init_surf() (in module dpgen.data.surf), 278
gen_main() (in module dp-
    gen.generator.lib.run_calypso), 291
gen_random_guesses () (in module dp-
    gen.generator.lib.run_calypso), 291
gen_random_disturb() (in module dp-
    gen.data.tools.create_random_disturb), 274
gen_random_emat() (in module dp-
    gen.data.tools.create_random_disturb), 274
gen_run() (in module dpgen.generator.run), 294
gen_simplify() (in module dpgen.simplify.simplify),
    299
gen_structures() (in module dp-
    gen.generator.lib.run_calypso), 291
gen_sub_iter() (dpgen.tools.auto_gen_param.Iteration
    method), 300
gen_test() (in module dpgen.auto_test.run), 273
general_mdata_arginfo() (in module dpgen.arginfo),
    302

```

general_simplify_arginfo() (in module dp-	gen.generator.lib.abacus_scf), 288
gen.simplify.arginfo), 298	
get_abacus_input_parameters() (in module dp-	gen.generator.lib.abacus_scf), 288
gen.generator.lib.abacus_scf), 288	
get_abacusSTRU() (in module dp-	gen.generator.lib.abacus_scf), 288
gen.generator.lib.abacus_scf), 288	
get_additional_fromSTRU() (in module dp-	gen.generator.lib.abacus_scf), 288
gen.generator.lib.abacus_scf), 288	
get_all_dumped_forces() (in module dp-	gen.generator.lib.lammps), 290
gen.generator.lib.lammps), 290	
get_atom_types() (in module dp-	gen.generator.lib.pwscf), 291
gen.generator.lib.pwscf), 291	
get_atomic_masses() (in module dp-	gen.generator.run), 294
gen.generator.run), 294	
get_atoms() (in module dpigen.auto_test.lib.lmp), 253	
get_atoms_ntypes() (in module dp-	gen.data.tools.io_lammps), 275
gen.data.tools.io_lammps), 275	
get_atype() (in module dpigen.auto_test.lib.lmp), 253	
get_base_area() (in module dp-	gen.auto_test.lib.lammps), 252
gen.auto_test.lib.lammps), 252	
get_basic_param_json() (in module dp-	gen.tools.auto_gen_param), 301
gen.tools.auto_gen_param), 301	
get_block() (in module dpigen.generator.lib.pwscf),	291
291	
get_boxes() (in module dpigen.auto_test.lib.vasp), 258	
get_cell() (in module dpigen.generator.lib.pwscf), 291	
get_coords() (in module dpigen.generator.lib.pwscf),	291
291	
get_dumped_forces() (in module dp-	gen.generator.lib.lammps), 290
gen.generator.lib.lammps), 290	
get_energies() (in module dpigen.auto_test.lib.vasp),	258
258	
get_energy() (in module dpigen.generator.lib.pwscf),	291
291	
get_eos_list() (in module dp-	gen.auto_test.lib.mfp_eosfit), 254
gen.auto_test.lib.mfp_eosfit), 254	
get_eos_list_3p() (in module dp-	gen.auto_test.lib.mfp_eosfit), 254
gen.auto_test.lib.mfp_eosfit), 254	
get_eos_list_4p() (in module dp-	gen.auto_test.lib.mfp_eosfit), 255
gen.auto_test.lib.mfp_eosfit), 255	
get_eos_list_5p() (in module dp-	gen.auto_test.lib.mfp_eosfit), 255
gen.auto_test.lib.mfp_eosfit), 255	
get_eos_list_6p() (in module dp-	gen.auto_test.lib.mfp_eosfit), 255
gen.auto_test.lib.mfp_eosfit), 255	
get_force() (in module dpigen.generator.lib.pwscf),	291
291	
get_init_data_sys() (in module dp-	gen.tools.auto_gen_param), 301
gen.tools.auto_gen_param), 301	
get_job_names() (in module dpigen.generator.run), 294	
get_lmp_info() (in module dpigen.tools.relabel), 302	
get_lmpbox() (in module dpigen.auto_test.lib.lmp), 253	
get_machine_info() (in module dp-	gen.auto_test.lib.util), 258
gen.auto_test.lib.util), 258	
get_mass_fromSTRU() (in module dp-	
gen.generator.lib.abacus_scf), 288	
get_model_devi_jobs() (in module dp-	gen.tools.auto_gen_param), 301
gen.tools.auto_gen_param), 301	
get_multi_system() (in module dp-	gen.simplify.simplify), 299
gen.simplify.simplify), 299	
get_natoms() (in module dpigen.auto_test.lib.lmp), 253	
get_natoms() (in module dpigen.generator.lib.pwscf),	291
291	
get_natoms_fromSTRU() (in module dp-	gen.generator.lib.abacus_scf), 288
gen.generator.lib.abacus_scf), 288	
get_natoms_vec() (in module dpigen.auto_test.lib.lmp),	253
253	
get_natomtypes() (in module dpigen.auto_test.lib.lmp),	253
253	
get_nev() (in module dpigen.auto_test.lib.lammps), 252	
get_nev() (in module dpigen.auto_test.lib.vasp), 258	
get_nframes() (in module dpigen.generator.run), 294	
get_outcar_files() (in module dp-	gen.data.tools.cessp2force_lin), 274
gen.data.tools.cessp2force_lin), 274	
get_poscar_natoms() (in module dp-	gen.auto_test.lib.vasp), 258
gen.auto_test.lib.vasp), 258	
get_poscar_types() (in module dp-	gen.auto_test.lib.vasp), 258
gen.auto_test.lib.vasp), 258	
get_posi() (in module dpigen.auto_test.lib.lmp), 253	
get_stress() (in module dpigen.auto_test.lib.lammps),	252
252	
get_stress() (in module dpigen.auto_test.lib.vasp), 258	
get_stress() (in module dpigen.generator.lib.pwscf),	291
291	
get_structure() (in module dpigen.auto_test.mpdb),	272
272	
get_sub_system() (dp-	gen.tools.auto_gen_param.System method),
300	
get_sys_configs() (in module dp-	gen.tools.auto_gen_param), 301
gen.tools.auto_gen_param), 301	
get_sys_index() (in module dpigen.generator.run), 294	
get_system_cls() (in module dpigen.simplify.simplify),	299
299	
get_system_list() (in module dp-	gen.tools.auto_gen_param), 301
gen.tools.auto_gen_param), 301	
get_typeid() (in module dpigen.data.tools.io_lammps),	275
275	
get_types() (in module dpigen.generator.lib.pwscf),	291
291	
gpu_exclusive:	
init_bulk_mdata/fp/resources[LSF]/kwargs/gpu_exclusive	
(Argument), 92	
init_reaction_mdata/build/resources[LSF]/kwargs/gpu_ex	
(Argument), 138	
init_reaction_mdata/fp/resources[LSF]/kwargs/gpu_exclu	
(Argument), 150	
init_reaction_mdata/reaxff/resources[LSF]/kwargs/gpu_e	
(Argument), 125	

```

init_surf_mdata/fp/resources[LSF]/kwargs/gpu_exclusive_mdata/fp/resources/gpu_per_node
    (Argument), 110                                     (Argument), 199
run_mdata/fp/resources[LSF]/kwargs/gpu_exclusive_mdata/model_devi/resources/gpu_per_node
    (Argument), 75                                     (Argument), 187
run_mdata/model_devi/resources[LSF]/kwargs/gpu_exclusive_mdata/train/resources/gpu_per_node
    (Argument), 63                                     (Argument), 175
run_mdata/train/resources[LSF]/kwargs/gpu_exclusive_usage:
    (Argument), 51                                     init_bulk_mdata/fp/resources[LSF]/kwargs/gpu_usage
simplify_mdata/fp/resources[LSF]/kwargs/gpu_exclusive_usage:
    (Argument), 204                                     (Argument), 91
simplify_mdata/model_devi/resources[LSF]/kwargs/gpu_exclusive_usage:
    (Argument), 192                                     (Argument), 128
simplify_mdata/train/resources[LSF]/kwargs/gpu_exclusive_usage:
    (Argument), 179                                     init_reaction_mdata/build/resources[LSF]/kwargs/gpu_usage
gpu_new_syntax:
    init_bulk_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax:
        (Argument), 92                                     (Argument), 110
    init_reaction_mdata/build/resources[LSF]/kwargs/gpu_new_syntax:
        (Argument), 138                                     (Argument), 74
    init_reaction_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax:
        (Argument), 150                                     (Argument), 62
    init_reaction_mdata/reaxff/resources[LSF]/kwargs/gpu_new_syntax:
        (Argument), 125                                     (Argument), 50
    init_surf_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax:
        (Argument), 110                                     (Argument), 203
run_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax:
    simplify_mdata/model_devi/resources[LSF]/kwargs/gpu_usage
        (Argument), 74                                     (Argument), 192
run_mdata/model_devi/resources[LSF]/kwargs/gpu_new_syntax:
    simplify_mdata/train/resources[LSF]/kwargs/gpu_usage
        (Argument), 63                                     (Argument), 179
run_mdata/train/resources[LSF]/kwargs/gpu_groupsize:
    (Argument), 50                                     init_bulk_mdata/fp/resources/group_size
simplify_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax:
    (Argument), 204                                     (Argument), 87
simplify_mdata/model_devi/resources[LSF]/kwargs/gpu_new_syntax:
    (Argument), 192                                     init_reaction_mdata/build/resources/group_size
simplify_mdata/train/resources[LSF]/kwargs/gpu_new_syntax:
    (Argument), 179                                     (Argument), 121
gpu_per_node:
    init_bulk_mdata/fp/resources/gpu_per_node           init_surf_mdata/fp/resources/group_size
        (Argument), 87                                     (Argument), 105
    init_reaction_mdata/build/resources/gpu_per_node     run_mdata/model_devi/resources/group_size
        (Argument), 133                                     (Argument), 70
    init_reaction_mdata/fp/resources/gpu_per_node         run_mdata/train/resources/group_size
        (Argument), 145                                     (Argument), 58
    init_reaction_mdata/reaxff/resources/gpu_per_node     run_mdata/train/resources/group_size
        (Argument), 120                                     (Argument), 46
    init_surf_mdata/fp/resources/gpu_per_node           simplify_mdata/fp/resources/group_size
        (Argument), 105                                     (Argument), 199
run_mdata/fp/resources/gpu_per_node                 simplify_mdata/model_devi/resources/group_size
        (Argument), 70                                     (Argument), 187
run_mdata/model_devi/resources/gpu_per_node         simplify_mdata/train/resources/group_size
        (Argument), 58                                     (Argument), 175
run_mdata/train/resources/gpu_per_node
        (Argument), 46

```

H

hcp() (*in module dpigen.auto_test.lib.crys*), 252
head_ratio:
 init_surf_jdata/head_ratio (*Argument*), 98
high_level:
 run_jdata[fp_style=amber/diff]/high_level
 (*Argument*), 37
high_level_mdin:
 run_jdata[fp_style=amber/diff]/fp_params/high_level_mdin
 (*Argument*), 37
hostname:
 init_bulk_mdata/fp/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 85
 init_reaction_mdata/build/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 130
 init_reaction_mdata/fp/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 143
 init_reaction_mdata/reaxff/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 118
 init_surf_mdata/fp/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 103
 run_mdata/fp/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 67
 run_mdata/model_devi/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 55
 run_mdata/train/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 43
 simplify_mdata/fp/machine[BohriumContext]/remote_profile/hostname
 (*Argument*), 196
 simplify_mdata/model_devi/machine[BohriumContext]/remote_profile/hostname
 (*Argument*), 183
 simplify_mdata/train/machine[BohriumContext]/remote_profile/hostname
 (*Argument*), 171
 simplify_mdata/fp/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 197
 incar_upper() (*in module dpigen.generator.lib.vasp*),
 292
 simplify_mdata/model_devi/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 184
 simplify_mdata/train/machine[SSHContext]/remote_profile/hostname
 (*Argument*), 172
|
if_cuda_multi_devices:
 init_bulk_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 19
 simplify_jdata/init_batch_size (*Argument*), 156
 init_reaction_mdata/build/resources/resource_strategy/if_cuda_multi_devices/init_bulk_abacus_args()
 (*Argument*), 133
 init_reaction_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/gen_data_arginfo
 (*Argument*), 276
 init_reaction_mdata/reaxff/resources/resource_strategy/if_cuda_multi_devices/init_hulk_jdata
 (*Argument*), 121
 init_surf_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/init_hulk_jdata/cell_type
 (*Argument*), 78
 run_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/init_hulk_jdata/coll_ndata
 (*Argument*), 80
 run_mdata/model_devi/resources/resource_strategy/if_cuda_multi_devices/init_hulk_jdata/elements
 (*Argument*), 78
 run_mdata/train/resources/resource_strategy/if_cuda_multi_devices/init_hulk_jdata/elements
 (*Argument*), 79
 run_mdata/train/resources/resource_strategy/if_cuda_multi_devices/init_hulk_jdata/from_poscar
 (*Argument*), 46
 simplify_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/init_hulk_jdata/init_fp_style
 (*Argument*), 200
 simplify_mdata/model_devi/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 187
 simplify_mdata/train/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 175
 ignore_exit_code:
 init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/hostname
 (*Argument*), 84
 init_reaction_mdata/build/machine[BohriumContext]/remote_profile/hostname
 (*Argument*), 129
 init_reaction_mdata/fp/machine[BohriumContext]/remote_profile/hostname
 (*Argument*), 142
 init_reaction_mdata/reaxff/machine[BohriumContext]/remote_profile/hostname
 (*Argument*), 117
 init_reaction_mdata/fp/machine[BohriumContext]/remote_profile/ignore_exit_code
 (*Argument*), 102
 run_mdata/fp/machine[BohriumContext]/remote_profile/ignore_exit_code
 (*Argument*), 67
 run_mdata/model_devi/machine[BohriumContext]/remote_profile/ignore_exit_code
 (*Argument*), 54
 run_mdata/train/machine[BohriumContext]/remote_profile/ignore_exit_code
 (*Argument*), 43
 simplify_mdata/fp/machine[BohriumContext]/remote_profile/ignore_exit_code
 (*Argument*), 196
 simplify_mdata/model_devi/machine[BohriumContext]/remote_profile/ignore_exit_code
 (*Argument*), 183
 simplify_mdata/train/machine[BohriumContext]/remote_profile/ignore_exit_code
 (*Argument*), 171
 incar_upper() (*in module dpigen.generator.lib.vasp*),
 292
 index_iteration
 (*dp-gen.tools.auto_gen_param.Iteration property*),
 300
 index_system
 (*dp-gen.tools.auto_gen_param.System property*), 301
 info() (*in module dpigen*), 251
 init_batch_size:
 run_jdata/init_batch_size (*Argument*), 19
 simplify_jdata/init_batch_size (*Argument*),
 156
 init_bulk_abacus_args() (*in module dp-gen.data_arginfo*), 276
 init_bulk_jdata (*Argument*)
 init_hulk_jdata/cell_type (*Argument*), 78
 init_hulk_jdata/coll_ndata (*Argument*), 80
 init_hulk_jdata/elements (*Argument*), 78
 init_hulk_jdata/from_poscar (*Argument*), 79
 init_hulk_jdata/from_poscar_path (*Argument*), 79
 init_hulk_jdata/init_fp_style (*Argument*), 200
 from_poscar:
 run_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 187
 simplify_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 175
 from_poscar_path:
 run_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 187
 simplify_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 175
 init_fp_style:
 run_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 187
 simplify_mdata/fp/resources/resource_strategy/if_cuda_multi_devices/run_jdata/init_batch_size
 (*Argument*), 175

```

    init_fp_style:, 80
init_bulk_jdata/md_incar (Argument)
    md_incar:, 79
init_bulk_jdata/md_nstep (Argument)
    md_nstep:, 80
init_bulk_jdata/pert_atom (Argument)
    pert_atom:, 80
init_bulk_jdata/pert_box (Argument)
    pert_box:, 79
init_bulk_jdata/pert numb (Argument)
    pert numb:, 79
init_bulk_jdata/potcars (Argument)
    potcars:, 78
init_bulk_jdata/relax_incar (Argument)
    relax_incar:, 79
init_bulk_jdata/scale (Argument)
    scale:, 79
init_bulk_jdata/skip_relax (Argument)
    skip_relax:, 79
init_bulk_jdata/stages (Argument)
    stages:, 78
init_bulk_jdata/super_cell (Argument)
    super_cell:, 78
init_bulk_jdata/type_map (Argument)
    type_map:, 80
init_bulk_jdata:
    init_bulk_jdata (Argument), 78
init_bulk_jdata_arginfo() (in module dp-
    gen.data.arginfo), 276
init_bulk_jdata[ABACUS]/atom_masses (Argu-
    ment)
    atom_masses:, 81
init_bulk_jdata[ABACUS]/md_kpt (Argument)
    md_kpt:, 80
init_bulk_jdata[ABACUS]/relax_kpt (Argument)
    relax_kpt:, 80
init_bulk_mdata (Argument)
    init_bulk_mdata:, 81
init_bulk_mdata/api_version (Argument)
    api_version:, 81
init_bulk_mdata/deepmd_version (Argument)
    deepmd_version:, 81
init_bulk_mdata/fp (Argument)
    fp:, 81
init_bulk_mdata/fp/command (Argument)
    command:, 81
init_bulk_mdata/fp/machine (Argument)
    machine:, 81
init_bulk_mdata/fp/machine/batch_type (Argu-
    ment)
    batch_type:, 81
init_bulk_mdata/fp/machine/clean_asynchronous
    (Argument)
    clean_asynchronously:, 82
init_bulk_mdata/fp/machine/context_type
    (Argument)
    context_type:, 82
init_bulk_mdata/fp/machine/local_root (Argu-
    ment)
    local_root:, 82
init_bulk_mdata/fp/machine/remote_root (Argu-
    ment)
    remote_root:, 82
init_bulk_mdata/fp/machine[BohriumContext]/remote_profile
    (Argument)
    remote_profile:, 83
init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/
    (Argument)
    email:, 83
init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/
    (Argument)
    ignore_exit_code:, 84
init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/
    (Argument)
    input_data:, 84
init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/
    (Argument)
    keep_backup:, 84
init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/
    (Argument)
    password:, 83
init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/
    (Argument)
    program_id:, 83
init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/
    (Argument)
    retry_count:, 84
init_bulk_mdata/fp/machine[HDFSContext]/remote_profile
    (Argument)
    remote_profile:, 84
init_bulk_mdata/fp/machine[LazyLocalContext]/remote_profile
    (Argument)
    remote_profile:, 83
init_bulk_mdata/fp/machine[LocalContext]/remote_profile
    (Argument)
    remote_profile:, 82
init_bulk_mdata/fp/machine[OpenAPIContext]/remote_profile
    (Argument)
    remote_profile:, 86
init_bulk_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
    remote_profile:, 85
init_bulk_mdata/fp/machine[SSHContext]/remote_profile/host
    (Argument)
    hostname:, 85
init_bulk_mdata/fp/machine[SSHContext]/remote_profile/key_
    (Argument)
    key_filename:, 85

```

```

init_bulk_mdata/fp/machine[SSHContext]/remote_pro
    (Argument)      fidy/look_for_keys:, 89
    look_for_keys:, 86
init_bulk_mdata/fp/machine[SSHContext]/remote_pro
    (Argument)      init_bulk_mdata/fp/resources/number_node (Ar
    passphrase:, 85 gument)
init_bulk_mdata/fp/machine[SSHContext]/remote_pro
    (Argument)      init_bulk_mdata/fp/resources/para_deg (Argu
    password:, 85 ment)
init_bulk_mdata/fp/machine[SSHContext]/remote_pro
    (Argument)      init_bulk_mdata/fp/resources/prepend_script
    port:, 85      (Argument)
init_bulk_mdata/fp/machine[SSHContext]/remote_pro
    (Argument)      init_bulk_mdata/fp/resources/queue_name
    tar_compress:, 86      (Argument)
init_bulk_mdata/fp/machine[SSHContext]/remote_pro
    (Argument)      init_bulk_mdata/fp/resources/source_list (Ar
    timeout:, 86 gument)
init_bulk_mdata/fp/machine[SSHContext]/remote_pro
    (Argument)      init_bulk_mdata/fp/resources/strategy (Argu
    totp_secret:, 86 ment)
init_bulk_mdata/fp/machine[SSHContext]/remote_pro
    (Argument)      init_bulk_mdata/fp/resources/strategy/secret
    username:, 85      (Argument)
init_bulk_mdata/fp/resources (Argument)
    resources:, 87
init_bulk_mdata/fp/resources/append_script
    (Argument)
    append_script:, 89
init_bulk_mdata/fp/resources/batch_type
    (Argument)
    batch_type:, 90
init_bulk_mdata/fp/resources/cpu_per_node
    (Argument)
    cpu_per_node:, 87
init_bulk_mdata/fp/resources/custom_flags
    (Argument)
    custom_flags:, 87
init_bulk_mdata/fp/resources/envs (Argument)
    envs:, 89
init_bulk_mdata/fp/resources/gpu_per_node
    (Argument)
    gpu_per_node:, 87
init_bulk_mdata/fp/resources/group_size
    (Argument)
    group_size:, 87
init_bulk_mdata/fp/resources/module_list (Ar
    gument)
    module_list:, 89
init_bulk_mdata/fp/resources/module_purge
    (Argument)
    module_purge:, 88
init_bulk_mdata/fp/resources/module_unload_list
    (Argument)      gpu_new_syntax:, 92
init_bulk_mdata/fp/resources/number_node (Ar
    gument)
    number_node:, 89
init_bulk_mdata/fp/resources/para_deg (Argu
    ment)
    para_deg:, 88
init_bulk_mdata/fp/resources/prepend_script
    (Argument)
    prepend_script:, 89
init_bulk_mdata/fp/resources/queue_name (Ar
    gument)
    queue_name:, 87
init_bulk_mdata/fp/resources/source_list (Ar
    gument)
    source_list:, 88
init_bulk_mdata/fp/resources/strategy (Argu
    ment)
    strategy:, 87
init_bulk_mdata/fp/resources/strategy/secret
    (Argument)
    secret:, 88
init_bulk_mdata/fp/resources/strategy/customized_script_he
    (Argument)
    customized_script_header_template_file:, 88
init_bulk_mdata/fp/resources/strategy/if_cuda_multi_device
    (Argument)
    if_cuda_multi_devices:, 88
init_bulk_mdata/fp/resources/strategy/ratio_unfinished
    (Argument)
    ratio_unfinished:, 88
init_bulk_mdata/fp/resources/wait_time (Argu
    ment)
    wait_time:, 89
init_bulk_mdata/fp/resources/Bohrium/kwargs
    (Argument)
    kwargs:, 90
init_bulk_mdata/fp/resources/DistributedShell/kwargs
    (Argument)
    kwargs:, 90
init_bulk_mdata/fp/resources/Fugaku/kwargs
    (Argument)
    kwargs:, 90
init_bulk_mdata/fp/resources/LSF/kwargs (Ar
    gument)
    kwargs:, 91
init_bulk_mdata/fp/resources/LSF/kwargs/custom_gpu_line
    (Argument)
    custom_gpu_line:, 92
init_bulk_mdata/fp/resources/LSF/kwargs/gpu_exclusive
    (Argument)
    gpu_exclusive:, 92
init_bulk_mdata/fp/resources/LSF/kwargs/gpu_new_syntax
    (Argument)
    gpu_new_syntax:, 92
init_bulk_mdata/fp/resources/LSF/kwargs/gpu_usage
    (Argument)
    gpu_usage:, 92

```

```

(Argument)
gpu_usage:, 91
init_bulk_mdata/fp/resources[OpenAPI]/kwargs
(Argument)
kwargs:, 90
init_bulk_mdata/fp/resources[PBS]/kwargs (Argument)
kwargs:, 92
init_bulk_mdata/fp/resources[SGE]/kwargs (Argument)
kwargs:, 92
init_bulk_mdata/fp/resources[Shell]/kwargs (Argument)
kwargs:, 92
init_bulk_mdata/fp/resources[SlurmJobArray]/kwargs (Argument)
kwargs:, 91
init_bulk_mdata/fp/resources[SlurmJobArray]/kwargs (Argument)
custom_gpu_line:, 91
init_bulk_mdata/fp/resources[SlurmJobArray]/kwargs (Argument)
slurm_job_size:, 91
init_bulk_mdata/fp/resources[Slurm]/kwargs (Argument)
kwargs:, 91
init_bulk_mdata/fp/resources[Slurm]/kwargs (Argument)
custom_gpu_line:, 91
init_bulk_mdata/fp/resources[Torque]/kwargs (Argument)
kwargs:, 93
init_bulk_mdata/fp/user_backward_files (Argument)
user_backward_files:, 93
init_bulk_mdata/fp/user_forward_files (Argument)
user_forward_files:, 93
init_bulk_mdata:
    init_bulk_mdata (Argument), 81
init_bulk_mdata_arginfo() (in module dp-
    gen.data.arginfo), 276
init_bulk_variant_type_args() (in module dp-
    gen.data.arginfo), 276
init_bulk_vasp_args() (in module dp-
    gen.data.arginfo), 276
init_data_prefix:
    run_jdata/init_data_prefix (Argument), 19
    simplify_jdata/init_data_prefix (Argument),
        156
init_data_sys:
    run_jdata/init_data_sys (Argument), 19
    simplify_jdata/init_data_sys (Argument),
        156
init_fp_style:
    init_bulk_jdata/init_fp_style (Argument),
        80
init_guess() (in module dp-
    gen.auto_test.lib.mfp_eosfit), 255
init_model() (in module dpgen.simplify.simplify), 299
init_pick() (in module dpgen.simplify.simplify), 299
init_pick_number:
    simplify_jdata/init_pick_number (Argument),
        157
init_reaction_jdata (Argument)
    init_reaction_jdata:, 112
init_reaction_jdata/cutoff (Argument)
    cutoff:, 113
init_reaction_jdata/dataset_size (Argument)
    dataset_size:, 114
init_reaction_jdata/qmkeywords (Argument)
    qmkeywords (Argument), 114
init_reaction_jdata/reaxff (Argument)
    reaxff:, 112
init_reaction_jdata/reaxff/control (Argument)
    control:, 113
init_reaction_jdata/reaxff/data (Argument)
    data:, 112
init_reaction_jdata/reaxff/dt (Argument)
    dt:, 113
init_reaction_jdata/reaxff/dump_freq (Argument)
    dump_freq:, 113
init_reaction_jdata/reaxff/ff (Argument)
    ff:, 113
init_reaction_jdata/reaxff/nstep (Argument)
    nstep:, 113
init_reaction_jdata/reaxff/tau_t (Argument)
    tau_t:, 113
init_reaction_jdata/reaxff/temp (Argument)
    temp:, 113
init_reaction_jdata/type_map (Argument)
    type_map:, 112
init_reaction_jdata:
    init_reaction_jdata (Argument), 112
init_reaction_jdata_arginfo() (in module dp-
    gen.data.arginfo), 276
init_reaction_mdata (Argument)
    init_reaction_mdata:, 114
init_reaction_mdata/api_version (Argument)
    api_version:, 114
init_reaction_mdata/build (Argument)
    build:, 127
init_reaction_mdata/build/command (Argument)
    command:, 127
init_reaction_mdata/build/machine (Argument)
    machine:, 127

```

```

init_reaction_mdata/build/machine/batch_type  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
batch_type:, 127                           hostname:, 130
init_reaction_mdata/build/machine/clean_asynchronous  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
clean_asynchronously:, 128                  key_filename:, 131
init_reaction_mdata/build/machine/context_type  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
context_type:, 128                         look_for_keys:, 132
init_reaction_mdata/build/machine/local_root  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
local_root:, 127                           passphrase:, 131
init_reaction_mdata/build/machine/remote_root  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
remote_root:, 127                           password:, 131
init_reaction_mdata/build/machine[BohriumContext]/remote_profile  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
remote_profile:, 129                        port:, 131
init_reaction_mdata/build/machine[BohriumContext]/remote_profile/email  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
email:, 129                               tar_compress:, 132
init_reaction_mdata/build/machine[BohriumContext]/remote_profile/ignore_exit_code  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
ignore_exit_code:, 129                      timeout:, 131
init_reaction_mdata/build/machine[BohriumContext]/remote_profile/input_data  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
input_data:, 130                           totp_secret:, 132
init_reaction_mdata/build/machine[BohriumContext]/remote_profile/keep_backup  init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument)                                (Argument)
keep_backup:, 130                           username:, 131
init_reaction_mdata/build/machine[BohriumContext]/remote_profile/password/resources  (Argument)
    (Argument)                                resources:, 132
password:, 129
init_reaction_mdata/build/machine[BohriumContext]/remote_profile/program_id/resources/append_script  (Argument)
    (Argument)                                append_script:, 135
program_id:, 129
init_reaction_mdata/build/machine[BohriumContext]/remote_profile/retry_count/resources/batch_type  (Argument)
    (Argument)                                batch_type:, 136
retry_count:, 129
init_reaction_mdata/build/machine[HDFSContext]/remote_profile/cpu_per_node  (Argument)
    (Argument)                                cpu_per_node:, 133
remote_profile:, 130
init_reaction_mdata/build/machine[LazyLocalContext]/remote_profile/build/resources/custom_flags  (Argument)
    (Argument)                                custom_flags:, 133
remote_profile:, 128
init_reaction_mdata/build/machine[LocalContext]/remote_profile/build/resources/envs  (Argument)
    (Argument)                                envs:, 135
remote_profile:, 128
init_reaction_mdata/build/machine[OpenAPIContext]/remote_profile/build/resources/gpu_per_node  (Argument)
    (Argument)                                gpu_per_node:, 133
remote_profile:, 132
init_reaction_mdata/build/machine[SSHContext]/remote_profile/group_size  (Argument)
    (Argument)                                group_size:, 133
remote_profile:, 130

```

```

init_reaction_mdata/build/resources/module_list  custom_gpu_line:, 138
    (Argument)                                init_reaction_mdata/build/resources[LSF]/kwargs/gpu_exclus
    module_list:, 135                         (Argument)
init_reaction_mdata/build/resources/module_purge gpu_exclusive:, 138
    (Argument)                                init_reaction_mdata/build/resources[LSF]/kwargs/gpu_new_sy
    module_purge:, 134                        (Argument)
init_reaction_mdata/build/resources/module_unload gpu_isnew_syntax:, 138
    (Argument)                                init_reaction_mdata/build/resources[LSF]/kwargs/gpu_usage
    module_unload_list:, 135                  (Argument)
init_reaction_mdata/build/resources/number_node  gpu_usage:, 138
    (Argument)                                init_reaction_mdata/build/resources[OpenAPI]/kwargs
    number_node:, 133                        (Argument)
init_reaction_mdata/build/resources/para_deg     kwargs:, 136
    (Argument)                                init_reaction_mdata/build/resources[PBS]/kwargs
    para_deg:, 134                          (Argument)
init_reaction_mdata/build/resources/prepend_script kwargs:, 138
    (Argument)                                init_reaction_mdata/build/resources[SGE]/kwargs
    prepend_script:, 135                     (Argument)
init_reaction_mdata/build/resources/queue_name   kwargs:, 139
    (Argument)                                init_reaction_mdata/build/resources[Shell]/kwargs
    queue_name:, 133                        (Argument)
init_reaction_mdata/build/resources/source_list  kwargs:, 138
    (Argument)                                init_reaction_mdata/build/resources[SlurmJobArray]/kwargs
    source_list:, 134                      (Argument)
init_reaction_mdata/build/resources/strategy     kwargs:, 137
    (Argument)                                init_reaction_mdata/build/resources[SlurmJobArray]/kwargs
    strategy:, 133                         (Argument)
init_reaction_mdata/build/resources/strategy/customized_script_header_template_file
    (Argument)                                init_reaction_mdata/build/resources[SlurmJobArray]/kwargs
    customized_script_header_template_file:, 134
    (Argument)                                slurm_job_size:, 137
init_reaction_mdata/build/resources/strategy/if_cuda_multidevices
    (Argument)                                init_reaction_mdata/build/resources[Slurm]/kwargs
    if_cuda_multi_devices:, 133                (Argument)
init_reaction_mdata/build/resources/strategy/ratio_unfinished
    (Argument)                                init_reaction_mdata/build/resources[Slurm]/kwargs/custom_g
    ratio_unfinished:, 134                   custom_gpu_line:, 137
init_reaction_mdata/build/resources/wait_time   init_reaction_mdata/build/resources[Torque]/kwargs
    (Argument)                                (Argument)
    wait_time:, 135                         kwargs:, 139
init_reaction_mdata/build/resources[Bohrium] /kwargs/reaction_mdata/build/user_backward_files
    (Argument)                                (Argument)
    kwargs:, 136                           user_backward_files:, 139
init_reaction_mdata/build/resources[Distributetd] /kwargs/reaction_mdata/build/user_forward_files
    (Argument)                                (Argument)
    kwargs:, 136                           user_forward_files:, 139
init_reaction_mdata/build/resources[Fugaku] /kwargs/reaction_mdata/deepmd_version (Argument)
    (Argument)                                deepmd_version:, 114
    kwargs:, 136                           init_reaction_mdata/fp (Argument)
init_reaction_mdata/build/resources[LSF] /kwargs  fp:, 139
    (Argument)                                init_reaction_mdata/fp/command (Argument)
    kwargs:, 137                           command:, 139
init_reaction_mdata/build/resources[LSF] /kwargs  init_reaction_mdata/fp/machine (Argument)
    (Argument)                                machine:, 139

```

```

init_reaction_mdata/fp/machine/batch_type
    (Argument)
batch_type:, 139
init_reaction_mdata/fp/machine/clean_asynchronous
    (Argument)
clean_asynchronously:, 140
init_reaction_mdata/fp/machine/context_type
    (Argument)
context_type:, 140
init_reaction_mdata/fp/machine/local_root
    (Argument)
local_root:, 140
init_reaction_mdata/fp/machine/remote_root
    (Argument)
remote_root:, 140
init_reaction_mdata/fp/machine[BohriumContext]
    (Argument)
remote_profile:, 141
init_reaction_mdata/fp/machine[BohriumContext]
    (Argument)
email:, 141
init_reaction_mdata/fp/machine[BohriumContext]
    (Argument)
ignore_exit_code:, 142
init_reaction_mdata/fp/machine[BohriumContext]
    (Argument)
input_data:, 142
init_reaction_mdata/fp/machine[BohriumContext]
    (Argument)
keep_backup:, 142
init_reaction_mdata/fp/machine[BohriumContext]
    (Argument)
password:, 141
init_reaction_mdata/fp/machine[BohriumContext]/remote_
    (Argument)
program_id:, 141
init_reaction_mdata/fp/machine[BohriumContext]/remote_
    (Argument)
retry_count
    (Argument)
retry_count:, 142
init_reaction_mdata/fp/machine[HDFSContext]/remote_
    (Argument)
remote_profile:, 142
init_reaction_mdata/fp/machine[LazyLocalContext]/remote_
    (Argument)
remote_profile:, 141
init_reaction_mdata/fp/machine[LocalContext]/remote_
    (Argument)
remote_profile:, 140
init_reaction_mdata/fp/machine[OpenAPIContext]/remote_
    (Argument)
remote_profile:, 145
init_reaction_mdata/fp/machine[SSHContext]/remote_
    (Argument)
remote_profile:, 143
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
hostname:, 143
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
key_filename:, 143
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
look_for_keys:, 144
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
passphrase:, 144
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
password:, 143
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
port:, 143
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
tar_compress:, 144
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
timeout:, 144
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
totp_secret:, 144
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
username:, 143
init_reaction_mdata/fp/resources/append_script
    (Argument)
append_script:, 148
init_reaction_mdata/fp/resources/batch_type
    (Argument)
batch_type:, 148
init_reaction_mdata/fp/resources/cpu_per_node
    (Argument)
cpu_per_node:, 145
init_reaction_mdata/fp/resources/custom_flags
    (Argument)
custom_flags:, 146
init_reaction_mdata/fp/resources/envs
    (Argument)
envs:, 147
init_reaction_mdata/fp/resources/gpu_per_node
    (Argument)
gpu_per_node:, 145
init_reaction_mdata/fp/resources/group_size
    (Argument)
group_size:, 145
init_reaction_mdata/fp/resources/module_list
    (Argument)

```

```

    (Argument)
  module_list:, 147
init_reaction_mdata/fp/resources/module_purge      init_reaction_mdata/fp/resources[LSF]/kwargs/gpu_exclusive
    (Argument)                               (Argument)
  module_purge:, 147                         gpu_exclusive:, 150
init_reaction_mdata/fp/resources/module_unload_list init_reaction_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax
    (Argument)                               (Argument)
  module_unload_list:, 147                   gpu_new_syntax:, 150
init_reaction_mdata/fp/resources/number_node       init_reaction_mdata/fp/resources[LSF]/kwargs/gpu_usage
    (Argument)                               (Argument)
  number_node:, 145                         gpu_usage:, 150
init_reaction_mdata/fp/resources/para_deg         init_reaction_mdata/fp/resources[OpenAPI]/kwargs
    (Argument)                               (Argument)
  para_deg:, 147                           kwargs:, 148
init_reaction_mdata/fp/resources/prepend_script   init_reaction_mdata/fp/resources[PBS]/kwargs
    (Argument)                               (Argument)
  prepend_script:, 148                      kwargs:, 151
init_reaction_mdata/fp/resources/queue_name       init_reaction_mdata/fp/resources[SGE]/kwargs
    (Argument)                               (Argument)
  queue_name:, 145                         kwargs:, 151
init_reaction_mdata/fp/resources/source_list      init_reaction_mdata/fp/resources[Shell]/kwargs
    (Argument)                               (Argument)
  source_list:, 147                         kwargs:, 151
init_reaction_mdata/fp/resources/strategy        init_reaction_mdata/fp/resources[SlurmJobArray]/kwargs
    (Argument)                               (Argument)
  strategy:, 146                           kwargs:, 149
init_reaction_mdata/fp/resources/strategy/customized_script_header_template_file
    (Argument)                               init_reaction_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size
  customized_script_header_template_file:,      slurm_job_size:, 150
  146
init_reaction_mdata/fp/resources/strategy/if_cuda_multi_devices
    (Argument)                               init_reaction_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line
  if_cuda_multi_devices:, 146                 if_cuda_multi_devices:, 149
init_reaction_mdata/fp/resources/strategy/ratio_unfinished
    (Argument)                               init_reaction_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line
  ratio_unfinished:, 146                    custom_gpu_line:, 149
init_reaction_mdata/fp/resources/wait_time       init_reaction_mdata/fp/resources[Torque]/kwargs
    (Argument)                               (Argument)
  wait_time:, 148                          kwargs:, 151
init_reaction_mdata/fp/resources/Bohrium/kwargs
  init_reaction_mdata/fp/user_backward_files
    (Argument)                               (Argument)
  kwargs:, 149                            user_backward_files:, 151
init_reaction_mdata/fp/resources[DistributedShield]/kwargs
  init_reaction_mdata/fp/user_forward_files
    (Argument)                               (Argument)
  kwargs:, 148                            user_forward_files:, 151
init_reaction_mdata/fp/resources[Fugaku]/kwargs
  init_reaction_mdata/reaxff(Argument)
    (Argument)                               reaxff:, 114
  kwargs:, 149                            init_reaction_mdata/reaxff/command(Argument)
init_reaction_mdata/fp/resources[LSF]/kwargs
    (Argument)                               command:, 114
  kwargs:, 150                            init_reaction_mdata/reaxff/machine(Argument)
init_reaction_mdata/fp/resources[LSF]/kwargs
  init_reaction_mdata/reaxff/machine
    (Argument)                               machine:, 115
  custom_gpu_line:, 151                   init_reaction_mdata/reaxff/batch_type
                                         (Argument)
                                         batch_type:, 115

```

```

init_reaction_mdata/reaxff/machine/clean_asynchronously:: 115
    (Argument)
    clean_asynchronously:: 115
        (Argument)
        context_type:: 115
            (Argument)
            local_root:: 115
                (Argument)
                remote_root:: 115
                    (Argument)
                    remote_profile:: 116
                        (Argument)
                        email:: 116
                            (Argument)
                            ignore_exit_code:: 117
                                (Argument)
                                input_data:: 117
                                    (Argument)
                                    keep_backup:: 117
                                        (Argument)
                                        password:: 116
                                            (Argument)
                                            program_id:: 117
                                                (Argument)
                                                retry_count:: 117
                                                    (Argument)
                                                    remote_profile:: 118
                                                        (Argument)
                                                        remote_profile:: 116
                                                            (Argument)
                                                            remote_profile:: 116
                                                                (Argument)
                                                                remote_profile:: 120
                                                                    (Argument)
                                                                    remote_profile:: 118
                                                                        (Argument)
                                                                        hostname:: 118
                                                                            (Argument)
init_reaction_mdata/reaxff/machine/context_type:: 115
    (Argument)
    init_reaction_mdata/reaxff/machine/local_root:: 115
        (Argument)
        init_reaction_mdata/reaxff/machine[BohriumContext]/reaction_profile:: 115
            (Argument)
            remote_profile:: 116
                (Argument)
                email:: 116
                    (Argument)
                    ignore_exit_code:: 117
                        (Argument)
                        input_data:: 117
                            (Argument)
                            keep_backup:: 117
                                (Argument)
                                password:: 116
                                    (Argument)
                                    program_id:: 117
                                        (Argument)
                                        retry_count:: 117
                                            (Argument)
                                            remote_profile:: 118
                                                (Argument)
                                                remote_profile:: 116
                                                    (Argument)
                                                    remote_profile:: 116
                                                        (Argument)
                                                        remote_profile:: 120
                                                            (Argument)
                                                            remote_profile:: 118
                                                                (Argument)
                                                                hostname:: 118
                                                                    (Argument)
init_reaction_mdata/reaxff/machine[SSHContext]/remote_profile:: 115
    (Argument)
    key_filename:: 119
        (Argument)
        look_for_keys:: 120
            (Argument)
            passphrase:: 119
                (Argument)
                password:: 118
                    (Argument)
                    port:: 118
                        (Argument)
                        tar_compress:: 119
                            (Argument)
                            timeout:: 119
                                (Argument)
                                username:: 118
                                    (Argument)
                                    resources:: 120
                                        (Argument)
                                        append_script:: 123
                                            (Argument)
                                            batch_type:: 123
                                                (Argument)
                                                cpu_per_node:: 120
                                                    (Argument)
                                                    custom_flags:: 121
                                                        (Argument)
                                                        envs:: 122
                                                            (Argument)
                                                            gpu_per_node:: 120
                                                                (Argument)
                                                                group_size:: 121
                                                                    (Argument)
                                                                    module_list:: 122
                                                                        (Argument)

```

```

init_reaction_mdata/reaxff/resources/module_purge gpu_exclusive:, 125
    (Argument)                               init_reaction_mdata/reaxff/resources[LSF]/kwargs/gpu_new_s
    module_purge:, 122                      (Argument)
init_reaction_mdata/reaxff/resources/module_unload_list new_syntax:, 125
    (Argument)                               init_reaction_mdata/reaxff/resources[LSF]/kwargs/gpu_usage
    module_unload_list:, 122                (Argument)
init_reaction_mdata/reaxff/resources/number_node gpu_usage:, 125
    (Argument)                               init_reaction_mdata/reaxff/resources[OpenAPI]/kwargs
    number_node:, 120                      (Argument)
init_reaction_mdata/reaxff/resources/para_deg    kwargs:, 123
    (Argument)                               init_reaction_mdata/reaxff/resources[PBS]/kwargs
    para_deg:, 122                         (Argument)
init_reaction_mdata/reaxff/resources/prepend_script kwargs:, 126
    (Argument)                               init_reaction_mdata/reaxff/resources[SGE]/kwargs
    prepend_script:, 123                   (Argument)
init_reaction_mdata/reaxff/resources/queue_name   kwargs:, 126
    (Argument)                               init_reaction_mdata/reaxff/resources[Shell]/kwargs
    queue_name:, 120                      (Argument)
init_reaction_mdata/reaxff/resources/source_list  kwargs:, 126
    (Argument)                               init_reaction_mdata/reaxff/resources[SlurmJobArray]/kwargs
    source_list:, 122                     (Argument)
init_reaction_mdata/reaxff/resources/strategy     kwargs:, 124
    (Argument)                               init_reaction_mdata/reaxff/resources[SlurmJobArray]/kwargs
    strategy:, 121                        (Argument)
init_reaction_mdata/reaxff/resources/strategy/customized_script_header 125
    (Argument)                               init_reaction_mdata/reaxff/resources[SlurmJobArray]/kwargs
    customized_script_header_template_file:
    customized_script_header_template_file:, (Argument)
    121                                     slurm_job_size:, 125
init_reaction_mdata/reaxff/resources/strategy/if_cuda_multi_devices 125
    (Argument)                               init_reaction_mdata/reaxff/resources[Slurm]/kwargs
    if_cuda_multi_devices:, 121             (Argument)
    kwargs:, 124
init_reaction_mdata/reaxff/resources/strategy/init_reaction_mdata/reaxff/resources[Slurm]/kwargs/custom_
    (Argument)                               init_reaction_mdata/reaxff/resources[Slurm]/kwargs/custom_
    ratio_unfinished:, 121                 custom_gpu_line:, 124
init_reaction_mdata/reaxff/resources/wait_time init_reaction_mdata/reaxff/resources[Torque]/kwargs
    (Argument)                               (Argument)
    wait_time:, 123                       kwargs:, 126
init_reaction_mdata/reaxff/resources/Bohrium/ init_reaction_mdata/reaxff/user_backward_files
    (Argument)                               (Argument)
    kwargs:, 124                           user_backward_files:, 127
init_reaction_mdata/reaxff/resources/Distribution/ init_reaction_mdata/reaxff/user_forward_files
    (Argument)                               (Argument)
    kwargs:, 124                           user_forward_files:, 126
init_reaction_mdata/reaxff/resources[Fugaku]/ init_reaction_mdata:
    (Argument)                               init_reaction_mdata (Argument), 114
    kwargs:, 124                           init_reaction_mdata_arginfo() (in module dp-
init_reaction_mdata/reaxff/resources[LSF]/kwargs gen.data.arginfo), 276
    (Argument)                               init_surf_jdata (Argument)
    kwargs:, 125                           init_surf_jdata:, 96
init_reaction_mdata/reaxff/resources[LSF]/kwargs/ init_reaction_mdata/cell_type (Argument)
    custom_gpu_line:, 126                  cell_type:, 96
init_reaction_mdata/reaxff/resources[LSF]/kwargs/ init_reaction_mdata/coll_ndata (Argument)
    gml/exclude, 99                         init_surf_jdata/coll_ndata (Argument)
init_reaction_mdata/reaxff/resources[LSF]/kwargs/ init_reaction_mdata/elements (Argument)
    (Argument)                               init_surf_jdata/elements (Argument)

```

```

elements:, 96
init_surf_jdata/from_poscar (Argument)
    from_poscar:, 97
init_surf_jdata/from_poscar_path (Argument)
    from_poscar_path:, 97
init_surf_jdata/head_ratio (Argument)
    head_ratio:, 98
init_surf_jdata/latt (Argument)
    latt:, 97
init_surf_jdata/layer_numb (Argument)
    layer_numb:, 97
init_surf_jdata/mid_point (Argument)
    mid_point:, 98
init_surf_jdata/millers (Argument)
    millers:, 98
init_surf_jdata/pert_atom (Argument)
    pert_atom:, 99
init_surf_jdata/pert_box (Argument)
    pert_box:, 98
init_surf_jdata/pert_numb (Argument)
    pert_numb:, 98
init_surf_jdata/potcars (Argument)
    potcars:, 96
init_surf_jdata/relax_incar (Argument)
    relax_incar:, 98
init_surf_jdata/scale (Argument)
    scale:, 98
init_surf_jdata/skip_relax (Argument)
    skip_relax:, 98
init_surf_jdata/stages (Argument)
    stages:, 96
init_surf_jdata/super_cell (Argument)
    super_cell:, 97
init_surf_jdata/vacuum_max (Argument)
    vacuum_max:, 97
init_surf_jdata/vacuum_min (Argument)
    vacuum_min:, 97
init_surf_jdata/vacuum_numb (Argument)
    vacuum_numb:, 98
init_surf_jdata/vacuum_resol (Argument)
    vacuum_resol:, 97
init_surf_jdata/z_min (Argument)
    z_min:, 97
init_surf_jdata:
    init_surf_jdata (Argument), 96
init_surf_jdata_arginfo() (in module dp-
    gen.data.arginfo), 276
init_surf_mdata (Argument)
    init_surf_mdata:, 99
init_surf_mdata/api_version (Argument)
    api_version:, 99
init_surf_mdata/deepmd_version (Argument)
    deepmd_version:, 99
init_surf_mdata/fp (Argument)
    fp:, 99
init_surf_mdata/fp/command (Argument)
    command:, 99
init_surf_mdata/fp/machine (Argument)
    machine:, 100
init_surf_mdata/fp/machine/batch_type (Argu-
    ment)
    batch_type:, 100
init_surf_mdata/fp/machine/clean_asynchronously
    (Argument)
    clean_asynchronously:, 100
init_surf_mdata/fp/machine/context_type
    (Argument)
    context_type:, 100
init_surf_mdata/fp/machine/local_root (Argu-
    ment)
    local_root:, 100
init_surf_mdata/fp/machine/remote_root (Argu-
    ment)
    remote_root:, 100
init_surf_mdata/fp/machine[BohriumContext]/remote_profile
    (Argument)
    remote_profile:, 101
init_surf_mdata/fp/machine[BohriumContext]/remote_profile,
    (Argument)
    email:, 101
init_surf_mdata/fp/machine[BohriumContext]/remote_profile,
    (Argument)
    ignore_exit_code:, 102
init_surf_mdata/fp/machine[BohriumContext]/remote_profile,
    (Argument)
    input_data:, 102
init_surf_mdata/fp/machine[BohriumContext]/remote_profile,
    (Argument)
    keep_backup:, 102
init_surf_mdata/fp/machine[BohriumContext]/remote_profile,
    (Argument)
    password:, 102
init_surf_mdata/fp/machine[BohriumContext]/remote_profile,
    (Argument)
    program_id:, 102
init_surf_mdata/fp/machine[BohriumContext]/remote_profile,
    (Argument)
    retry_count:, 102
init_surf_mdata/fp/machine[HDFSContext]/remote_profile
    (Argument)
    remote_profile:, 102
init_surf_mdata/fp/machine[LazyLocalContext]/remote_profile
    (Argument)
    remote_profile:, 101
init_surf_mdata/fp/machine[LocalContext]/remote_profile
    (Argument)
    remote_profile:, 101
init_surf_mdata/fp/machine[OpenAPIContext]/remote_profile

```

```

(Argument)
remote_profile:, 104
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 104
(Argument)
remote_profile:, 103
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 103
(Argument)
hostname:, 103
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 103
(Argument)
key_filename:, 103
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 103
(Argument)
look_for_keys:, 104
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 104
(Argument)
passphrase:, 104
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 104
(Argument)
password:, 103
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 103
(Argument)
port:, 103
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 103
(Argument)
tar_compress:, 104
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 104
(Argument)
timeout:, 104
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 104
(Argument)
totp_secret:, 104
init_surf_mdata/fp/machine[SSHContext]/remote_profile:, 104
(Argument)
username:, 103
init_surf_mdata/fp/resources (Argument)
resources:, 105
init_surf_mdata/fp/resources/append_script
(Argument)
append_script:, 107
init_surf_mdata/fp/resources/batch_type
(Argument)
batch_type:, 108
init_surf_mdata/fp/resources/cpu_per_node
(Argument)
cpu_per_node:, 105
init_surf_mdata/fp/resources/custom_flags
(Argument)
custom_flags:, 105
init_surf_mdata/fp/resources/envs (Argument)
envs:, 107
init_surf_mdata/fp/resources/gpu_per_node
(Argument)
gpu_per_node:, 105
init_surf_mdata/fp/resources/group_size
(Argument)
group_size:, 105
init_surf_mdata/fp/resources/module_list (Argument)
hostname/hostname:, 107
init_surf_mdata/fp/resources/module_purge
(Argument)
keyfilename/keyfilename:, 107
init_surf_mdata/fp/resources/module_unload_list
(Argument)
lookforkeys/lookforkeys:, 107
init_surf_mdata/fp/resources/number_node (Argument)
para_deg (Argument)
password/password:, 105
init_surf_mdata/fp/resources/prepend_script
(Argument)
queue_name (Argument)
source_list (Argument)
strategy (Argument)
totpsecret/totpsecret:, 106
init_surf_mdata/fp/resources/strategy/customized_script_header_template_file:, 106
if_cuda_multi_devices (Argument)
if_cuda_multi_devices:, 106
ratio_unfinished (Argument)
ratio_unfinished:, 106
wait_time (Argument)
wait_time:, 108
init_surf_mdata/fp/resources[Bohrium]/kwargs
(Argument)
kwargs:, 108
init_surf_mdata/fp/resources[DistributedShell]/kwargs
(Argument)
kwargs:, 108
init_surf_mdata/fp/resources[Fugaku]/kwargs
(Argument)
kwargs:, 109
init_surf_mdata/fp/resources[LSF]/kwargs (Argument)

```

kwargs:, 109
`init_surf_mdata/fp/resources[LSF]/kwargs/custom_gpu_line:` (Argument), 84
`custom_gpu_line:, 110`
`init_surf_mdata/fp/resources[LSF]/kwargs/gpu_exclusive:` (Argument), 142
`gpu_exclusive:, 110`
`init_surf_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax:` (Argument), 117
`gpu_new_syntax:, 110`
`init_surf_mdata/fp/resources[LSF]/kwargs/gpu_usage:` (Argument), 102
`gpu_usage:, 110`
`init_surf_mdata/fp/resources[OpenAPI]/kwargs:` (Argument), 108
`kwargs:, 108`
`init_surf_mdata/fp/resources[PBS]/kwargs:` (Argument), 110
`kwargs:, 110`
`init_surf_mdata/fp/resources[SGE]/kwargs:` (Argument), 111
`kwargs:, 111`
`init_surf_mdata/fp/resources[Shell]/kwargs:` (Argument), 39
`kwargs:, 110`
`init_surf_mdata/fp/resources[SlurmJobArray]/kwargs:` (Argument), 168
`kwargs:, 109`
`init_surf_mdata/fp/resources[SlurmJobArray]/kwargs/custom_gpu_line:` (Argument), 39
`custom_gpu_line:, 109`
`init_surf_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size:` (Argument), 268
`slurm_job_size:, 109`
`init_surf_mdata/fp/resources[Slurm]/kwargs:` (Argument), 290
`kwargs:, 109`
`init_surf_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line:` (Argument), 252
`custom_gpu_line:, 109`
`init_surf_mdata/fp/resources[Torque]/kwargs:` (Argument), 252
`kwargs:, 111`
`init_surf_mdata/fp/user_backward_files:` (Argument), 275
`user_backward_files:, 111`
`init_surf_mdata/fp/user_forward_files:` (Argument), 157
`user_forward_files:, 111`
`init_surf_mdata:`
`init_surf_mdata (Argument), 99`
`init_surf_mdata_arginfo() (in module dp-gen.data.tools.arginfo), 276`
`input_data:`
`init_bulk_mdata/fp/machine[BohriumContext]/remote_profile (Argument), 130`
`init_reaction_mdata/build/machine[BohriumContext]/remote_profile (Argument), 142`
`init_reaction_mdata/reaxff/machine[BohriumContext]/remote_profile (Argument), 117`
`init_surf_mdata/fp/machine[BohriumContext]/remote_profile (Argument), 102`
`run_mdata/model_devi/machine[BohriumContext]/remote_profile (Argument), 55`
`run_mdata/train/machine[BohriumContext]/remote_profile (Argument), 43`
`simplify_mdata/fp/machine[BohriumContext]/remote_profile (Argument), 196`
`simplify_mdata/model_devi/machine[BohriumContext]/remote_profile (Argument), 184`
`simplify_mdata/train/machine[BohriumContext]/remote_profile (Argument), 172`
`input_fmt:`
`run_jdata[fp_style=custom]/fp_params/input_fmt (Argument), 39`
`input_fn:`
`simplify_jdata[custom]/fp_params/input_fn (Argument), 168`
`input_upper(): (in module dpigen.generator.lib.pwmat), 290`
`insert_data(): (in module dpigen.auto_test.lib.util), 258`
`inter_deepmd(): (in module dp-gen.auto_test.lib.lammps), 252`
`inter_eam_loy(): (in module dp-gen.auto_test.lib.lammps), 252`
`inter_eam_fs(): (in module dp-gen.auto_test.lib.lammps), 252`
`inter_mean(): (in module dpigen.auto_test.lib.lammps), 252`
`Interstitial (class in dpigen.auto_test.Interstitial), 264`
`is_upper_triangular(): (in module dp-gen.data.tools.io_lammps), 275`
`iter_pick_number:`
`simplify_jdata/iter_pick_number (Argument), 157`
`Iteration (class in dpigen.tools.auto_gen_param), 300`
`iterdict(): (in module dpigen.generator.lib.cp2k), 289`

K

`k_points:`

run_jdata[fp_style=abacus]/k_points (Argument), 162
 (Argument), 37
 simplify_jdata[abacus]/k_points (Argument), 166
 keep_backup:
 init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/keep_backup (Argument), 84
 kspacing:
 init_reaction_mdata/build/machine[BohriumContext]/remote_profile/keep_backup (Argument), 130
 init_reaction_mdata/fp/machine[BohriumContext]/remote_profile/keep_backup (Argument), 142
 init_reaction_mdata/reaxff/machine[BohriumContext]/remote_profile/keep_backup (Argument), 117
 init_surf_mdata/fp/machine[BohriumContext]/remote_profile/keep_backup (Argument), 102
 run_mdata/fp/machine[BohriumContext]/remote_profile/keep_backup (Argument), 67
 run_mdata/model_devi/machine[BohriumContext]/remote_profile/keep_backup (Argument), 55
 run_mdata/train/machine[BohriumContext]/remote_profile/keep_backup (Argument), 43
 simplify_mdata/fp/machine[BohriumContext]/remote_profile/keep_backup (Argument), 196
 simplify_mdata/model_devi/machine[BohriumContext]/remote_profile/keep_backup (Argument), 184
 simplify_mdata/train/machine[BohriumContext]/remote_profile/keep_backup (Argument), 172
 key_filename:
 init_bulk_mdata/fp/machine[SSHContext]/remote_profile/key_filename/resources[SGE]/kwargs (Argument), 85
 init_reaction_mdata/build/machine[SSHContext]/remote_profile/key_filename/resources[Shell]/kwargs (Argument), 131
 init_reaction_mdata/fp/machine[SSHContext]/remote_profile/key_filename/resources[SlurmJobArray]/kwargs (Argument), 143
 init_reaction_mdata/reaxff/machine[SSHContext]/remote_profile/key_filename/resources[Slurm]/kwargs (Argument), 119
 init_surf_mdata/fp/machine[SSHContext]/remote_profile/key_filename/resources[Torque]/kwargs (Argument), 103
 run_mdata/fp/machine[SSHContext]/remote_profile/key_filename/build/resources[Bohrium]/kwargs (Argument), 68
 run_mdata/model_devi/machine[SSHContext]/remote_profile/key_filename/build/resources[DistributedShell]/kwargs (Argument), 56
 run_mdata/train/machine[SSHContext]/remote_profile/key_filename/build/resources[Fugaku]/kwargs (Argument), 44
 simplify_mdata/fp/machine[SSHContext]/remote_profile/key_filename/build/resources[LSF]/kwargs (Argument), 197
 simplify_mdata/model_devi/machine[SSHContext]/remote_profile/key_filename/build/resources[OpenAPI]/kwargs (Argument), 185
 simplify_mdata/train/machine[SSHContext]/remote_profile/key_filename/build/resources[PBS]/kwargs (Argument), 173
 keywords:
 run_jdata[fp_style=gaussian]/fp_params/keywords (Argument), 33
 simplify_jdata[gaussian]/fp_params/keywords (Argument), 138

```

init_reaction_mdata/build/resources[SlurmJobArray]/kwarg mdata/fp/resources[Fugaku]/kwargs
    (Argument), 137                               (Argument), 109
init_reaction_mdata/build/resources[Slurm]/kwarg init_surf_mdata/fp/resources[LSF]/kwargs
    (Argument), 137                               (Argument), 109
init_reaction_mdata/build/resources[Torque]/kwarg init_surf_mdata/fp/resources[OpenAPI]/kwargs
    (Argument), 139                               (Argument), 108
init_reaction_mdata/fp/resources[Bohrium]/kwarg init_surf_mdata/fp/resources[PBS]/kwargs
    (Argument), 149                               (Argument), 110
init_reaction_mdata/fp/resources[DistributedShell]/kwarg init_surf_mdata/fp/resources[SGE]/kwargs
    (Argument), 148                               (Argument), 111
init_reaction_mdata/fp/resources[Fugaku]/kwarg init_surf_mdata/fp/resources[Shell]/kwargs
    (Argument), 149                               (Argument), 110
init_reaction_mdata/fp/resources[LSF]/kwargs  init_surf_mdata/fp/resources[SlurmJobArray]/kwargs
    (Argument), 150                               (Argument), 109
init_reaction_mdata/fp/resources[OpenAPI]/kwarg init_surf_mdata/fp/resources[Slurm]/kwargs
    (Argument), 148                               (Argument), 109
init_reaction_mdata/fp/resources[PBS]/kwargs  init_surf_mdata/fp/resources[Torque]/kwargs
    (Argument), 151                               (Argument), 111
init_reaction_mdata/fp/resources[SGE]/kwargs  run_mdata/fp/resources[Bohrium]/kwargs
    (Argument), 151                               (Argument), 73
init_reaction_mdata/fp/resources[Shell]/kwargs run_mdata/fp/resources[DistributedShell]/kwargs
    (Argument), 151                               (Argument), 73
init_reaction_mdata/fp/resources[SlurmJobArray]/kwarg mdata/fp/resources[Fugaku]/kwargs
    (Argument), 149                               (Argument), 73
init_reaction_mdata/fp/resources[Slurm]/kwarg run_mdata/fp/resources[LSF]/kwargs (Argu-
    (Argument), 149                               ment), 74
init_reaction_mdata/fp/resources[Torque]/kwarg sun_mdata/fp/resources[OpenAPI]/kwargs
    (Argument), 151                               (Argument), 73
init_reaction_mdata/reaxff/resources[Bohrium]/kwarg mdata/fp/resources[PBS]/kwargs (Argu-
    (Argument), 124                               ment), 75
init_reaction_mdata/reaxff/resources[DistributedShell]/kwarg mdata/fp/resources[SGE]/kwargs (Argu-
    (Argument), 124                               ment), 75
init_reaction_mdata/reaxff/resources[Fugaku]/kwarg mdata/fp/resources[Shell]/kwargs (Ar-
    (Argument), 124                               gument), 75
init_reaction_mdata/reaxff/resources[LSF]/kwarg sun_mdata/fp/resources[SlurmJobArray]/kwargs
    (Argument), 125                               (Argument), 74
init_reaction_mdata/reaxff/resources[OpenAPI]/kwarg mdata/fp/resources[Slurm]/kwargs (Ar-
    (Argument), 123                               gument), 73
init_reaction_mdata/reaxff/resources[PBS]/kwarg sun_mdata/fp/resources[Torque]/kwargs
    (Argument), 126                               (Argument), 75
init_reaction_mdata/reaxff/resources[SGE]/kwarg sun_mdata/model_devi/resources[Bohrium]/kwargs
    (Argument), 126                               (Argument), 61
init_reaction_mdata/reaxff/resources[Shell]/kwarg sun_mdata/model_devi/resources[DistributedShell]/kwargs
    (Argument), 126                               (Argument), 61
init_reaction_mdata/reaxff/resources[SlurmJobArray]/kwarg mdata/model_devi/resources[Fugaku]/kwargs
    (Argument), 124                               (Argument), 61
init_reaction_mdata/reaxff/resources[Slurm]/kwarg sun_mdata/model_devi/resources[LSF]/kwargs
    (Argument), 124                               (Argument), 62
init_reaction_mdata/reaxff/resources[Torque]/kwarg mdata/model_devi/resources[OpenAPI]/kwargs
    (Argument), 126                               (Argument), 61
init_surf_mdata/fp/resources[Bohrium]/kwarg run_mdata/model_devi/resources[PBS]/kwargs
    (Argument), 108                               (Argument), 63
init_surf_mdata/fp/resources[DistributedShell]/kwarg mdata/model_devi/resources[SGE]/kwargs
    (Argument), 108                               (Argument), 63

```

```

run_mdata/model_devi/resources[Shell]/kwargs  simplify_mdata/model_devi/resources[DistributedShell]/
    (Argument), 63                                (Argument), 190
run_mdata/model_devi/resources[SlurmJobArray]/kwargs  simplify_mdata/model_devi/resources[Fugaku]/kwargs
    (Argument), 62                                (Argument), 190
run_mdata/model_devi/resources[Slurm]/kwargs  simplify_mdata/model_devi/resources[LSF]/kwargs
    (Argument), 61                                (Argument), 191
run_mdata/model_devi/resources[Torque]/kwargs  simplify_mdata/model_devi/resources[OpenAPI]/kwargs
    (Argument), 64                                (Argument), 190
run_mdata/train/resources[Bohrium]/kwargs  simplify_mdata/model_devi/resources[PBS]/kwargs
    (Argument), 49                                (Argument), 192
run_mdata/train/resources[DistributedShell]/kwargs  simplify_mdata/model_devi/resources[SGE]/kwargs
    (Argument), 49                                (Argument), 193
run_mdata/train/resources[Fugaku]/kwargs  simplify_mdata/model_devi/resources[Shell]/kwargs
    (Argument), 49                                (Argument), 192
run_mdata/train/resources[LSF]/kwargs  simplify_mdata/model_devi/resources[SlurmJobArray]/kwargs
    (Argument), 50                                (Argument), 191
run_mdata/train/resources[OpenAPI]/kwargs  simplify_mdata/model_devi/resources[Slurm]/kwargs
    (Argument), 49                                (Argument), 191
run_mdata/train/resources[PBS]/kwargs  simplify_mdata/model_devi/resources[Torque]/kwargs
    (Argument), 51                                (Argument), 193
run_mdata/train/resources[SGE]/kwargs  simplify_mdata/train/resources[Bohrium]/kwargs
    (Argument), 51                                (Argument), 178
run_mdata/train/resources[Shell]/kwargs  simplify_mdata/train/resources[DistributedShell]/kwargs
    (Argument), 51                                (Argument), 178
run_mdata/train/resources[SlurmJobArray]/kwargs  simplify_mdata/train/resources[Fugaku]/kwargs
    (Argument), 50                                (Argument), 178
run_mdata/train/resources[Slurm]/kwargs  simplify_mdata/train/resources[LSF]/kwargs
    (Argument), 49                                (Argument), 179
run_mdata/train/resources[Torque]/kwargs  simplify_mdata/train/resources[OpenAPI]/kwargs
    (Argument), 51                                (Argument), 177
simplify_mdata/fp/resources[Bohrium]/kwargs  simplify_mdata/train/resources[PBS]/kwargs
    (Argument), 202                                (Argument), 180
simplify_mdata/fp/resources[DistributedShell]/kwargs  simplify_mdata/train/resources[SGE]/kwargs
    (Argument), 202                                (Argument), 180
simplify_mdata/fp/resources[Fugaku]/kwargs  simplify_mdata/train/resources[Shell]/kwargs
    (Argument), 202                                (Argument), 180
simplify_mdata/fp/resources[LSF]/kwargs  simplify_mdata/train/resources[SlurmJobArray]/kwargs
    (Argument), 203                                (Argument), 178
simplify_mdata/fp/resources[OpenAPI]/kwargs  simplify_mdata/train/resources[Slurm]/kwargs
    (Argument), 202                                (Argument), 178
simplify_mdata/fp/resources[PBS]/kwargs  simplify_mdata/train/resources[Torque]/kwargs
    (Argument), 204                                (Argument), 180
simplify_mdata/fp/resources[SGE]/kwargs  L
    (Argument), 204                                labeled:
simplify_mdata/fp/resources[Shell]/kwargs  simplify_jdata/labeled (Argument), 157
    (Argument), 204
simplify_mdata/fp/resources[SlurmJobArray]/kwargs  Lammps (class in dpgen.auto_test.Lammps), 264
    (Argument), 203                                latt:
simplify_mdata/fp/resources[Slurm]/kwargs  init_surf_jdata/latt (Argument), 97
    (Argument), 203                                layer numb:
simplify_mdata/fp/resources[Torque]/kwargs  init_surf_jdata/layer numb (Argument), 97
    (Argument), 205                                Li4p() (in module dpgen.auto_test.lib.mfp_eosfit), 254
simplify_mdata/model_devi/resources[Bohrium]/kwargs  Input() (in module dpgen.data.reaction), 278
    (Argument), 190                                link_pp_files() (in module dpgen.tools.relabel), 302

```

link_reaxff() (in module `dpgen.data.reaction`), 278
 link_trj() (in module `dpgen.data.reaction`), 278
 lmp:
 `run_jdata[model_devi_engine=lammps]/model_devis`
 (`Argument`), 23
 `run_jdata[model_devi_engine=lammps]/model_devis`
 (`Argument`), 23
`lmpbox2box()` (in module `dpgen.auto_test.lib.lmp`), 253
`load_file()` (in module `dpgen.util`), 304
`local_root`:
 `init_bulk_mdata/fp/machine/local_root`
 (`Argument`), 82
 `init_reaction_mdata/build/machine/local_root`
 (`Argument`), 127
 `init_reaction_mdata/fp/machine/local_root`
 (`Argument`), 140
 `init_reaction_mdata/reaxff/machine/local_root`
 (`Argument`), 115
 `init_surf_mdata/fp/machine/local_root`
 (`Argument`), 100
 `run_mdata/fp/machine/local_root` (`Argument`), 64
 `run_mdata/model_devi/machine/local_root`
 (`Argument`), 52
 `run_mdata/train/machine/local_root` (`Argument`), 41
 `simplify_mdata/fp/machine/local_root` (`Argument`), 194
 `simplify_mdata/model_devi/machine/local_root`
 (`Argument`), 181
 `simplify_mdata/train/machine/local_root`
 (`Argument`), 169
`LOG4()` (in module `dpgen.auto_test.lib.mfp_eosfit`), 253
`LOG5()` (in module `dpgen.auto_test.lib.mfp_eosfit`), 254
`log_iter()` (in module `dpgen.auto_test.lib.utils`), 258
`log_iter()` (in module `dpgen.generator.lib.utils`), 292
`log_task()` (in module `dpgen.auto_test.lib.utils`), 258
`log_task()` (in module `dpgen.generator.lib.utils`), 292
`look_for_keys`:
 `init_bulk_mdata/fp/machine[SSHContext]`
 (`Argument`), 86
 `init_reaction_mdata/build/machine[SSHContext]`
 (`Argument`), 132
 `init_reaction_mdata/fp/machine[SSHContext]`
 (`Argument`), 144
 `init_reaction_mdata/reaxff/machine[SSHContext]`
 (`Argument`), 120
 `init_surf_mdata/fp/machine[SSHContext]`
 (`Argument`), 104
 `run_mdata/fp/machine[SSHContext]`
 (`Argument`), 69
 `run_mdata/model_devi/machine[SSHContext]`
 (`Argument`), 57
 `run_mdata/train/machine[SSHContext]`
 (`Argument`), 202
`(Argument)`, 45
`simplify_mdata/fp/machine[SSHContext]`
 (`Argument`), 186
`simplify_mdata/fp/machine[SSHContext]`
 (`Argument`), 174
`low_level`:
 `run_jdata[model_devi_engine=amber]/low_level`
 (`Argument`), 30
`low_level_mdin`:
 `run_jdata[fp_style=amber/diff]/fp_params/low_level_mdi`
 (`Argument`), 38
`lsqfit_eos()` (in module `gen.auto_test.lib.mfp_eosfit`), 255

M

machine:
 `init_bulk_mdata/fp/machine` (`Argument`), 81
 `init_reaction_mdata/build/machine` (`Argument`), 127
 `init_reaction_mdata/fp/machine` (`Argument`), 139
 `init_reaction_mdata/reaxff/machine` (`Argument`), 115
 `init_surf_mdata/fp/machine` (`Argument`), 100
 `run_mdata/fp/machine` (`Argument`), 64
 `run_mdata/model_devi/machine` (`Argument`), 52
 `run_mdata/train/machine` (`Argument`), 40
 `simplify_mdata/fp/machine` (`Argument`), 193
 `simplify_mdata/model_devi/machine` (`Argument`), 181
 `simplify_mdata/train/machine` (`Argument`), 169
`main()` (in module `dpgen.main`), 303
`main_parser()` (in module `dpgen.main`), 303
`make_abacus_md()` (in module `dpgen.data.gen`), 277
`make_abacus_relax()` (in module `dpgen.data.gen`), 277
`make_abacus_scf_input()` (in module `dpgen.generator.lib.abacus_scf`), 288
`make_abacus_scf_kpt()` (in module `dpgen.generator.lib.abacus_scf`), 288
`make_abacus_scf_stru()` (in module `dpgen.generator.lib.abacus_scf`), 288
`make_calculator()` (in module `dpgen.generator.lib.calculator`), 271
`make_calypso_input()` (in module `dpgen.generator.lib.make_calypso`), 290
`make_combines()` (in module `dpgen.data.gen`), 277
`make_combines()` (in module `dpgen.data.surf`), 278
`make_confs()` (`dpgen.auto_test.Elastic.Elastic method`), 202
`make_confs()` (`dpgen.auto_test.EOS.EOS method`), 261

make_confs() (dpgen.auto_test.Gamma.Gamma method), 263
 make_confs() (dpgen.auto_test.Interstitial.Interstitial method), 264
 make_confs() (dpgen.auto_test.Property.Property method), 266
 make_confs() (dpgen.auto_test.Surface.Surface method), 267
 make_confs() (dpgen.auto_test.Vacancy.Vacancy method), 271
 make_cp2k_input() (in module dpgen.generator.lib.cp2k), 289
 make_cp2k_input_from_external() (in module dpgen.generator.lib.cp2k), 289
 make_cp2k_xyz() (in module dpgen.generator.lib.cp2k), 289
 make_equi() (in module dpgen.auto_test.common_equi), 272
 make_fp() (in module dpgen.generator.run), 294
 make_fp() (in module dpgen.simplify.simplify), 299
 make_fp_abacus_scf() (in module dpgen.generator.lib.abacus_scf), 294
 make_fp_amber_diff() (in module dpgen.generator.run), 294
 make_fp_calculation() (in module dpgen.generator.run), 295
 make_fp_configs() (in module dpgen.generator.lib.simplify.simplify), 299
 make_fp_cp2k() (in module dpgen.generator.run), 295
 make_fp_custom() (in module dpgen.generator.run), 295
 make_fp_gaussian() (in module dpgen.generator.run), 296
 make_fp_labeled() (in module dpgen.generator.lib.simplify.simplify), 299
 make_fp_pwmat() (in module dpgen.generator.run), 296
 make_fp_pwscf() (in module dpgen.generator.run), 296
 make_fp_siesta() (in module dpgen.generator.run), 296
 make_fp_task_name() (in module dpgen.generator.run), 296
 make_fp_vasp() (in module dpgen.generator.run), 296
 make_fp_vasp_cp_cvasp() (in module dpgen.generator.run), 296
 make_fp_vasp_incar() (in module dpgen.generator.run), 296
 make_fp_vasp_kp() (in module dpgen.generator.run), 296
 make_gaussian_input() (in module dpgen.generator.lib.gaussian), 290
 make_input_file() (dpgen.auto_test.ABACUS.ABACUS method), 260
 make_input_file() (dpgen.auto_test.Lammps.Lammps method), 265
 make_input_file() (dpgen.auto_test.Task.Task method), 269
 make_input_file() (dpgen.auto_test.VASP.VASP method), 270
 make_iter_name() (in module dpgen.generator.lib.utils), 258
 make_iter_name() (in module dpgen.generator.lib.utils), 292
 make_kspacing_kpoints() (in module dpgen.generator.lib.vasp), 258
 make_kspacing_kpoints_stru() (in module dpgen.generator.lib.abacus_scf), 288
 make_kspacing_kpt() (in module dpgen.generator.lib.abacus), 251
 make_lammps_elastic() (in module dpgen.generator.lib.lammps), 253
 make_lammps_equi() (in module dpgen.generator.lib.lammps), 253
 make_lammps_eval() (in module dpgen.generator.lib.lammps), 253
 make_lammps_input() (in module dpgen.generator.lib.lammps), 290
 make_lammps_phonon() (in module dpgen.generator.lib.lammps), 253
 make_lammps_press_relax() (in module dpgen.generator.lib.lammps), 253
 make_lmp() (in module dpgen.data.reaction), 278
 make_model_devi() (in module dpgen.generator.run), 296
 make_model_devi() (in module dpgen.generator.lib.simplify.simplify), 299
 make_model_devi_conf_name() (in module dpgen.generator.run), 296
 make_model_devi_task_name() (in module dpgen.generator.run), 296
 make_path_mp() (in module dpgen.generator.lib.gen_confs), 272
 make_potential_files() (dpgen.generator.lib.ABACUS.ABACUS method), 260
 make_potential_files() (dpgen.generator.lib.Lammps.Lammps method), 265
 make_potential_files() (dpgen.generator.lib.Task.Task method), 269
 make_potential_files() (dpgen.generator.lib.VASP.VASP method), 270
 make_property() (in module dpgen.generator.lib.common_prop), 272
 make_property_instance() (in module dpgen.generator.lib.common_prop), 272
 make_pwmat_input() (in module dpgen.generator.run), 296

make_pwmat_input_dict() (in module `dp-gen.generator.lib.pwmat`), 290
make_pwmat_input_user_dict() (in module `dp-gen.generator.lib.pwmat`), 290
make_pwscf() (in module `dpgen.tools.relabel`), 302
make_pwscf_01_runctrl_dict() (in module `dp-gen.generator.lib.pwscf`), 291
make_pwscf_input() (in module `dp-gen.auto_test.lib.pwscf`), 257
make_pwscf_input() (in module `dp-gen.generator.lib.pwscf`), 291
make_refine() (in module `dpgen.auto_test.refine`), 272
make_repro() (in module `dpgen.auto_test.reproduce`), 273
make_scale() (in module `dpgen.data.gen`), 277
make_scale() (in module `dpgen.data.surf`), 278
make_scale_ABACUS() (in module `dpgen.data.gen`), 277
make_siesta() (in module `dpgen.tools.relabel`), 302
make_siesta_input() (in module `dp-gen.auto_test.lib.siesta`), 258
make_siesta_input() (in module `dp-gen.generator.lib.siesta`), 291
make_submission() (in module `dp-gen.dispatcher.Dispatcher`), 287
make_submission_compat() (in module `dp-gen.dispatcher.Dispatcher`), 287
make_super_cell() (in module `dpgen.data.gen`), 277
make_super_cell_ABACUS() (in module `dp-gen.data.gen`), 277
make_super_cell_poscar() (in module `dp-gen.data.gen`), 277
make_super_cell_pymatgen() (in module `dp-gen.data.surf`), 278
make_super_cell_STRU() (in module `dpgen.data.gen`), 277
make_supercell_abacus() (in module `dp-gen.generator.lib.abacus_scf`), 288
make_train() (in module `dpgen.generator.run`), 296
make_unit_cell() (in module `dpgen.data.gen`), 277
make_unit_cell() (in module `dpgen.data.surf`), 279
make_unit_cell_ABACUS() (in module `dp-gen.data.gen`), 277
make_vasp() (in module `dpgen.tools.relabel`), 302
make_vasp_incar() (in module `dpgen.generator.run`), 296
make_vasp_incar() (in module `dpgen.tools.relabel`), 302
make_vasp_incar_ele_temp() (in module `dp-gen.generator.run`), 296
make_vasp_incar_user_dict() (in module `dp-gen.generator.lib.vasp`), 292
make_vasp_kpoints() (in module `dp-gen.auto_test.lib.vasp`), 259
make_vasp_kpoints_from_incar() (in module `dp-`
`gen.auto_test.lib.vasp`), 259
make_vasp_md() (in module `dpgen.data.gen`), 277
make_vasp_phonon_incar() (in module `dp-gen.auto_test.lib.vasp`), 259
make_vasp_relax() (in module `dpgen.data.gen`), 277
make_vasp_relax() (in module `dpgen.data.surf`), 279
make_vasp_relax_incar() (in module `dp-gen.auto_test.lib.vasp`), 259
make_vasp_static_incar() (in module `dp-gen.auto_test.lib.vasp`), 259
make_work_path() (in module `dpgen.auto_test.lib.util`), 258
mass_map:
 run_jdata/mass_map (*Argument*), 18
 simplify_jdata/mass_map (*Argument*), 156
mBM4() (in module `dpgen.auto_test.lib.mfp_eosfit`), 255
mBM4poly() (in module `dpgen.auto_test.lib.mfp_eosfit`), 255
mBM5() (in module `dpgen.auto_test.lib.mfp_eosfit`), 255
mBM5poly() (in module `dpgen.auto_test.lib.mfp_eosfit`), 255
md_incar:
 init_bulk_jdata/md_incar (*Argument*), 79
md_kpt:
 init_bulk_jdata[ABACUS]/md_kpt (*Argument*), 80
md_nstep:
 init_bulk_jdata/md_nstep (*Argument*), 80
mdata_arginfo() (in module `dp-gen.dispatcher.Dispatcher`), 288
mdin:
 run_jdata[model_devi_engine=amber]/mdin (*Argument*), 30
mdin_prefix:
 run_jdata[model_devi_engine=amber]/mdin_prefix (*Argument*), 30
mid_point:
 init_surf_jdata/mid_point (*Argument*), 98
mie() (in module `dpgen.auto_test.lib.mfp_eosfit`), 255
mie_simple() (in module `dp-gen.auto_test.lib.mfp_eosfit`), 255
millers:
 init_surf_jdata/millers (*Argument*), 98
mixingWeight:
 run_jdata[fp_style=siesta]/fp_params/mixingWeight (*Argument*), 35
 simplify_jdata[siesta]/fp_params/mixingWeight (*Argument*), 164
model_devi:
 run_mdata/model_devi (*Argument*), 52
 simplify_mdata/model_devi (*Argument*), 181
model_devi_activation_func:
 run_jdata/model_devi_activation_func (*Argument*), 21

```

simplify_jdata/model_devi_activation_func      gen.generator.arginfo), 293
    (Argument), 160
model_devi_adapt_trust_lo:                   model_devi_lmp_args()   (in     module     dp-
                                                gen.generator.arginfo), 293
run_jdata[model_devi_engine=lammps]/model_devi_devi_merge_inaj:           run_jdata[model_devi_engine=lammps]/model_devi_merge_t
    (Argument), 27
model_devi_amber_args()   (in     module     dp-          (Argument), 28
    gen.generator.arginfo), 293
model_devi_args()         (in     module     dp-          model_devi_nopbc:
    gen.generator.arginfo), 293
model_devi_clean_traj:                  model_devi_numb_candi_f:
run_jdata[model_devi_engine=lammps]/model_devi_clean_traj[model_devi_engine=lammps]/model_devi_numb_ca
    (Argument), 28
model_devi_dt:                         model_devi_numb_candi_v:
run_jdata[model_devi_engine=lammps]/model_devi_dt_jdata[model_devi_engine=lammps]/model_devi_numb_ca
    (Argument), 26
model_devi_e_trust_hi:                 model_devi_perc_candi_f:
    simplify_jdata/model_devi_e_trust_hi (Ar- run_jdata[model_devi_engine=lammps]/model_devi_perc_ca
        gument), 157
model_devi_e_trust_lo:                 model_devi_perc_candi_v:
    simplify_jdata/model_devi_e_trust_lo (Ar- run_jdata[model_devi_engine=lammps]/model_devi_perc_ca
        gument), 157
model_devi_engine:                    model_devi_plumed:
run_jdata/model_devi_engine (Argument), 23
model_devi_f_avg_relative:           run_jdata[model_devi_engine=lammps]/model_devi_plumed
    run_jdata[model_devi_engine=lammps]/model_devi_fdevi_plumedpath:
    (Argument), 28
model_devi_f_trust_hi:              run_jdata[model_devi_engine=lammps]/model_devi_plumed_
    run_jdata[model_devi_engine=amber]/model_devi_f_devi_trust_hi:
    (Argument), 31
run_jdata[model_devi_engine=lammps]/model_devi_f_ftrust_hi (Argument), 26
    (Argument), 26
model_devi_f_trust_lo:              model_devi_v_trust_hi:
run_jdata[model_devi_engine=lammps]/model_devi_f_ftrust_hi (Argument), 25
    run_jdata[model_devi_engine=lammps]/model_devi_v_trust_hi:
    (Argument), 26
simplify_jdata/model_devi_f_trust_hi (Ar- run_jdata[model_devi_engine=lammps]/model_devi_v_trust
    gument), 157
model_devi_f_trust_lo:              model_devi_v_trust_lo:
run_jdata[model_devi_engine=amber]/model_devi_f_ftrust_hi (Argument), 26
    (Argument), 26
run_jdata[model_devi_engine=lammps]/model_devi_f_ftrust_hi (Argument), 26
    (Argument), 26
run_jdata[model_devi_engine=lammps]/model_modify_jobs[method].model_devi_f_trust_hi (BACUS.ABACUS
    (Argument), 25
method), 260
simplify_jdata/model_devi_f_trust_lo (Ar- modify_stru_path()   (in     module     dp-
    gument), 157
                                                gen.auto_test.lib.abacus), 251
model_devi_jobs:                   module
run_jdata[model_devi_engine=amber]/model_devi_jobs, 251
    (Argument), 29
run_jdata[model_devi_engine=lammps]/model_devidjobs.auto_test, 251
    (Argument), 23
model_devi_jobs_args()   (in     module     dp-          dpgen.arginfo, 302
    gen.generator.arginfo), 293
model_devi_jobs_rev_mat_args() (in module dp-          dpgen.auto_test.ABACUS, 259
    gen.generator.arginfo), 293
model_devi_jobs_template_args() (in module dp-          dpgen.auto_test.calculator, 271
    gen.generator.arginfo), 293
                                                dpgen.auto_test.common_equi, 272
                                                dpgen.auto_test.common_prop, 272
                                                dpgen.auto_test.Elastic, 261
                                                dpgen.auto_testEOS, 261

```

```

dpigen.auto_test.Gamma, 263
dpigen.auto_test.gen_confs, 272
dpigen.auto_test.Interstitial, 264
dpigen.auto_test.Lammps, 264
dpigen.auto_test.lib, 251
dpigen.auto_test.lib.abacus, 251
dpigen.auto_test.lib.crys, 252
dpigen.auto_test.lib.lammps, 252
dpigen.auto_test.lib.lmp, 253
dpigen.auto_test.lib.mfp_eosfit, 253
dpigen.auto_test.lib.pwscf, 257
dpigen.auto_test.lib.siesta, 258
dpigen.auto_test.lib.util, 258
dpigen.auto_test.lib.utils, 258
dpigen.auto_test.lib.vasp, 258
dpigen.auto_test.mpdb, 272
dpigen.auto_test.Property, 266
dpigen.auto_test.refine, 272
dpigen.auto_test.reproduce, 273
dpigen.auto_test.run, 273
dpigen.auto_test.Surface, 267
dpigen.auto_test.Task, 268
dpigen.auto_test.Vacancy, 271
dpigen.auto_test.VASP, 269
dpigen.collect, 273
dpigen.collect.collect, 273
dpigen.data, 273
dpigen.data.arginfo, 276
dpigen.data.gen, 277
dpigen.data.reaction, 278
dpigen.data.surf, 278
dpigen.data.tools, 273
dpigen.data.tools.bcc, 273
dpigen.data.tools.cessp2force_lin, 274
dpigen.data.tools.create_random_disturb,
    274
dpigen.data.tools.diamond, 274
dpigen.data.tools.fcc, 275
dpigen.data.tools.hcp, 275
dpigen.data.tools.io_lammps, 275
dpigen.data.tools.sc, 276
dpigen.database, 279
dpigen.database.entry, 283
dpigen.database.run, 284
dpigen.database.vasp, 284
dpigen.dispatcher, 287
dpigen.dispatcher.Dispatcher, 287
dpigen.generator, 288
dpigen.generator.arginfo, 292
dpigen.generator.lib, 288
dpigen.generator.lib.abacus_scf, 288
dpigen.generator.lib.cp2k, 289
dpigen.generator.lib.cvasp, 289
dpigen.generator.lib.ele_temp, 289
dpigen.generator.lib.gaussian, 290
dpigen.generator.lib.lammps, 290
dpigen.generator.lib.make_calypso, 290
dpigen.generator.lib.parse_calypso, 290
dpigen.generator.lib.pwmat, 290
dpigen.generator.lib.pwscf, 291
dpigen.generator.lib.run_calypso, 291
dpigen.generator.lib.siesta, 291
dpigen.generator.lib.utils, 292
dpigen.generator.lib.vasp, 292
dpigen.generator.run, 294
dpigen.gui, 303
dpigen.main, 303
dpigen.remote, 297
dpigen.remote.decide_machine, 297
dpigen.simplify, 298
dpigen.simplify.arginfo, 298
dpigen.simplify.simplify, 299
dpigen.tools, 300
dpigen.tools.auto_gen_param, 300
dpigen.tools.collect_data, 301
dpigen.tools.relabel, 302
dpigen.tools.run_report, 302
dpigen.tools.stat_iter, 302
dpigen.tools.stat_sys, 302
dpigen.tools.stat_time, 302
dpigen.util, 303
module_list:
    init_bulk_mdata/fp/resources/module_list
        (Argument), 89
    init_reaction_mdata/build/resources/module_list
        (Argument), 135
    init_reaction_mdata/fp/resources/module_list
        (Argument), 147
    init_reaction_mdata/reaxff/resources/module_list
        (Argument), 122
    init_surf_mdata/fp/resources/module_list
        (Argument), 107
    run_mdata/fp/resources/module_list (Argument), 72
    run_mdata/model_devi/resources/module_list
        (Argument), 60
    run_mdata/train/resources/module_list
        (Argument), 48
    simplify_mdata/fp/resources/module_list
        (Argument), 201
    simplify_mdata/model_devi/resources/module_list
        (Argument), 189
    simplify_mdata/train/resources/module_list
        (Argument), 176
module_purge:
    init_bulk_mdata/fp/resources/module_purge
        (Argument), 88

```

init_reaction_mdata/build/resources/module_purge (Argument), 163
 (Argument), 134
 murnaghan() (in module *dpgen.auto_test.lib.mfp_eosfit*),
 init_reaction_mdata/fp/resources/module_purge 255
 (Argument), 147
 init_reaction_mdata/reaxff/resources/module_purge N_purge
 (Argument), 122
 init_surf_mdata/fp/resources/module_purge nbbeads:
 (Argument), 107
 run_mdata/fp/resources/module_purge (Argument), 25
 (Argument), 71
 neidelay:
 run_mdata/model_devi/resources/module_purge run_jdata[model_devi_engine=lammps]/model_devi_jobs/neidelay:
 (Argument), 59
 run_mdata/train/resources/module_purge normalize() (in module *dpgen.util*), 304
 (Argument), 47
 simplify_mdata/fp/resources/module_purge run_jdata[fp_style=gaussian]/fp_params/nproc
 (Argument), 200
 simplify_mdata/model_devi/resources/module_purge simplify_jdata[gaussian]/fp_params/nproc
 (Argument), 188
 simplify_mdata/train/resources/module_purge nstep:
 (Argument), 176
 module_unload_list: init_reaction_jdata/reaxff/nstep (Argument), 113
 init_bulk_mdata/fp/resources/module_unload_list:
 (Argument), 89
 run_jdata[model_devi_engine=amber]/nsteps
 init_reaction_mdata/build/resources/module_unload_list (Argument), 31
 (Argument), 135
 run_jdata[model_devi_engine=lammps]/model_devi_jobs/ns
 init_reaction_mdata/fp/resources/module_unload_list (Argument), 25
 (Argument), 147
 numb_atoms() (in module *dpgen.data.tools.bcc*), 273
 init_reaction_mdata/reaxff/resources/module_unload_list (Argument), 274
 (Argument), 122
 numb_loadlist(in module *dpgen.data.tools.diamond*),
 274
 init_reaction_jdata/reaxff/nstep (Argument), 20
 (Argument), 60
 simplify_jdata/numb_models (Argument), 158
 run_mdata/fp/resources/module_unload_list numb_atoms() (in module *dpgen.data.tools.fcc*), 275
 (Argument), 107
 numb_atoms() (in module *dpgen.data.tools.hcp*), 275
 run_mdata/fp/resources/module_unload_list numb_atoms() (in module *dpgen.data.tools.sc*), 276
 (Argument), 71
 numb_models:
 run_mdata/model_devi/resources/module_unload_list jdata/numb_models (Argument), 20
 (Argument), 60
 simplify_jdata/numb_models (Argument), 158
 run_mdata/train/resources/module_unload_list number_element (*dpgen.database.Entry* property), 281
 (Argument), 47
 number_element (*dpgen.database.entry.Entry* property), 284
 simplify_mdata/fp/resources/module_unload_list number_node:
 (Argument), 201
 number_node:
 simplify_mdata/model_devi/resources/module_unload_list pair_list_mdata/fp/resources/number_node
 (Argument), 189
 (Argument), 87
 simplify_mdata/train/resources/module_unload_list init_reaction_mdata/build/resources/number_node
 (Argument), 176
 (Argument), 133
 morse() (in module *dpgen.auto_test.lib.mfp_eosfit*), 255
 morse_3p() (in module *dpgen.auto_test.lib.mfp_eosfit*),
 255
 morse_6p() (in module *dpgen.auto_test.lib.mfp_eosfit*),
 255
 morse_AB() (in module *dpgen.auto_test.lib.mfp_eosfit*),
 255
 multiplicity:
 run_jdata[fp_style=gaussian]/fp_params/multiplicity (Argument), 33
 init_reaction_mdata/fp/resources/number_node
 (Argument), 69
 init_reaction_mdata/reaxff/resources/number_node
 (Argument), 120
 init_surf_mdata/fp/resources/number_node
 (Argument), 105
 run_mdata/fp/resources/number_node (Argument), 69
 (Argument), 57
 simplify_jdata[gaussian]/fp_params/multiplicity

run_mdata/train/resources/number_node
 (Argument), 45
 simplify_mdata/fp/resources/number_node
 (Argument), 199
 simplify_mdata/model_devi/resources/number_node
 (Argument), 187
 simplify_mdata/train/resources/number_node
 (Argument), 174
N
 NumberPulay:
 run_jdata[fp_style=siesta]/fp_params/NumberPulay
 (Argument), 35
 simplify_jdata[siesta]/fp_params/NumberPulay
 (Argument), 164

O

one_h5:
 run_jdata/one_h5 (Argument), 21
 simplify_jdata/one_h5 (Argument), 160
 out_dir_name() (in module dpgen.data.gen), 277
 out_dir_name() (in module dpgen.data.surf), 279
 OutcarItemError, 258
 output_fmt:
 run_jdata[fp_style=custom]/fp_params/output_fmt
 (Argument), 39
 simplify_jdata[custom]/fp_params/output_fmt
 (Argument), 168
 output_fn:
 run_jdata[fp_style=custom]/fp_params/output_fn
 (Argument), 40
 simplify_jdata[custom]/fp_params/output_fn
 (Argument), 168

P

para_deg:
 init_bulk_mdata/fp/resources/para_deg
 (Argument), 88
 init_reaction_mdata/build/resources/para_deg
 (Argument), 134
 init_reaction_mdata/fp/resources/para_deg
 (Argument), 147
 init_reaction_mdata/reaxff/resources/para_deg
 (Argument), 122
 init_surf_mdata/fp/resources/para_deg
 (Argument), 106
 run_mdata/fp/resources/para_deg (Argument), 71
 run_mdata/model_devi/resources/para_deg
 (Argument), 59
 run_mdata/train/resources/para_deg (Argument), 47
 simplify_mdata/fp/resources/para_deg (Argument), 200
 simplify_mdata/model_devi/resources/para_deg
 (Argument), 188

simplify_mdata/train/resources/para_deg
 (Argument), 176
 run_jdata[model_devi_engine=amber]/parm7:
 (Argument), 30
 parm7_prefix:
 run_jdata[model_devi_engine=amber]/parm7_prefix
 (Argument), 30
 parse_argument() (in module dp-
 gen.auto_test.lib.mfp_eosfit), 255
 parse_cur_job() (in module dp-
 gen.generator.run), 296
 parse_cur_job_repmat() (in module dp-
 gen.generator.run), 296
 parse_cur_job_sys_repmat() (in module dp-
 gen.generator.run), 296
 Parser() (in module dp-
 gen.data.tools.cessp2force_lin),
 274
 parsing_gaussian() (in module dp-
 gen.database.run), 284
 parsing_pwscf() (in module dp-
 gen.database.run), 284
 parsing_vasp() (in module dp-
 gen.database.run), 284
 passphrase:
 init_bulk_mdata/fp/machine[SSHContext]/remote_profile/
 (Argument), 85
 init_reaction_mdata/build/machine[SSHContext]/remote_p
 (Argument), 131
 init_reaction_mdata/fp/machine[SSHContext]/remote_p
 (Argument), 144
 init_reaction_mdata/reaxff/machine[SSHContext]/remote_
 (Argument), 119
 init_surf_mdata/fp/machine[SSHContext]/remote_profile/
 (Argument), 104
 run_mdata/fp/machine[SSHContext]/remote_profile/passph
 (Argument), 68
 run_mdata/model_devi/machine[SSHContext]/remote_profil
 (Argument), 56
 run_mdata/train/machine[SSHContext]/remote_profile/pas
 (Argument), 44
 simplify_mdata/fp/machine[SSHContext]/remote_profile/p
 (Argument), 197
 simplify_mdata/model_devi/machine[SSHContext]/remote_p
 (Argument), 185
 simplify_mdata/train/machine[SSHContext]/remote_profil
 (Argument), 173
 password:
 init_bulk_mdata/fp/machine[BohriumContext]/remote_profil
 (Argument), 83
 init_bulk_mdata/fp/machine[SSHContext]/remote_profile/
 (Argument), 85
 init_reaction_mdata/build/machine[BohriumContext]/remo
 (Argument), 129
 init_reaction_mdata/build/machine[SSHContext]/remote_p
 (Argument), 131
 init_reaction_mdata/fp/machine[BohriumContext]/remote_

poscar_shuffle() (*in module dpgen.data.surf*), 279
 poscar_shuffle() (*in module dpgen.generator.run*), 296
 poscar_to_conf() (*in module dpgen.generator.run*), 296
 poscar_unit() (*in module dpgen.data.tools.bcc*), 273
 poscar_unit() (*in module dpgen.data.tools.diamond*), 274
 poscar_unit() (*in module dpgen.data.tools.fcc*), 275
 poscar_unit() (*in module dpgen.data.tools.hcp*), 275
 poscar_unit() (*in module dpgen.data.tools.sc*), 276
 poscar_vol() (*in module dpgen.auto_test.lib.vasp*), 259
 post_equi() (*in module dpgen.auto_test.common_equi*), 272
 post_fp() (*in module dpgen.generator.run*), 296
 post_fp_abacus_scf() (*in module dpgen.generator.run*), 296
 post_fp_amber_diff() (*in module dpgen.generator.run*), 296
 post_fp_check_fail() (*in module dpgen.generator.run*), 296
 post_fp_cp2k() (*in module dpgen.generator.run*), 296
 post_fp_custom() (*in module dpgen.generator.run*), 296
 post_fp_gaussian() (*in module dpgen.generator.run*), 297
 post_fp_pwmat() (*in module dpgen.generator.run*), 297
 post_fp_pwscf() (*in module dpgen.generator.run*), 297
 post_fp_siesta() (*in module dpgen.generator.run*), 297
 post_fp_vasp() (*in module dpgen.generator.run*), 297
 post_model_devi() (*in module dpgen.generator.run*), 297
 post_model_devi() (*in module dpgen.simplify.simplify*), 299
 post_process() (*dpgen.auto_test.Elastic.Elastic method*), 262
 post_process() (*dpgen.auto_test.EOS.EOS method*), 261
 post_process() (*dpgen.auto_test.Gamma.Gamma method*), 263
 post_process() (*dpgen.auto_test.Interstitial.Interstitial method*), 264
 post_process() (*dpgen.auto_test.Property.Property method*), 267
 post_process() (*dpgen.auto_test.Surface.Surface method*), 267
 post_process() (*dpgen.auto_test.Vacancy.Vacancy method*), 271
 post_property() (*in module dpgen.auto_test.common_prop*), 272
 post_repro() (*in module dpgen.auto_test.reproduce*), 273
 post_train() (*in module dpgen.generator.run*), 297

potcars:
 init_bulk_jdata/potcars (*Argument*), 78
 init_surf_jdata/potcars (*Argument*), 96
 predict() (*dpgen.generator.lib.ele_temp.NBandsEsti method*), 290

prepend_script:
 init_bulk_mdata/fp/resources/prepend_script (*Argument*), 89
 init_reaction_mdata/build/resources/prepend_script (*Argument*), 135
 init_reaction_mdata/fp/resources/prepend_script (*Argument*), 148
 init_reaction_mdata/reaxff/resources/prepend_script (*Argument*), 123
 init_surf_mdata/fp/resources/prepend_script (*Argument*), 107
 run_mdata/fp/resources/prepend_script (*Argument*), 72
 run_mdata/model_devi/resources/prepend_script (*Argument*), 60
 run_mdata/train/resources/prepend_script (*Argument*), 48
 simplify_mdata/fp/resources/prepend_script (*Argument*), 201
 simplify_mdata/model_devi/resources/prepend_script (*Argument*), 189
 simplify_mdata/train/resources/prepend_script (*Argument*), 177

press:
 run_jdata[model_devi_engine=lammps]/model_devi_jobs/pr (*Argument*), 24

process_outcar_file_v5_dev() (*in module dpgen.data.tools.cessp2force_ljn*), 274

program_id:
 init_bulk_mdata/fp/machine[BohriumContext]/remote_profile (*Argument*), 83
 init_reaction_mdata/build/machine[BohriumContext]/remote_profile (*Argument*), 129
 init_reaction_mdata/fp/machine[BohriumContext]/remote_profile (*Argument*), 141
 init_reaction_mdata/reaxff/machine[BohriumContext]/remote_profile (*Argument*), 117
 init_surf_mdata/fp/machine[BohriumContext]/remote_profile (*Argument*), 102
 run_mdata/fp/machine[BohriumContext]/remote_profile/pr (*Argument*), 66
 run_mdata/model_devi/machine[BohriumContext]/remote_profile (*Argument*), 54
 run_mdata/train/machine[BohriumContext]/remote_profile/tr (*Argument*), 42
 simplify_mdata/fp/machine[BohriumContext]/remote_profile (*Argument*), 195
 simplify_mdata/model_devi/machine[BohriumContext]/remote_profile (*Argument*), 183

simplify_mdata/train/machine[BohriumContext]/remote_profile/mfp/resources(strategy/ratio_unfinished)
 (Argument), 171

Property (class in `dpgen.auto_test.Property`), 266

Q

qm_charge:
`run_jdata[model_devi_engine=amber]/qm_charge` (Argument), 31

qm_region:
`run_jdata[model_devi_engine=amber]/qm_region` (Argument), 30

qmkeywords:
`init_reaction_jdata/qmkeywords` (Argument), 114

queue_name:
`init_bulk_mdata/fp/resources/queue_name` (Argument), 87
`init_reaction_mdata/build/resources/queue_name` (Argument), 133
`init_reaction_mdata/fp/resources/queue_name` (Argument), 145
`init_reaction_mdata/reaxff/resources/queue_name` (Argument), 120
`init_surf_mdata/fp/resources/queue_name` (Argument), 105
`run_mdata/fp/resources/queue_name` (Argument), 70
`run_mdata/model_devi/resources/queue_name` (Argument), 58
`run_mdata/train/resources/queue_name` (Argument), 46
`simplify_mdata/fp/resources/queue_name` (Argument), 199
`simplify_mdata/model_devi/resources/queue_name` (Argument), 187
`simplify_mdata/train/resources/queue_name` (Argument), 175

R

r:
`run_jdata[model_devi_engine=amber]/r` (Argument), 31

random_range() (in module `dpgen.data.tools.create_random_disturb`), 274

RandomDisturbParser() (in module `dpgen.data.tools.create_random_disturb`), 274

ratio_failed:
`run_jdata/ratio_failed` (Argument), 22
`simplify_jdata/ratio_failed` (Argument), 161

ratio_unfinished:
`init_bulk_mdata/fp/resources/strategy/ratio_unfinished` (Argument), 88
`init_reaction_mdata/build/resources/strategy/ratio_unfinished` (Argument), 134

remote_profile/mfp/resources(strategy/ratio_unfinished)
 (Argument), 146

init_reaction_mdata/reaxff/resources(strategy/ratio_unfinished)
 (Argument), 121

init_surf_mdata/fp/resources(strategy/ratio_unfinished)
 (Argument), 106

run_mdata/fp/resources(strategy/ratio_unfinished)
 (Argument), 71

run_mdata/model_devi/resources(strategy/ratio_unfinished)
 (Argument), 59

run_mdata/train/resources(strategy/ratio_unfinished)
 (Argument), 47

simplify_mdata/fp/resources(strategy/ratio_unfinished)
 (Argument), 200

simplify_mdata/model_devi/resources(strategy/ratio_unfinished)
 (Argument), 188

simplify_mdata/train/resources(strategy/ratio_unfinished)
 (Argument), 175

rBM4() (in module `dpgen.auto_test.lib.mfp_eosfit`), 255

rBM4_pv() (in module `dpgen.auto_test.lib.mfp_eosfit`), 255

rBM5() (in module `dpgen.auto_test.lib.mfp_eosfit`), 255

rBM5_pv() (in module `dpgen.auto_test.lib.mfp_eosfit`), 256

read_ve() (in module `dpgen.auto_test.lib.mfp_eosfit`), 256

read_velp() (in module `dpgen.auto_test.lib.mfp_eosfit`), 256

read_vlp() (in module `dpgen.auto_test.lib.mfp_eosfit`), 256

reaxff:
`init_reaction_jdata/reaxff` (Argument), 112
`init_reaction_mdata/reaxff` (Argument), 114

reciprocal_box() (in module `dpgen.auto_test.lib.vasp`), 259

record_iter() (in module `dpgen.auto_test.lib.utils`), 258

record_iter() (in module `dpgen.generator.lib.utils`), 292

register_iteration() (dp-class gen.tools.auto_gen_param.Iteration method), 300

register_sub_iteration() (dp-class gen.tools.auto_gen_param.Iteration method), 300

register_sub_system() (dp-class gen.tools.auto_gen_param.System method), 301

register_system() (dp-class gen.tools.auto_gen_param.System method), 301

regulate_poscar() (in module `dpgen.auto_test.lib.vasp`), 259

relax_incar:

```

init_bulk_jdata/relax_incar (Argument), 79
init_surf_jdata/relax_incar (Argument), 98
relax_kpt:
    init_bulk_jdata[ABACUS]/relax_kpt (Argument), 80
remote_profile:
    init_bulk_mdata/fp/machine[BohriumContext]/remote_profile
        (Argument), 101
    init_surf_mdata/fp/machine[HDFSContext]/remote_profile
        (Argument), 102
    init_surf_mdata/fp/machine[LazyLocalContext]/remote_profile
        (Argument), 101
    init_surf_mdata/fp/machine[LocalContext]/remote_profile
        (Argument), 101
    init_surf_mdata/fp/machine[OpenAPIContext]/remote_profile
        (Argument), 104
    init_surf_mdata/fp/machine[SSHContext]/remote_profile
        (Argument), 103
    init_surf_mdata/fp/machine[BohriumContext]/remote_profile
        (Argument), 66
    init_surf_mdata/fp/machine[HDFSContext]/remote_profile
        (Argument), 67
    init_surf_mdata/fp/machine[LazyLocalContext]/remote_profile
        (Argument), 66
    init_surf_mdata/fp/machine[LocalContext]/remote_profile
        (Argument), 65
    init_surf_mdata/fp/machine[OpenAPIContext]/remote_profile
        (Argument), 69
    init_surf_mdata/fp/machine[SSHContext]/remote_profile
        (Argument), 67
init_reaction_mdata/build/machine[BohriumContext]/remote_profile
    (Argument), 129
init_reaction_mdata/build/machine[HDFSContext]/remote_profile
    (Argument), 130
init_reaction_mdata/build/machine[LazyLocalContext]/remote_profile
    (Argument), 128
init_reaction_mdata/build/machine[LocalContext]/remote_profile
    (Argument), 128
init_reaction_mdata/build/machine[OpenAPIContext]/remote_profile
    (Argument), 132
init_reaction_mdata/build/machine[SSHContext]/remote_profile
    (Argument), 130
init_reaction_mdata/fp/machine[BohriumContext]/remote_profile
    (Argument), 141
init_reaction_mdata/fp/machine[HDFSContext]/remote_profile
    (Argument), 142
init_reaction_mdata/fp/machine[LazyLocalContext]/remote_profile
    (Argument), 141
init_reaction_mdata/fp/machine[LocalContext]/remote_profile
    (Argument), 140
init_reaction_mdata/fp/machine[OpenAPIContext]/remote_profile
    (Argument), 145
init_reaction_mdata/fp/machine[SSHContext]/remote_profile
    (Argument), 143
init_reaction_mdata/reaxff/machine[BohriumContext]/remote_profile
    (Argument), 116
init_reaction_mdata/reaxff/machine[HDFSContext]/remote_profile
    (Argument), 118
init_reaction_mdata/reaxff/machine[LazyLocalContext]/remote_profile
    (Argument), 116
init_reaction_mdata/reaxff/machine[LocalContext]/remote_profile
    (Argument), 116
init_reaction_mdata/reaxff/machine[OpenAPIContext]/remote_profile
    (Argument), 120
init_reaction_mdata/reaxff/machine[SSHContext]/remote_profile
    (Argument), 118
init_surf_mdata/fp/machine[BohriumContext]/remote_profile
    (Argument), 195
init_surf_mdata/fp/machine[HDFSContext]/remote_profile
    (Argument), 196
init_surf_mdata/fp/machine[LazyLocalContext]/remote_profile
    (Argument), 195

```

```

simplify_mdata/fp/machine[LocalContext]/remote_profile(auto_test.lib.utils), 258
  (Argument), 194
    repeat_to_length() (in module dp-gen.auto_test.lib.utils)
simplify_mdata/fp/machine[OpenAPIContext]/remote_profile(generator.lib.utils), 292
  (Argument), 198
    replace() (in module dpgen.auto_test.lib.utils), 258
simplify_mdata/fp/machine[SSHContext]/remote_profile(surf.generator.lib.utils), 278
  (Argument), 197
    replace() (in module dpgen.data.surf), 279
simplify_mdata/model_devi/machine[BohriumContext]/remote_profile(mfp_eosfit.generator.lib.utils), 292
  (Argument), 183
    reprove() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/model_devi/machine[HDFSContext]/remote_profile(mfp_eosfit), 256
  (Argument), 184
    reprovp() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/model_devi/machine[LazyLocalContext]/remote_profile(mfp_eosfit), 256
  (Argument), 182
    res_birch() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/model_devi/machine[LocalContext]/remote_profile(mfp_eosfit), 256
  (Argument), 182
    res_BM4() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/model_devi/machine[OpenAPIContext]/remote_profile(mfp_eosfit), 256
  (Argument), 186
    res_BM5() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/model_devi/machine[SSHContext]/remote_profile(mfp_eosfit), 256
  (Argument), 184
    res_Li4p() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/train/machine[BohriumContext]/remote_profile(mfp_eosfit), 256
  (Argument), 170
    res_LOG4() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/train/machine[HDFSContext]/remote_profile(mfp_eosfit), 256
  (Argument), 172
    res_LOG5() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/train/machine[LazyLocalContext]/remote_profile(mfp_eosfit), 256
  (Argument), 170
    res_mBm4() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/train/machine[LocalContext]/remote_profile(mfp_eosfit), 256
  (Argument), 170
    res_mBm4poly() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/train/machine[OpenAPIContext]/remote_profile(mfp_eosfit), 256
  (Argument), 174
    res_mBm5() (in module dpgen.auto_test.lib.mfp_eosfit),
simplify_mdata/train/machine[SSHContext]/remote_profile(mfp_eosfit), 256
  (Argument), 172
    res_mBm5poly() (in module dpgen.auto_test.lib.mfp_eosfit),
remote_root:
  init_bulk_mdata/fp/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 82
    res_mie() (in module dpgen.auto_test.lib.mfp_eosfit), 257
  init_reaction_mdata/build/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 127
    res_mie_simple() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
  init_reaction_mdata/fp/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 140
    res_morse_3p() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
  init_reaction_mdata/reaxff/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 115
    res_morse_6p() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
  init_surf_mdata/fp/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 100
    res_morse_AB() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
  run_mdata/fp/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 65
    res_morse_AB() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
  run_mdata/model_devi/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 52
    res_murnaghan() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
  run_mdata/train/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 41
    res_rBM4() (in module dpgen.auto_test.lib.mfp_eosfit), 257
  simplify_mdata/fp/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 194
    res_rBM4_pv() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
  simplify_mdata/model_devi/machine/remote_root (remote_root) (in module dpgen.auto_test.lib.mfp_eosfit), 257
    (Argument), 181
    res_rBM5() (in module dpgen.auto_test.lib.mfp_eosfit), 257
  simplify_mdata/train/machine/remote_root (remote_root) (in module dp-gen.auto_test.lib.mfp_eosfit), 257
    (Argument), 169
    res_rBM5_pv() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
repeat_to_length() (in module dp-gen.auto_test.lib.mfp_eosfit), 257
  res_rPT4() (in module dpgen.auto_test.lib.mfp_eosfit), 257

```

257
res_rPT4_pv() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 257
res_rPT5() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 257
res_rPT5_pv() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 257
res_SJX_5p() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 256
res_SJX_v2() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 256
res_TEOS() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 256
res_universal() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 257
res_vinet() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 257
res_vinet_pv() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 257
resources:
 init_bulk_mdata/fp/resources (*Argument*), 87
 init_reaction_mdata/build/resources (*Argument*), 132
 init_reaction_mdata/fp/resources (*Argument*), 145
 init_reaction_mdata/reaxff/resources (*Argument*), 120
 init_surf_mdata/fp/resources (*Argument*), 105
 run_mdata/fp/resources (*Argument*), 69
 run_mdata/model_devi/resources (*Argument*), 57
 run_mdata/train/resources (*Argument*), 45
 simplify_mdata/fp/resources (*Argument*), 199
 simplify_mdata/model_devi/resources (*Argument*), 186
 simplify_mdata/train/resources (*Argument*), 174
restart_from_iter:
 run_jdata[model_devi_engine=amber]/model_devi_fpbs/restart_from_iter (*Argument*), 29
retry_count:
 init_bulk_mdata/fp/machine[BohriumContext]/remote_profile/retry_count (*Argument*), 84
 init_reaction_mdata/build/machine[BohriumContext]/remote_profile/retry_count (*Argument*), 129
 init_reaction_mdata/fp/machine[BohriumContext]/remote_profile/retry_count (*Argument*), 142
 init_reaction_mdata/reaxff/machine[BohriumContext]/remote_profile/retry_count (*Argument*), 117
 init_surf_mdata/fp/machine[BohriumContext]/remote_profile/retry_count (*Argument*), 102
 run_mdata/fp/machine[BohriumContext]/remote_profile/retry_count (*Argument*), 66
run_mdata/model_devi/machine[BohriumContext]/remote_pr
 (*Argument*), 54
run_mdata/train/machine[BohriumContext]/remote_profil
 (*Argument*), 42
simplify_mdata/fp/machine[BohriumContext]/remote_profi
 (*Argument*), 196
simplify_mdata/model_devi/machine[BohriumContext]/remo
 (*Argument*), 183
simplify_mdata/train/machine[BohriumContext]/remote_pr
 (*Argument*), 171
return_direction() (*dp-gen.auto_test.Gamma.Gamma method*), 263
rev_mat:
 run_jdata[model_devi_engine=lammps]/model_devi_jobs/re
 (*Argument*), 23
revise_by_keys() (in module *dp-gen.generator.run*), 297
revise_lmp_input_dump() (in module *dp-gen.generator.run*), 297
revise_lmp_input_model() (in module *dp-gen.generator.run*), 297
revise_lmp_input_plm() (in module *dp-gen.generator.run*), 297
rPT4() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 256
rPT4_pv() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 256
rPT5() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 256
rPT5_pv() (in module *dp-gen.auto_test.lib.mfp_eosfit*), 256
run_abacus_md() (in module *dp-gen.data.gen*), 278
run_abacus_relax() (in module *dp-gen.data.gen*), 278
run_build_dataset() (in module *dp-gen.data.reaction*), 278
run_calypso_model_devi() (in module *dp-gen.generator.lib.run_calypso*), 291
run_equi() (in module *dp-gen.auto_test.common_equi*), 272
run_fp() (in module *dp-gen.data.reaction*), 278
run_fp_inner() (in module *dp-gen.generator.run*), 297
run_iter() (in module *dp-gen.generator.run*), 297
run_jdata (*Argument*)
run_jdata/jdata[remote_profile/retry_count] (*Argument*), 18
run_jdata/default_training_param (*Argument*)
run_jdata/default_profile/retry_count (*Argument*), 19
run_jdata/detailed_report_make_fp (*Argument*)
run_jdata/detailed_report_file/retry2count (*Argument*)
run_jdata/dp_compress (*Argument*)
run_jdata/remote_comprofile/retry_count (*Argument*)
run_jdata/remote_train_profile/retry_count (*Argument*)
run_jdata/dp_train_skip_neighbor_stat (*Argument*)
dp_train_skip_neighbor_stat (:, 20)

```

run_jdata/fp_accurate_soft_threshold (Argument)
    fp_accurate_soft_threshold:, 22
run_jdata/fp_accurate_threshold (Argument)
    fp_accurate_threshold:, 22
run_jdata/fp_cluster_vacuum (Argument)
    fp_cluster_vacuum:, 22
run_jdata/fp_style (Argument)
    fp_style:, 32
run_jdata/fp_task_max (Argument)
    fp_task_max:, 22
run_jdata/fp_task_min (Argument)
    fp_task_min:, 22
run_jdata/init_batch_size (Argument)
    init_batch_size:, 19
run_jdata/init_data_prefix (Argument)
    init_data_prefix:, 19
run_jdata/init_data_sys (Argument)
    init_data_sys:, 19
run_jdata/mass_map (Argument)
    mass_map:, 18
run_jdata/model_devi_activation_func (Argument)
    model_devi_activation_func:, 21
run_jdata/model_devi_engine (Argument)
    model_devi_engine:, 23
run_jdata/numb_models (Argument)
    numb_models:, 20
run_jdata/one_h5 (Argument)
    one_h5:, 21
run_jdata/ratio_failed (Argument)
    ratio_failed:, 22
run_jdata/srtab_file_path (Argument)
    srtab_file_path:, 21
run_jdata/sys_batch_size (Argument)
    sys_batch_size:, 19
run_jdata/sys_configs (Argument)
    sys_configs:, 19
run_jdata/sys_configs_prefix (Argument)
    sys_configs_prefix:, 19
run_jdata/sys_format (Argument)
    sys_format:, 19
run_jdata/training_finetune_model (Argument)
    training_finetune_model:, 22
run_jdata/training_init_frozen_model (Argument)
    training_init_frozen_model:, 21
run_jdata/training_init_model (Argument)
    training_init_model:, 20
run_jdata/training_iter0_model_path (Argument)
    training_iter0_model_path:, 20
run_jdata/training_reuse_iter (Argument)
    training_reuse_iter:, 20
run_jdata/training_reuse_numb_steps (Argument)
    training_reuse_numb_steps:, 21
run_jdata/training_reuse_old_ratio (Argument)
    training_reuse_old_ratio:, 20
run_jdata/training_reuse_start_lr (Argument)
    training_reuse_start_lr:, 21
run_jdata/training_reuse_start_pref_e (Argument)
    training_reuse_start_pref_e:, 21
run_jdata/training_reuse_start_pref_f (Argument)
    training_reuse_start_pref_f:, 21
run_jdata/type_map (Argument)
    type_map:, 18
run_jdata/use_ele_temp (Argument)
    use_ele_temp:, 19
run_jdata:
    run_jdata (Argument), 18
run_jdata_arginfo() (in module dp-
    gen.generator.arginfo), 293
run_jdata[fp_style=abacus]/fp_dpks_descriptor
    (Argument)
    fp_dpks_descriptor:, 37
run_jdata[fp_style=abacus]/fp_incar (Argument)
    fp_incar:, 36
run_jdata[fp_style=abacus]/fp_kpt_file (Argument)
    fp_kpt_file:, 37
run_jdata[fp_style=abacus]/fp_orb_files
    (Argument)
    fp_orb_files:, 36
run_jdata[fp_style=abacus]/fp_pp_files (Argument)
    fp_pp_files:, 36
run_jdata[fp_style=abacus]/fp_pp_path (Argument)
    fp_pp_path:, 36
run_jdata[fp_style=abacus]/k_points (Argument)
    k_points:, 37
run_jdata[fp_style=abacus]/user_fp_params
    (Argument)
    user_fp_params:, 37
run_jdata[fp_style=amber/diff]/fp_params (Argument)
    fp_params:, 37
run_jdata[fp_style=amber/diff]/fp_params/high_level_mdin
    (Argument)
    high_level_mdin:, 37
run_jdata[fp_style=amber/diff]/fp_params/low_level_mdin
    (Argument)
    low_level_mdin:, 38

```

```

run_jdata[fp_style=amber/diff]/high_level      run_jdata[fp_style=gaussian]/fp_params/nproc
    (Argument)                                (Argument)
    high_level:, 37                         nproc:, 34
run_jdata[fp_style=cp2k]/external_input_path   run_jdata[fp_style=gaussian]/use_clusters
    (Argument)                                (Argument)
    external_input_path:, 36                  use_clusters:, 32
run_jdata[fp_style=cp2k]/user_fp_params        run_jdata[fp_style=pwscf]/fp_params  (Argu-
    (Argument)                                ment)
    user_fp_params:, 36                      fp_params:, 38
run_jdata[fp_style=custom]/fp_params  (Argu- run_jdata[fp_style=pwscf]/fp_params/ecut (Ar-
    ment)                                     gument)
    fp_params:, 39                           ecut:, 38
run_jdata[fp_style=custom]/fp_params/input_fmt run_jdata[fp_style=pwscf]/fp_params/ediff
    (Argument)                                (Argument)
    input_fmt:, 39                          ediff:, 38
run_jdata[fp_style=custom]/fp_params/input_fn  run_jdata[fp_style=pwscf]/fp_params/kspacing
    (Argument)                                (Argument)
    input_fn:, 39                           kspacing:, 39
run_jdata[fp_style=custom]/fp_params/output_fn run_jdata[fp_style=pwscf]/fp_params/sigma
    (Argument)                                (Argument)
    output_fmt:, 39                         sigma:, 39
run_jdata[fp_style=custom]/fp_params/output_fn run_jdata[fp_style=pwscf]/fp_params/smearing
    (Argument)                                (Argument)
    output_fn:, 40                           smearing:, 38
run_jdata[fp_style=gaussian]/cluster_cutoff     run_jdata[fp_style=pwscf]/fp_pp_files (Argu-
    (Argument)                                ment)
    cluster_cutoff:, 33                      fp_pp_files:, 38
run_jdata[fp_style=gaussian]/cluster_cutoff_hard run_jdata[fp_style=pwscf]/fp_pp_path  (Argu-
    (Argument)                                ment)
    cluster_cutoff_hard:, 33                 fp_pp_path:, 38
run_jdata[fp_style=gaussian]/cluster_minify    run_jdata[fp_style=pwscf]/user_fp_params (Ar-
    (Argument)                                gument)
    cluster_minify:, 33                      user_fp_params:, 39
run_jdata[fp_style=gaussian]/fp_params (Argu- run_jdata[fp_style=siesta]/cluster_cutoff
    ment)                                     (Argument)
    fp_params:, 33                           cluster_cutoff:, 34
run_jdata[fp_style=gaussian]/fp_params/basis_set run_jdata[fp_style=siesta]/fp_params  (Argu-
    (Argument)                                ment)
    basis_set:, 34                          fp_params:, 34
run_jdata[fp_style=gaussian]/fp_params/charge  run_jdata[fp_style=siesta]/fp_params/ecut
    (Argument)                                (Argument)
    charge:, 34                            ecut:, 35
run_jdata[fp_style=gaussian]/fp_params/fragment_guesses run_jdata[fp_style=siesta]/fp_params/ediff
    (Argument)                                (Argument)
    fragment_guesses:, 34                   ediff:, 35
run_jdata[fp_style=gaussian]/fp_params/keywords run_jdata[fp_style=siesta]/fp_params/kspacing
    (Argument)                                (Argument)
    keywords:, 33                           kspacing:, 35
run_jdata[fp_style=gaussian]/fp_params/keywords_high_multiplicity run_jdata[fp_style=siesta]/fp_params/mixingWeight
    (Argument)                                (Argument)
    keywords_high_multiplicity:, 34          mixingWeight:, 35
run_jdata[fp_style=gaussian]/fp_params/multiplicity run_jdata[fp_style=siesta]/fp_params/NumberPulay
    (Argument)                                (Argument)
    multiplicity:, 33                        NumberPulay:, 35

```

```

run_jdata[fp_style=siesta]/fp_pp_files (Argument)
    fp_pp_files:, 35
run_jdata[fp_style=siesta]/fp_pp_path (Argument)
    fp_pp_path:, 35
run_jdata[fp_style=siesta]/use_clusters (Argument)
    use_clusters:, 34
run_jdata[fp_style=vasp]/cvasp (Argument)
    cvasp:, 32
run_jdata[fp_style=vasp]/fp_aniso_kspacing (Argument)
    fp_aniso_kspacing:, 32
run_jdata[fp_style=vasp]/fp_incar (Argument)
    fp_incar:, 32
run_jdata[fp_style=vasp]/fp_pp_files (Argument)
    fp_pp_files:, 32
run_jdata[fp_style=vasp]/fp_pp_path (Argument)
    fp_pp_path:, 32
run_jdata[fp_style=vasp]/fp_skip_bad_box (Argument)
    fp_skip_bad_box:, 32
run_jdata[model_devi_engine=amber]/cutoff (Argument)
    cutoff:, 30
run_jdata[model_devi_engine=amber]/disang (Argument)
    disang:, 31
run_jdata[model_devi_engine=amber]/disang_prefix (Argument)
    disang_prefix:, 31
run_jdata[model_devi_engine=amber]/low_level (Argument)
    low_level:, 30
run_jdata[model_devi_engine=amber]/mdin (Argument)
    mdin:, 30
run_jdata[model_devi_engine=amber]/mdin_prefix (Argument)
    mdin_prefix:, 30
run_jdata[model_devi_engine=amber]/model_devi_f_trust_hi (Argument)
    model_devi_f_trust_hi:, 31
run_jdata[model_devi_engine=amber]/model_devi_f_trust_lo (Argument)
    model_devi_f_trust_lo:, 31
run_jdata[model_devi_engine=amber]/model_devi_jobs (Argument)
    model_devi_jobs:, 29
run_jdata[model_devi_engine=amber]/model_devi_jobs_desc (Argument)
    model_devi_jobs_desc:, 29
    restart_from_iter:, 29
run_jdata[model_devi_engine=amber]/model_devi_jobs/sys_idx (Argument)
    sys_idx:, 29
run_jdata[model_devi_engine=amber]/model_devi_jobs/trj_freq (Argument)
    trj_freq:, 29
run_jdata[model_devi_engine=amber]/nsteps (Argument)
    nsteps:, 31
run_jdata[model_devi_engine=amber]/parm7 (Argument)
    parm7:, 30
run_jdata[model_devi_engine=amber]/parm7_prefix (Argument)
    parm7_prefix:, 30
run_jdata[model_devi_engine=amber]/qm_charge (Argument)
    qm_charge:, 31
run_jdata[model_devi_engine=amber]/qm_region (Argument)
    qm_region:, 30
run_jdata[model_devi_engine=amber]/r (Argument)
    r:, 31
run_jdata[model_devi_engine=lammps]/epsilon (Argument)
    epsilon:, 29
run_jdata[model_devi_engine=lammps]/epsilon_v (Argument)
    epsilon_v:, 29
run_jdata[model_devi_engine=lammps]/model_devi_adapt_trust (Argument)
    model_devi_adapt_trust_lo:, 27
run_jdata[model_devi_engine=lammps]/model_devi_clean_traj (Argument)
    model_devi_clean_traj:, 28
run_jdata[model_devi_engine=lammps]/model_devi_dt (Argument)
    model_devi_dt:, 26
run_jdata[model_devi_engine=lammps]/model_devi_f_avg_rel (Argument)
    model_devi_f_avg_relative:, 28
run_jdata[model_devi_engine=lammps]/model_devi_f_trust_hi (Argument)
    model_devi_f_trust_hi:, 26
run_jdata[model_devi_engine=lammps]/model_devi_f_trust_lo (Argument)
    model_devi_f_trust_lo:, 26
run_jdata[model_devi_engine=lammps]/model_devi_jobs (Argument)
    model_devi_jobs:, 23
run_jdata[model_devi_engine=lammps]/model_devi_jobs_desc (Argument)
    model_devi_jobs_desc:, 23
run_jdata[model_devi_engine=lammps]/model_devi_jobs_ensem (Argument)
    model_devi_jobs_ensem:, 23

```

```

ensemble:, 25
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_jobs/temp
    (Argument)
model_devi_f_trust_hi:, 25
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_jobs/trj_f
    (Argument)
model_devi_f_trust_lo:, 25
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_merge_traj
    (Argument)
model_devi_v_trust_hi:, 26
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_nopbc
    (Argument)
model_devi_v_trust_lo:, 26
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_numb_candi_
    (Argument)
nbeads:, 25
model_devi_numb_candi_f:, 27
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_numb_candi_
    (Argument)
neidelay:, 25
model_devi_numb_candi_v:, 27
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_perc_candi_
    (Argument)
nsteps:, 25
model_devi_perc_candi_f:, 27
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_perc_candi_
    (Argument)
press:, 24
model_devi_perc_candi_v:, 28
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_plumed
    (Argument)
rev_mat:, 23
model_devi_plumed:, 28
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_plumed_path
    (Argument)
lmp:, 23
model_devi_plumed_path:, 28
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_skip
    (Argument)
plm:, 24
model_devi_skip:, 26
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_v_trust_hi
    (Argument)
sys_idx:, 24
model_devi_v_trust_hi:, 27
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/model_devi_v_trust_lo
    (Argument)
sys_rev_mat:, 24
model_devi_v_trust_lo:, 26
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/shuffle_poscar
    (Argument)
taup:, 25
shuffle_poscar:, 28
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/use_relative
    (Argument)
taut:, 25
use_relative:, 29
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/use_relative_v
    (Argument)
template:, 23
use_relative_v:, 29
run_jdata[model_devi_engine=lammps]/model_devi_jobs[module=model_devi_engine=lammps]/(in module dp-
    (Argument)
lmp:, 23
run_mdata (Argument)
run_jdata[model_devi_engine=lammps]/model_devi_jobs/template/api
    (Argument)
run_mdata/api_version (Argument)

```

```

api_version:, 40
run_mdata/deepmd_version (Argument)
    deepmd_version:, 40
run_mdata/fp (Argument)
    fp:, 64
run_mdata/fp/command (Argument)
    command:, 64
run_mdata/fp/machine (Argument)
    machine:, 64
run_mdata/fp/machine/batch_type (Argument)
    batch_type:, 64
run_mdata/fp/machine/clean_asynchronously
    (Argument)
    clean_asynchronously:, 65
run_mdata/fp/machine/context_type (Argument)
    context_type:, 65
run_mdata/fp/machine/local_root (Argument)
    local_root:, 64
run_mdata/fp/machine/remote_root (Argument)
    remote_root:, 65
run_mdata/fp/machine[BohriumContext]/remote_profile
    (Argument)
    remote_profile:, 66
run_mdata/fp/machine[BohriumContext]/remote_profile[BohriumContext]
    (Argument)
    email:, 66
run_mdata/fp/machine[BohriumContext]/remote_profile[BohriumContext]
    (Argument)
    ignore_exit_code:, 67
run_mdata/fp/machine[BohriumContext]/remote_profile[BohriumContext]
    (Argument)
    input_data:, 67
run_mdata/fp/machine[BohriumContext]/remote_profile[BohriumContext]
    (Argument)
    keep_backup:, 67
run_mdata/fp/machine[BohriumContext]/remote_profile[BohriumContext]
    (Argument)
    password:, 66
run_mdata/fp/machine[BohriumContext]/remote_profile[BohriumContext]
    (Argument)
    program_id:, 66
run_mdata/fp/machine[BohriumContext]/remote_profile[BohriumContext]
    (Argument)
    retry_count:, 66
run_mdata/fp/machine[HDFSContext]/remote_profile
    (Argument)
    remote_profile:, 67
run_mdata/fp/machine[LazyLocalContext]/remote_profile
    (Argument)
    remote_profile:, 66
run_mdata/fp/machine[LocalContext]/remote_profile
    (Argument)
    remote_profile:, 65
run_mdata/fp/machine[OpenAPIContext]/remote_profile
    (Argument)
    remote_profile:, 69
run_mdata/fp/machine[SSHContext]/remote_profile
    (Argument)
    remote_profile:, 67
run_mdata/fp/machine[SSHContext]/remote_profile/hostname
    (Argument)
    hostname:, 67
run_mdata/fp/machine[SSHContext]/remote_profile/key_filename
    (Argument)
    key_filename:, 68
run_mdata/fp/machine[SSHContext]/remote_profile/look_for_keys
    (Argument)
    look_for_keys:, 69
run_mdata/fp/machine[SSHContext]/remote_profile/passphrase
    (Argument)
    passphrase:, 68
run_mdata/fp/machine[SSHContext]/remote_profile/password
    (Argument)
    password:, 68
run_mdata/fp/machine[SSHContext]/remote_profile/port
    (Argument)
    port:, 68
run_mdata/fp/machine[SSHContext]/remote_profile/tar_compression
    (Argument)
    tar_compression:, 69
run_mdata/fp/machine[SSHContext]/remote_profile/timeout
    (Argument)
    timeout:, 69
run_mdata/fp/machine[SSHContext]/remote_profile/totp_secret
    (Argument)
    totp_secret:, 69
run_mdata/fp/machine[SSHContext]/remote_profile/username
    (Argument)
    username:, 69
run_mdata/fp/resources (Argument)
    resources:, 69
run_mdata/fp/resources/append_script (Argument)
    append_script:, 72
run_mdata/fp/resources/batch_type (Argument)
    batch_type:, 72
run_mdata/fp/resources/cpu_per_node (Argument)
    cpu_per_node:, 70
run_mdata/fp/resources/custom_flags (Argument)
    custom_flags:, 70
run_mdata/fp/resources/envs (Argument)
    envs:, 72
run_mdata/fp/resources/gpu_per_node (Argument)
    gpu_per_node:, 70

```

```

run_mdata/fp/resources/group_size (Argument)
    group_size:, 70
run_mdata/fp/resources/module_list (Argument)
    module_list:, 72
run_mdata/fp/resources/module_purge (Argument)
    module_purge:, 71
run_mdata/fp/resources/module_unload_list (Argument)
    module_unload_list:, 71
run_mdata/fp/resources/number_node (Argument)
    number_node:, 69
run_mdata/fp/resources/para_deg (Argument)
    para_deg:, 71
run_mdata/fp/resources/prepend_script (Argument)
    prepend_script:, 72
run_mdata/fp/resources/queue_name (Argument)
    queue_name:, 70
run_mdata/fp/resources/source_list (Argument)
    source_list:, 71
run_mdata/fp/resources/strategy (Argument)
    strategy:, 70
run_mdata/fp/resources/strategy/customized_script_header_template_file (Argument)
    customized_script_header_template_file:, 71
run_mdata/fp/resources/strategy/if_cuda_multi_devices (Argument)
    if_cuda_multi_devices:, 70
run_mdata/fp/resources/strategy/ratio_unfinished (Argument)
    ratio_unfinished:, 71
run_mdata/fp/resources/wait_time (Argument)
    wait_time:, 72
run_mdata/fp/resources[Bohrium]/kwargs (Argument)
    kwargs:, 73
run_mdata/fp/resources[DistributedShell]/kwargs (Argument)
    kwargs:, 73
run_mdata/fp/resources[Fugaku]/kwargs (Argument)
    kwargs:, 73
run_mdata/fp/resources[LSF]/kwargs (Argument)
    kwargs:, 74
run_mdata/fp/resources[LSF]/kwargs/custom_gpu_line (Argument)
    custom_gpu_line:, 75
run_mdata/fp/resources[LSF]/kwargs/gpu_exclusive (Argument)
    gpu_exclusive:, 75
run_mdata/fp/resources[LSF]/kwargs/gpu_new_syntax (Argument)
    gpu_new_syntax:, 74
run_mdata/fp/resources[LSF]/kwargs/gpu_usage (Argument)
    gpu_usage:, 74
run_mdata/fp/resources[OpenAPI]/kwargs (Argument)
    kwargs:, 73
run_mdata/fp/resources[PBS]/kwargs (Argument)
    kwargs:, 75
run_mdata/fp/resources[SGE]/kwargs (Argument)
    kwargs:, 75
run_mdata/fp/resources[Shell]/kwargs (Argument)
    kwargs:, 75
run_mdata/fp/resources[SlurmJobArray]/kwargs (Argument)
    kwargs:, 74
run_mdata/fp/resources[SlurmJobArray]/kwargs/custom_gpu_line (Argument)
    custom_gpu_line:, 74
run_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size (Argument)
    slurm_job_size:, 74
run_mdata/fp/resources[Slurm]/kwargs (Argument)
    custom_gpu_line:, 73
run_mdata/fp/resources[Slurm]/kwargs/custom_gpu_line (Argument)
    custom_gpu_line:, 73
run_mdata/fp/resources[Torque]/kwargs (Argument)
    kwargs:, 75
run_mdata/fp/user_backward_files (Argument)
    user_backward_files:, 76
run_mdata/fp/user_forward_files (Argument)
    user_forward_files:, 76
run_mdata/model_devi (Argument)
    model_devi:, 52
run_mdata/model_devi/command (Argument)
    command:, 52
run_mdata/model_devi/machine (Argument)
    machine:, 52
run_mdata/model_devi/machine/batch_type (Argument)
    batch_type:, 52
run_mdata/model_devi/machine/clean_asynchronously (Argument)
    clean_asynchronously:, 53
run_mdata/model_devi/machine/context_type (Argument)
    context_type:, 53
run_mdata/model_devi/machine/local_root (Argument)
    local_root:, 52

```

```

run_mdata/model_devi/machine/remote_root (Argument)
    remote_root:, 52
run_mdata/model_devi/machine[BohriumContext]/remote_root (Argument)
    remote_profile:, 53
run_mdata/model_devi/machine[BohriumContext]/remote_root (Argument)
    email:, 54
run_mdata/model_devi/machine[BohriumContext]/remote_root (Argument)
    ignore_exit_code:, 54
run_mdata/model_devi/machine[BohriumContext]/remote_root (Argument)
    input_data:, 55
run_mdata/model_devi/machine[BohriumContext]/remote_root (Argument)
    keep_backup:, 55
run_mdata/model_devi/machine[BohriumContext]/remote_root (Argument)
    password:, 54
run_mdata/model_devi/machine[BohriumContext]/remote_root (Argument)
    program_id:, 54
run_mdata/model_devi/machine[BohriumContext]/remote_root (Argument)
    retry_count:, 54
run_mdata/model_devi/machine[HDFSContext]/remote_root (Argument)
    remote_profile:, 55
run_mdata/model_devi/machine[LazyLocalContext]/remote_root (Argument)
    remote_profile:, 53
run_mdata/model_devi/machine[LocalContext]/remote_root (Argument)
    remote_profile:, 53
run_mdata/model_devi/machine[OpenAPIContext]/remote_root (Argument)
    remote_profile:, 57
run_mdata/model_devi/machine[SSHContext]/remote_root (Argument)
    remote_profile:, 55
run_mdata/model_devi/machine[SSHContext]/remote_root (Argument)
    hostname:, 55
run_mdata/model_devi/machine[SSHContext]/remote_root (Argument)
    key_filename:, 56
run_mdata/model_devi/machine[SSHContext]/remote_root (Argument)
    look_for_keys:, 57
run_mdata/model_devi/machine[SSHContext]/remote_root (Argument)
    passphrase:, 56
run_mdata/model_devi/machine[SSHContext]/remote_profile (Argument)
    password:, 56
run_mdata/model_devi/machine[SSHContext]/remote_profile (Argument)
    port:, 56
run_mdata/model_devi/machine[SSHContext]/remote_profile (Argument)
    tar_compress:, 57
run_mdata/model_devi/machine[SSHContext]/remote_profile (Argument)
    timeout:, 56
run_mdata/model_devi/machine[SSHContext]/remote_profile (Argument)
    totp_secret:, 57
run_mdata/model_devi/machine[SSHContext]/remote_profile (Argument)
    username:, 55
run_mdata/model_devi/resources (Argument)
    resources:, 57
run_mdata/model_devi/resources/append_script (Argument)
    append_script:, 60
run_mdata/model_devi/resources/batch_type (Argument)
    batch_type:, 60
run_mdata/model_devi/resources/cpu_per_node (Argument)
    cpu_per_node:, 58
run_mdata/model_devi/resources/custom_flags (Argument)
    custom_flags:, 58
run_mdata/model_devi/resources/envs (Argument)
    envs:, 60
run_mdata/model_devi/resources/gpu_per_node (Argument)
    gpu_per_node:, 58
run_mdata/model_devi/resources/group_size (Argument)
    group_size:, 58
run_mdata/model_devi/resources/module_list (Argument)
    module_list:, 60
run_mdata/model_devi/resources/module_purge (Argument)
    module_purge:, 59
run_mdata/model_devi/resources/module_unload_list (Argument)
    module_unload_list:, 60
run_mdata/model_devi/resources/number_node (Argument)
    number_node:, 57
run_mdata/model_devi/resources/para_deg (Argument)

```

```

(Argument)
para_deg:, 59
run_mdata/model_devi/resources/prepend_script
(Argument)
prepend_script:, 60
run_mdata/model_devi/resources/queue_name
(Argument)
queue_name:, 58
run_mdata/model_devi/resources/source_list
(Argument)
source_list:, 59
run_mdata/model_devi/resources/strategy
(Argument)
strategy:, 58
run_mdata/model_devi/resources/strategy/customized_script_header_template_file
(Argument)
customized_script_header_template_file:, 59
run_mdata/model_devi/resources/strategy/if_cuda_multi_devices
(Argument)
if_cuda_multi_devices:, 58
run_mdata/model_devi/resources/strategy/ratio_unfinished
(Argument)
ratio_unfinished:, 59
run_mdata/model_devi/resources/wait_time (Argument)
wait_time:, 60
run_mdata/model_devi/resources[Bohrium]/kwargs run_mdata/model_devi/user_backward_files (Argument)
kwargs:, 61
run_mdata/model_devi/resources[DistributedShell]/kwargs run_mdata/model_devi/user_forward_files (Argument)
kwargs:, 61
run_mdata/model_devi/resources[Fugaku]/kwargs run_mdata/train (Argument)
kwargs:, 61
run_mdata/model_devi/resources[LSF]/kwargs run_mdata/train/command (Argument)
(Argument)
kwargs:, 62
run_mdata/model_devi/resources[LSF]/kwargs custom_gpu_line/main/machine/batch_type (Argument)
(Argument)
custom_gpu_line:, 63
run_mdata/model_devi/resources[LSF]/kwargs/gpu_exclusive (Argument)
gpu_exclusive:, 63
run_mdata/model_devi/resources[LSF]/kwargs/gpu_new_syntax (Argument)
gpu_new_syntax:, 63
run_mdata/model_devi/resources[LSF]/kwargs/gpu_usage (Argument)
gpu_usage:, 62
run_mdata/model_devi/resources[OpenAPI]/kwargs run_mdata/train/machine[BohriumContext]/remote_profile (Argument)
kwargs:, 61
run_mdata/model_devi/resources[PBS]/kwargs
(Argument)
kwargs:, 63
run_mdata/model_devi/resources[SGE]/kwargs
(Argument)
kwargs:, 63
run_mdata/model_devi/resources[Shell]/kwargs
(Argument)
kwargs:, 63
run_mdata/model_devi/resources[SlurmJobArray]/kwargs
(Argument)
kwargs:, 62
run_mdata/model_devi/resources[SlurmJobArray]/kwargs/custom_gpu_line (Argument)
custom_gpu_line_file:, 62
run_mdata/model_devi/resources[SlurmJobArray]/kwargs/slurm_job_size (Argument)
slurm_job_size:, 62
run_mdata/model_devi/resources[Slurm]/kwargs
(Argument)
kwargs:, 61
run_mdata/model_devi/resources[Slurm]/kwargs/custom_gpu_line (Argument)
custom_gpu_line:, 62
run_mdata/model_devi/resources[Torque]/kwargs
(Argument)
kwargs:, 64
run_mdata/model_devi/user_backward_files (Argument)
user_backward_files:, 64
run_mdata/model_devi/user_forward_files (Argument)
user_forward_files:, 64
run_mdata/train (Argument)
train:, 40
run_mdata/train/command (Argument)
command:, 40
run_mdata/train/machine (Argument)
machine:, 40
run_mdata/train/machine/batch_type (Argument)
batch_type:, 41
run_mdata/train/machine/clean_asynchronously (Argument)
clean_asynchronously:, 41
run_mdata/train/machine/context_type (Argument)
context_type:, 41
run_mdata/train/machine/local_root (Argument)
local_root:, 41
run_mdata/train/machine/remote_root (Argument)
remote_root:, 41
run_mdata/train/machine[BohriumContext]/remote_profile (Argument)

```

```

    remote_profile:, 42
run_mdata/train/machine[BohriumContext]/remote_profile/email/machine[SSHContext]/remote_profile/tar_com-
        (Argument)                                port:, 44
                                                (Argument)
email:, 42
run_mdata/train/machine[BohriumContext]/remote_profile/email/machine[SSHContext]/remote_profile/tar_com-
        (Argument)                                tar_compress:, 45
                                                (Argument)
ignore_exit_code:, 43
run_mdata/train/machine[BohriumContext]/remote_profile/email/machine[SSHContext]/remote_profile/totp_se-
        (Argument)                                timeout:, 44
                                                (Argument)
input_data:, 43
run_mdata/train/machine[BohriumContext]/remote_profile/email/machine[SSHContext]/remote_profile/totp_se-
        (Argument)                                (Argument)
keep_backup:, 43
run_mdata/train/machine[BohriumContext]/remote_profile/email/machine[SSHContext]/remote_profile/username-
        (Argument)                                username:, 44
                                                (Argument)
password:, 42
run_mdata/train/machine[BohriumContext]/remote_profile/password/resources (Argument)
        (Argument)                                resources:, 45
                                                run_mdata/train/resources/append_script
run_mdata/train/machine[BohriumContext]/remote_profile/program_id
        (Argument)                                append_script:, 48
                                                run_mdata/train/resources/batch_type (Argu-
program_id:, 42
run_mdata/train/machine[BohriumContext]/remote_profile/retry_count
        (Argument)                                batch_type:, 48
                                                run_mdata/train/resources/cpu_per_node (Argu-
retry_count:, 42
run_mdata/train/machine[HDFSContext]/remote_profile/retry_count
        (Argument)                                cpu_per_node:, 46
                                                run_mdata/train/resources/custom_flags (Argu-
remote_profile:, 43
run_mdata/train/machine[LazyLocalContext]/remote_profile/retry_count
        (Argument)                                custom_flags:, 46
                                                run_mdata/train/resources/envs (Argument)
remote_profile:, 42
run_mdata/train/machine[LocalContext]/remote_profile/retry_count
        (Argument)                                envs:, 48
                                                run_mdata/train/resources/gpu_per_node (Argu-
remote_profile:, 41
run_mdata/train/machine[OpenAPIContext]/remote_profile/retry_count
        (Argument)                                gpu_per_node:, 46
                                                run_mdata/train/resources/group_size (Argu-
remote_profile:, 45
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                group_size:, 46
                                                run_mdata/train/resources/module_list (Argu-
remote_profile:, 43
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                module_list:, 48
                                                run_mdata/train/resources/module_purge (Argu-
hostname:, 43
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                module_purge:, 47
                                                run_mdata/train/resources/module_unload_list
key_filename:, 44
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                (Argument)
look_for_keys:, 45
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                module_for_load_list:, 47
                                                run_mdata/train/resources/number_node (Argu-
passphrase:, 44
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                para_deg:, 45
                                                run_mdata/train/resources/para_deg (Argument)
password:, 44
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                para_deg:, 47
                                                run_mdata/train/resources/prepend_script (Ar-
password:, 44
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                gument)
                                                prependscript:, 48
                                                run_mdata/train/resources/queue_name (Argu-
password:, 44
run_mdata/train/machine[SSHContext]/remote_profile/retry_count
        (Argument)                                (Argument)

```

```

queue_name:, 46
run_mdata/train/resources/source_list (Argument)
source_list:, 47
run_mdata/train/resources/strategy (Argument)
strategy:, 46
run_mdata/train/resources/strategy/customized_script_header_template_file
(Argument)
customized_script_header_template_file:, 47
run_mdata/train/resources/strategy/if_cuda_multi_devices (Argument)
if_cuda_multi_devices:, 46
run_mdata/train/resources/strategy/ratio_unfinished (Argument)
ratio_unfinished:, 47
run_mdata/train/resources/wait_time (Argument)
wait_time:, 48
run_mdata/train/resources[Bohrium]/kwargs (Argument)
kwargs:, 49
run_mdata/train/resources[DistributedShell]/kwargs (Argument)
kwargs:, 49
run_mdata/train/resources[Fugaku]/kwargs (Argument)
kwargs:, 49
run_mdata/train/resources[LSF]/kwargs (Argument)
kwargs:, 50
run_mdata/train/resources[LSF]/kwargs/custom_gpu_line (Argument)
custom_gpu_line:, 51
run_mdata/train/resources[LSF]/kwargs/gpu_exclusive (Argument)
gpu_exclusive:, 51
run_mdata/train/resources[LSF]/kwargs/gpu_new_syntax (Argument)
gpu_new_syntax:, 50
run_mdata/train/resources[LSF]/kwargs/gpu_usage (Argument)
gpu_usage:, 50
run_mdata/train/resources[OpenAPI]/kwargs (Argument)
kwargs:, 49
run_mdata/train/resources[PBS]/kwargs (Argument)
kwargs:, 51
run_mdata/train/resources[SGE]/kwargs (Argument)
kwargs:, 51
run_mdata/train/resources[Shell]/kwargs (Argument)
kwargs:, 51
run_mdata/train/resources[SlurmJobArray]/kwargs (Argument)
kwargs:, 50
run_mdata/train/resources[SlurmJobArray]/kwargs/custom_gpu_line (Argument)
slurm_job_size:, 50
run_mdata/train/resources[Slurm]/kwargs (Argument)
kwargs:, 49
run_mdata/train/resources[Torque]/kwargs (Argument)
kwargs:, 51
run_mdata/train/user_backward_files (Argument)
user_backward_files:, 52
run_mdata/train/user_forward_files (Argument)
user_forward_files:, 51
run_mdata:
    run_mdata (Argument), 40
run_mdata_arginfo() (in module dp-
gen.generator.arginfo), 293
run_model_devi() (in module dp-
gen.generator.run), 297
run_model_devi() (in module dp-
gen.simplify.simplify), 299
run_property() (in module dp-
gen.auto_test.common_prop), 272
run_reaction() (in module dp-
gen.data.reaction), 278
run_report() (in module dp-
gen.tools.run_report), 302
run_report() (in module dp-
gen.tools.stat_sys), 302
run_syntask() (in module dp-
gen.auto_test.run), 273
run_train() (in module dp-
gen.generator.run), 297
run_vasp_md() (in module dp-
gen.data.gen), 278
run_vasp_relax() (in module dp-
gen.data.gen), 278
run_vasp_relax() (in module dp-
gen.data.surf), 279
runvasp() (in module dp-
gen.generator.lib.cvasp), 289
S
save() (dp-
gen.generator.lib.ele_temp.NBandsEsti-
method), 290
sc() (in module dp-
gen.auto_test.lib.crys), 252
scale:
    init_bulk_jdata/scale (Argument), 79
    init_surf_jdata/scale (Argument), 98
scan_files() (in module dp-
gen.tools.auto_gen_param), 301

```

```

scan_outcar_file()      (in module gen.data.tools.cessp2force_lin), 274
sepline() (in module dpigen.util), 304
set_atoms_typeids()    (in module gen.data.tools.io_lammps), 275
set_atoms_typeids_with_atomic_numbers() (in module dpigen.data.tools.io_lammps), 275
set_directory() (in module dpigen.util), 304
set_inter_type_func()  (dp.gen.auto_test.Lammps.Lammps method), 266
set_model_param() (dpigen.auto_test.Lammps.Lammps method), 266
set_version() (in module dpigen.generator.run), 297
setup_ele_temp() (in module dpigen.util), 304
shuffle_poscar:
    run_jdata[model_devi_engine=lammps]/shuffle_poscar
        (Argument), 28
shuffleSTRU_data() (in module dpigen.data.gen), 278
sigma:
    run_jdata[fp_style=pwscf]/fp_params/sigma
        (Argument), 39
    simplify_jdata[pwscf]/fp_params/sigma
        (Argument), 167
simplify_jdata (Argument)
    simplify_jdata:, 155
simplify_jdata/default_training_param (Argument)
    default_training_param:, 158
simplify_jdata/dp_compress (Argument)
    dp_compress:, 159
simplify_jdata/dp_train_skip_neighbor_stat
    (Argument)
    dp_train_skip_neighbor_stat:, 158
simplify_jdata/fp_accurate_soft_threshold
    (Argument)
    fp_accurate_soft_threshold:, 161
simplify_jdata/fp_accurate_threshold (Argument)
    fp_accurate_threshold:, 160
simplify_jdata/fp_style (Argument)
    fp_style:, 161
simplify_jdata/fp_task_max (Argument)
    fp_task_max:, 160
simplify_jdata/fp_task_min (Argument)
    fp_task_min:, 160
simplify_jdata/init_batch_size (Argument)
    init_batch_size:, 156
simplify_jdata/init_data_prefix (Argument)
    init_data_prefix:, 156
simplify_jdata/init_data_sys (Argument)
    init_data_sys:, 156
simplify_jdata/init_pick_number (Argument)
    init_pick_number:, 157
dp- simplify_jdata/iter_pick_number (Argument)
    iter_pick_number:, 157
simplify_jdata/labeled (Argument)
    labeled:, 157
simplify_jdata/mass_map (Argument)
    mass_map:, 156
simplify_jdata/model_devi_activation_func
    (Argument)
    model_devi_activation_func:, 160
simplify_jdata/model_devi_e_trust_hi (Argument)
    model_devi_e_trust_hi:, 157
simplify_jdata/model_devi_e_trust_lo (Argument)
    model_devi_e_trust_lo:, 157
simplify_jdata/model_devi_f_trust_hi (Argument)
    model_devi_f_trust_hi:, 157
simplify_jdata/model_devi_f_trust_lo (Argument)
    model_devi_f_trust_lo:, 157
simplify_jdata/numb_models (Argument)
    numb_models:, 158
simplify_jdata/one_h5 (Argument)
    one_h5:, 160
simplify_jdata/pick_data (Argument)
    pick_data:, 157
simplify_jdata/ratio_failed (Argument)
    ratio_failed:, 161
simplify_jdata/srtab_file_path (Argument)
    srtab_file_path:, 160
simplify_jdata/sys_batch_size (Argument)
    sys_batch_size:, 157
simplify_jdata/sys_configs (Argument)
    sys_configs:, 156
simplify_jdata/sys_configs_prefix (Argument)
    sys_configs_prefix:, 156
simplify_jdata/sys_format (Argument)
    sys_format:, 156
simplify_jdata/training_finetune_model (Argument)
    training_finetune_model:, 160
simplify_jdata/training_init_frozen_model
    (Argument)
    training_init_frozen_model:, 160
simplify_jdata/training_init_model (Argument)
    training_init_model:, 158
simplify_jdata/training_iter0_model_path (Argument)
    training_iter0_model_path:, 158
simplify_jdata/training_reuse_iter (Argument)
    training_REUSE_iter:, 159
simplify_jdata/training_REUSE_numb_steps (Argument)

```

```

    training_reuse_numb_steps:, 159
simplify_jdata/training_reuse_old_ratio
    (Argument)
    training_reuse_old_ratio:, 159
simplify_jdata/training_reuse_start_lr (Argument)
    training_reuse_start_lr:, 159
simplify_jdata/training_reuse_start_pref_e
    (Argument)
    training_reuse_start_pref_e:, 159
simplify_jdata/training_reuse_start_pref_f
    (Argument)
    training_reuse_start_pref_f:, 159
simplify_jdata/true_error_e_trust_hi (Argument)
    true_error_e_trust_hi:, 158
simplify_jdata/true_error_e_trust_lo (Argument)
    true_error_e_trust_lo:, 158
simplify_jdata/true_error_f_trust_hi (Argument)
    true_error_f_trust_hi:, 158
simplify_jdata/true_error_f_trust_lo (Argument)
    true_error_f_trust_lo:, 158
simplify_jdata/type_map (Argument)
    type_map:, 155
simplify_jdata/use_ele_temp (Argument)
    use_ele_temp:, 156
simplify_jdata:
    simplify_jdata (Argument), 155
simplify_jdata_arginfo() (in module dp-
    gen.simplify.arginfo), 298
simplify_jdata[abacus]/fp_dpks_descriptor
    (Argument)
    fp_dpks_descriptor:, 166
simplify_jdata[abacus]/fp_incar (Argument)
    fp_incar:, 166
simplify_jdata[abacus]/fp_kpt_file (Argument)
    fp_kpt_file:, 166
simplify_jdata[abacus]/fp_orb_files (Argument)
    fp_orb_files:, 165
simplify_jdata[abacus]/fp_pp_files (Argument)
    fp_pp_files:, 165
simplify_jdata[abacus]/fp_pp_path (Argument)
    fp_pp_path:, 165
simplify_jdata[abacus]/k_points (Argument)
    k_points:, 166
simplify_jdata[abacus]/user_fp_params (Argument)
    user_fp_params:, 166
simplify_jdata[cp2k]/external_input_path (Argument)
    external_input_path:, 165
simplify_jdata[cp2k]/user_fp_params (Argument)
    user_fp_params:, 165
simplify_jdata[custom]/fp_params (Argument)
    fp_params:, 168
simplify_jdata[custom]/fp_params/input_fmt
    (Argument)
    input_fmt:, 168
simplify_jdata[custom]/fp_params/input_fn
    (Argument)
    input_fn:, 168
simplify_jdata[custom]/fp_params/output_fmt
    (Argument)
    output_fmt:, 168
simplify_jdata[custom]/fp_params/output_fn
    (Argument)
    output_fn:, 168
simplify_jdata[gaussian]/cluster_cutoff
    (Argument)
    cluster_cutoff:, 162
simplify_jdata[gaussian]/cluster_cutoff_hard
    (Argument)
    cluster_cutoff_hard:, 162
simplify_jdata[gaussian]/cluster_minify
    (Argument)
    cluster_minify:, 162
simplify_jdata[gaussian]/fp_params (Argument)
    fp_params:, 162
simplify_jdata[gaussian]/fp_params/basis_set
    (Argument)
    basis_set:, 163
simplify_jdata[gaussian]/fp_params/charge
    (Argument)
    charge:, 163
simplify_jdata[gaussian]/fp_params/fragment_guesses
    (Argument)
    fragment_guesses:, 163
simplify_jdata[gaussian]/fp_params/keywords
    (Argument)
    keywords:, 162
simplify_jdata[gaussian]/fp_params/keywords_high_multiplicity
    (Argument)
    keywords_high_multiplicity:, 163
simplify_jdata[gaussian]/fp_params/multiplicity
    (Argument)
    multiplicity:, 163
simplify_jdata[gaussian]/fp_params/nproc (Argument)
    nproc:, 163
simplify_jdata[gaussian]/use_clusters (Argument)
    use_clusters:, 162
simplify_jdata[pwscf]/fp_params (Argument)

```

```

fp_params:, 167
simplify_jdata[pwscf]/fp_params/ecut (Argument)
    ecut:, 167
simplify_jdata[pwscf]/fp_params/ediff (Argument)
    ediff:, 167
simplify_jdata[pwscf]/fp_params/kspacing (Argument)
    kspacing:, 167
simplify_jdata[pwscf]/fp_params/sigma (Argument)
    sigma:, 167
simplify_jdata[pwscf]/fp_params/smearing (Argument)
    smearing:, 167
simplify_jdata[pwscf]/fp_pp_files (Argument)
    fp_pp_files:, 166
simplify_jdata[pwscf]/fp_pp_path (Argument)
    fp_pp_path:, 166
simplify_jdata[pwscf]/user_fp_params (Argument)
    user_fp_params:, 167
simplify_jdata[siesta]/cluster_cutoff (Argument)
    cluster_cutoff:, 164
simplify_jdata[siesta]/fp_params (Argument)
    fp_params:, 164
simplify_jdata[siesta]/fp_params/ecut (Argument)
    ecut:, 164
simplify_jdata[siesta]/fp_params/ediff (Argument)
    ediff:, 164
simplify_jdata[siesta]/fp_params/kspacing (Argument)
    kspacing:, 164
simplify_jdata[siesta]/fp_params/mixingWeight (Argument)
    mixingWeight:, 164
simplify_jdata[siesta]/fp_params/NumberPulay (Argument)
    NumberPulay:, 164
simplify_jdata[siesta]/fp_pp_files (Argument)
    fp_pp_files:, 165
simplify_jdata[siesta]/fp_pp_path (Argument)
    fp_pp_path:, 164
simplify_jdata[siesta]/use_clusters (Argument)
    use_clusters:, 163
simplify_jdata[vasp]/cvasp (Argument)
    cvasp:, 161
simplify_jdata[vasp]/fp_aniso_kspacing (Argument)
    fp_aniso_kspacing:, 161
simplify_jdata[vasp]/fp_incar (Argument)
    fp_incar:, 161
simplify_jdata[vasp]/fp_pp_files (Argument)
    fp_pp_files:, 161
simplify_jdata[vasp]/fp_pp_path (Argument)
    fp_pp_path:, 161
simplify_jdata[vasp]/fp_skip_bad_box (Argument)
    fp_skip_bad_box:, 162
simplify_mdata (Argument)
    simplify_mdata:, 168
simplify_mdata/api_version (Argument)
    api_version:, 168
simplify_mdata/deeppmd_version (Argument)
    deeppmd_version:, 169
simplify_mdata/fp (Argument)
    fp:, 193
simplify_mdata/fp/command (Argument)
    command:, 193
simplify_mdata/fp/machine (Argument)
    machine:, 193
simplify_mdata/fp/machine/batch_type (Argument)
    batch_type:, 193
simplify_mdata/fp/machine/clean_asynchronously (Argument)
    clean_asynchronously:, 194
simplify_mdata/fp/machine/context_type (Argument)
    context_type:, 194
simplify_mdata/fp/machine/local_root (Argument)
    local_root:, 194
simplify_mdata/fp/machine/remote_root (Argument)
    remote_root:, 194
    simplify_mdata/fp/machine[BohriumContext]/remote_profile (Argument)
        remote_profile:, 195
    simplify_mdata/fp/machine[BohriumContext]/remote_profile/ (Argument)
        email:, 195
    simplify_mdata/fp/machine[BohriumContext]/remote_profile/ (Argument)
        ignore_exit_code:, 196
    simplify_mdata/fp/machine[BohriumContext]/remote_profile/ (Argument)
        input_data:, 196
    simplify_mdata/fp/machine[BohriumContext]/remote_profile/ (Argument)
        keep_backup:, 196
    simplify_mdata/fp/machine[BohriumContext]/remote_profile/ (Argument)

```

```

password:, 195
simplify_mdata/fp/machine[BohriumContext]/remote_profile[Argumentprogram_id]
(Argument)                                     simplify_mdata/fp/resources/append_script
program_id:, 195                                append_script:, 201
simplify_mdata/fp/machine[BohriumContext]/remote_profile[Argumentretry_count]
(Argument)                                     batch_type:, 202
retry_count:, 196                                simplify_mdata/fp/resources/cpu_per_node (Argument)
simplify_mdata/fp/machine[HDFSContext]/remote_profile[Argumentcpu_per_node]
(Argument)                                     cpu_per_node:, 199
remote_profile:, 196                                simplify_mdata/fp/resources/custom_flags (Argument)
simplify_mdata/fp/machine[LazyLocalContext]/remote_profile[Argumentcustom_flags]
(Argument)                                     custom_flags:, 199
remote_profile:, 195                                simplify_mdata/fp/resources/envs (Argument)
simplify_mdata/fp/machine[LocalContext]/remote_profile[Argumentgpu_per_node]
(Argument)                                     gpu_per_node:, 199
remote_profile:, 194                                simplify_mdata/fp/resources/group_size (Argument)
simplify_mdata/fp/machine[OpenAPIContext]/remote_profile[Argumentgroup_size]
(Argument)                                     group_size:, 199
remote_profile:, 198                                simplify_mdata/fp/resources/module_list
simplify_mdata/fp/machine[SSHContext]/remote_profile[Argumenthostname]
(Argument)                                     hostname:, 201
remote_profile:, 197                                simplify_mdata/fp/resources/module_purge (Argument)
simplify_mdata/fp/machine[SSHContext]/remote_profile[Argumentkey_filename]
(Argument)                                     key_filename:, 200
remote_profile:, 197                                simplify_mdata/fp/resources/module_unload_list
key_filename:, 197                                look_for_keys[Argumentkeylist]
(Argument)                                     keylist:, 201
simplify_mdata/fp/machine[SSHContext]/remote_profile[Argumentnumber_node]
(Argument)                                     number_node:, 198
look_for_keys:, 198                                simplify_mdata/fp/resources/para_deg (Argument)
simplify_mdata/fp/machine[SSHContext]/remote_profile[Argumentpassword]
(Argument)                                     password:, 197
passphrase:, 197                                para_deg[Argumentprepend]
(Argument)                                     prepend:, 200
simplify_mdata/fp/machine[SSHContext]/remote_profile[Argumentqueue_name]
(Argument)                                     queue_name:, 199
port:, 197                                prepend_script:, 201
simplify_mdata/fp/machine[SSHContext]/remote_profile[Argumentsource_list]
(Argument)                                     source_list:, 199
tar_compress:, 198                                strategy[Argumentstrategylist]
(Argument)                                     strategylist:, 200
simplify_mdata/fp/machine[SSHContext]/remote_profile[Argumentstrategy]
(Argument)                                     strategy:, 198
timeout:, 198                                strategy[Argumenttotp_secret]
(Argument)                                     totp_secret:, 198
simplify_mdata/fp/machine[SSHContext]/remote_profile[Argumenttotp_secret]
(Argument)                                     totp_secret:, 198
username:, 197                                strategy[Argumentscript_header_template_file]
(Argument)                                     script_header_template_file:, 200
simplify_mdata/fp/resources (Argument)
resources:, 199                                strategy[Argumentif_cuda_multi_devices]
(Argument)                                     if_cuda_multi_devices:, 200

```



```
simplify_mdata/model_devi/machine[BohriumContext]/simplify_profile/model_devi/resources/batch_type  
    (Argument)  
    batch_type:, 190  
    (Argument)  
    retry_count:, 183  
simplify_mdata/model_devi/machine[HDFSContext]/simplify_profile/model_devi/resources/cpu_per_node  
    (Argument)  
    cpu_per_node:, 187  
    (Argument)  
    remote_profile:, 184  
simplify_mdata/model_devi/machine[LazyLocalContext]/simplify_profile/model_devi/resources/custom_flags  
    (Argument)  
    custom_flags:, 187  
    (Argument)  
    remote_profile:, 182  
simplify_mdata/model_devi/machine[LocalContext]/simplify_profile/model_devi/resources/envs (Ar-  
    gument)  
    envs:, 189  
    (Argument)  
    remote_profile:, 182  
simplify_mdata/model_devi/machine[OpenAPIContext]/simplify_profile/model_devi/resources/gpu_per_node  
    (Argument)  
    gpu_per_node:, 187  
    (Argument)  
    remote_profile:, 186  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/model_devi/resources/group_size  
    (Argument)  
    group_size:, 187  
    (Argument)  
    remote_profile:, 184  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/hostnames  
    (Argument)  
    module_list:, 189  
    (Argument)  
    hostname:, 184  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/key_filenames  
    (Argument)  
    module_purge:, 188  
    (Argument)  
    key_filename:, 185  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/look_for_keys  
    (Argument)  
    module_unload_list:, 189  
    (Argument)  
    look_for_keys:, 186  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/passphrase  
    (Argument)  
    number_node:, 187  
    (Argument)  
    passphrase:, 185  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/passwords  
    (Argument)  
    para_deg:, 188  
    (Argument)  
    password:, 185  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/port_devi/resources/prepend_script  
    (Argument)  
    prepend_script:, 189  
    (Argument)  
    port:, 185  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/tar_compression  
    (Argument)  
    queue_name:, 187  
    (Argument)  
    tar_compress:, 186  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/timeouts  
    (Argument)  
    source_list:, 188  
    (Argument)  
    timeout:, 185  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/totp_secrets  
    (Argument)  
    strategy:, 187  
    (Argument)  
    totp_secret:, 186  
simplify_mdata/model_devi/machine[SSHContext]/simplify_profile/usernames  
    (Argument)  
    customized_script_header_template_file:, 188  
    (Argument)  
    username:, 185  
simplify_mdata/model_devi/resources (Argu-  
    ment)  
    simplify_mdata/model_devi/resources/strategy/if_cuda_multi-  
    devices:, 186  
    (Argument)  
    resources:, 186  
simplify_mdata/model_devi/resources/append_script if_cuda_multi_devices:, 187  
    (Argument)  
    append_script:, 189  
    (Argument)
```

```

ratio_unfinished:, 188           custom_gpu_line:, 191
simplify_mdata/model_devi/resources/wait_time simplify_mdata/model_devi/resources[Torque]/kwargs
    (Argument)                   (Argument)
    wait_time:, 189             kwargs:, 193
simplify_mdata/model_devi/resources[Bohrium]/kwargs simplify_mdata/model_devi/user_backward_files
    (Argument)                   (Argument)
    kwargs:, 190                user_backward_files:, 193
simplify_mdata/model_devi/resources[Distributed]/kwargs simplify_mdata/model_devi/user_forward_files
    (Argument)                   (Argument)
    kwargs:, 190                user_forward_files:, 193
simplify_mdata/model_devi/resources[Fugaku]/kwargs simplify_mdata/train(Argument)
    (Argument)                   train:, 169
    kwargs:, 190                simplify_mdata/train/command(Argument)
simplify_mdata/model_devi/resources[LSF]/kwargs command:, 169
    (Argument)                   simplify_mdata/train/machine(Argument)
    kwargs:, 191                machine:, 169
simplify_mdata/model_devi/resources[LSF]/kwargs simplify_mdata/main/machine/batch_type
    (Argument)                   (Argument)
    custom_gpu_line:, 192        batch_type:, 169
simplify_mdata/model_devi/resources[LSF]/kwargs simplify_mdata/train/machine/clean_asynchronously
    (Argument)                   (Argument)
    gpu_exclusive:, 192         clean_asynchronously:, 169
simplify_mdata/model_devi/resources[LSF]/kwargs simplify_mdata/train/machine/context_type
    (Argument)                   (Argument)
    gpu_new_syntax:, 192         context_type:, 170
simplify_mdata/model_devi/resources[LSF]/kwargs simplify_mdata/train/machine/local_root
    (Argument)                   (Argument)
    gpu_usage:, 192              local_root:, 169
simplify_mdata/model_devi/resources[OpenAPI]/kwargs simplify_mdata/train/machine/remote_root(Argument)
    (Argument)                   remote_root:, 169
    kwargs:, 190
simplify_mdata/model_devi/resources[PBS]/kwargs simplify_mdata/train/machine[BohriumContext]/remote_profile
    (Argument)                   (Argument)
    kwargs:, 192                remote_profile:, 170
simplify_mdata/model_devi/resources[SGE]/kwargs simplify_mdata/train/machine[BohriumContext]/remote_profile
    (Argument)                   (Argument)
    kwargs:, 193                email:, 171
simplify_mdata/model_devi/resources[Shell]/kwargs simplify_mdata/train/machine[BohriumContext]/remote_profile
    (Argument)                   (Argument)
    kwargs:, 192                ignore_exit_code:, 171
simplify_mdata/model_devi/resources[SlurmJobArgs]/kwargs simplify_mdata/train/machine[BohriumContext]/remote_profile
    (Argument)                   (Argument)
    kwargs:, 191                input_data:, 172
simplify_mdata/model_devi/resources[SlurmJobArgs]/kwargs customize_machine[BohriumContext]/remote_profile
    (Argument)                   (Argument)
    custom_gpu_line:, 191        keep_backup:, 172
simplify_mdata/model_devi/resources[SlurmJobArgs]/kwargs customize_machine[BohriumContext]/remote_profile
    (Argument)                   (Argument)
    slurm_job_size:, 191         password:, 171
simplify_mdata/model_devi/resources[Slurm]/kwargs simplify_mdata/train/machine[BohriumContext]/remote_profile
    (Argument)                   (Argument)
    kwargs:, 191                program_id:, 171
simplify_mdata/model_devi/resources[Slurm]/kwargs customize_machine[BohriumContext]/remote_profile
    (Argument)                   (Argument)

```

```

    retry_count:, 171           simplify_mdata/train/resources/cpu_per_node
simplify_mdata/train/machine[HDFSContext]/remote_profile (Argument)
                                cpu_per_node:, 174
    remote_profile:, 172       simplify_mdata/train/resources/custom_flags
simplify_mdata/train/machine[LazyLocalContext]/remote_profile (Argument)
                                custom_flags:, 175
    remote_profile:, 170       simplify_mdata/train/resources/envs   (Argument)
simplify_mdata/train/machine[LocalContext]/remote_profile (Argument)
                                envs:, 177
    remote_profile:, 170       simplify_mdata/train/resources/gpu_per_node
simplify_mdata/train/machine[OpenAPIContext]/remote_profile (Argument)
                                gpu_per_node:, 175
    remote_profile:, 174       simplify_mdata/train/resources/group_size
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                group_size:, 175
    remote_profile:, 172       simplify_mdata/train/resources/module_list
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                module_list:, 176
    hostname:, 172            simplify_mdata/train/resources/module_purge
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                module_purge:, 176
    key_filename:, 173         simplify_mdata/train/resources/module_unload_list
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                module_unload_list:, 176
    look_for_keys:, 174        simplify_mdata/train/resources/number_node
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                number_node:, 174
    passphrase:, 173          simplify_mdata/train/resources/para_deg
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                para_deg:, 176
    password:, 173            simplify_mdata/train/resources/prepend_script
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                prepend_script:, 177
    port:, 173                simplify_mdata/train/resources/queue_name
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                queue_name:, 175
    tar_compress:, 174         simplify_mdata/train/resources/source_list
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                source_list:, 176
    timeout:, 173              simplify_mdata/train/resources/strategy
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                strategy:, 175
    totp_secret:, 173          simplify_mdata/train/resources/strategy/customized_script_
simplify_mdata/train/machine[SSHContext]/remote_profile (Argument)
                                customized_script_header_template_file:, 176
    username:, 172             simplify_mdata/train/resources/strategy/if_cuda_multi_devices_
simplify_mdata/train/resources (Argument) (Argument)
                                if_cuda_multi_devices:, 175
    resources:, 174            simplify_mdata/train/resources/strategy/ratio_unfinished
simplify_mdata/train/resources/append_script (Argument) (Argument)
                                ratio_unfinished:, 175
    append_script:, 177         simplify_mdata/train/resources/wait_time (Argument)
simplify_mdata/train/resources/batch_type (Argument)
                                batch_type:, 177

```

```

    wait_time:, 177
simplify_mdata/train/resources[Bohrium]/kwargssimplify_mdata/train/user_backward_files (Argument)
    kargs:, 178
simplify_mdata/train/resources[DistributedShell]/kwargssimplify_mdata/train/user_forward_files (Argument)
    kargs:, 178
simplify_mdata/train/resources[Fugaku]/kwargs simplify_mdata:
    (Argument)
    kargs:, 178
simplify_mdata/train/resources[LSF]/kwargs simplify_mdata:
    (Argument)
    kargs:, 179
simplify_mdata/train/resources[LSF]/kwargs/custom_gpu_line: 179
    (Argument)
    custom_gpu_line:, 180
simplify_mdata/train/resources[LSF]/kwargs/gpu_exclusive: 179
    (Argument)
    gpu_exclusive:, 179
simplify_mdata/train/resources[LSF]/kwargs/gpu_new_syntax: 179
    (Argument)
    gpu_new_syntax:, 179
simplify_mdata/train/resources[LSF]/kwargs/gpu_usage (Argument), 137
    (Argument)
    gpu_usage:, 179
simplify_mdata/train/resources[OpenAPI]/kwargs
    (Argument)
    kargs:, 177
simplify_mdata/train/resources[PBS]/kwargs
    (Argument)
    kargs:, 180
simplify_mdata/train/resources[SGE]/kwargs
    (Argument)
    kargs:, 180
simplify_mdata/train/resources[Shell]/kwargs
    (Argument)
    kargs:, 180
simplify_mdata/train/resources[SlurmJobArray]/kwargs
    (Argument)
    kargs:, 178
simplify_mdata/train/resources[SlurmJobArray]/kwargs/custom_gpu_line: 179
    (Argument)
    custom_gpu_line:, 179
simplify_mdata/train/resources[SlurmJobArray]/kwargs/slurm_job_size: 179
    (Argument)
    slurm_job_size:, 179
simplify_mdata/train/resources[Slurm]/kwargs sort_poscar() (in module dpgen.auto_test.lib.vasp),
    (Argument)
    kargs:, 178
simplify_mdata/train/resources[Slurm]/kwargs/custom_gpu_line: 179
    (Argument)
    custom_gpu_line:, 178
simplify_mdata/train/resources[Torque]/kwargs
    (Argument)
    kargs:, 179
    user_backward_files:, 181
    user_forward_files:, 180
    user_forward_files:, 180
    simplify_mdata (Argument), 168
    simplify_mdata_arginfo() (in module dpgen.simplify.arginfo), 298
    SJX_5p() (in module dpgen.auto_test.lib.mfp_eosfit),
    254
    skip_relax:
        init_surf_jdata/skip_relax (Argument), 98
        slurm_job_size:
            (Argument), 91
            init_reaction_mdata/build/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument)
            init_reaction_mdata/build/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            init_reaction_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument), 150
            init_reaction_mdata/reaxff/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument), 125
            init_surf_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument), 109
            run_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument), 74
            run_mdata/model_devi/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument), 62
            run_mdata/train/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument), 50
            simplify_mdata/fp/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument), 203
            simplify_mdata/model_devi/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument), 191
            simplify_mdata/train/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
            (Argument)
            smearing:
                run_jdata[fp_style=pwscf]/fp_params/smearing
                simplify_mdata/model_devi/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
                (Argument), 191
                simplify_mdata/train/resources[SlurmJobArray]/kwargs/slurm_job_size: 91
                (Argument)
                smearing:
                    run_jdata[fp_style=pwscf]/fp_params/smearing
                    simplify_jdata[pwscf]/fp_params/smearing
                    (Argument), 167
                    source_list:
                        sort_poscar() (in module dpgen.auto_test.lib.vasp),
                        259
                        source_list:
                            (Argument), 88
                            init_reaction_mdata/build/resources/source_list
                            (Argument), 134
                            init_reaction_mdata/fp/resources/source_list

```

(Argument), 147
init_reaction_mdata/reaxff/resources/source_list() (in module *dp-gen.data.tools.io_lammps*), 275
 (Argument), 122
init_surf_mdata/fp/resources/source_list() (in module *dp-gen.data.gen*), 278
 (Argument), 106
run_mdata/fp/resources/source_list() (Argument), 71
run_mdata/model_devi/resources/source_list() (Argument), 252
 (Argument), 59
run_mdata/train/resources/source_list() (Argument), 47
simplify_mdata/fp/resources/source_list() (Argument), 267
 (Argument), 200
simplify_mdata/model_devi/resources/source_list() (Argument), 292
 (Argument), 188
simplify_mdata/train/resources/source_list() (Argument), 19
 (Argument), 176
srtab_file_path:
run_jdata/srtab_file_path() (Argument), 21
simplify_jdata/srtab_file_path() (Argument), 160
stages:
init_bulk_jdata/stages() (Argument), 78
init_surf_jdata/stages() (Argument), 96
start_dpgui() (in module *dpgen.gui*), 303
stat_iter() (in module *dpgen.tools.stat_iter*), 302
stat_sys() (in module *dpgen.tools.stat_sys*), 302
stat_time() (in module *dpgen.tools.stat_time*), 302
strategy:
init_bulk_mdata/fp/resources/strategy() (Argument), 87
init_reaction_mdata/build/resources/strategy() (Argument), 133
init_reaction_mdata/fp/resources/strategy() (Argument), 146
init_reaction_mdata/reaxff/resources/strategy() (Argument), 121
init_surf_mdata/fp/resources/strategy() (Argument), 106
run_mdata/fp/resources/strategy() (Argument), 70
run_mdata/model_devi/resources/strategy() (Argument), 58
run_mdata/train/resources/strategy() (Argument), 46
simplify_mdata/fp/resources/strategy() (Argument), 199
simplify_mdata/model_devi/resources/strategy() (Argument), 187
simplify_mdata/train/resources/strategy() (Argument), 175
stress6_to_stress9() (in module *dp-gen.data.tools.io_lammps*), 275
stress9_to_stress6() (in module *dp-gen*), 252
super_cell:
init_bulk_jdata/super_cell() (Argument), 78
init_surf_jdata/super_cell() (Argument), 97
Surface (class in *dpgen.auto_test.Surface*), 267
symlink_user_forward_files() (in module *dp-gen.generator.lib.utils*), 292
sys_batch_size:
run_jdata/sys_batch_size() (Argument), 19
simplify_jdata/sys_batch_size() (Argument), 157
sys_configs:
run_jdata/sys_configs() (Argument), 19
simplify_jdata/sys_configs() (Argument), 156
sys_configs_prefix:
run_jdata/sys_configs_prefix() (Argument), 19
simplify_jdata/sys_configs_prefix() (Argument), 156
sys_format:
run_jdata/sys_format() (Argument), 19
simplify_jdata/sys_format() (Argument), 156
sys_idx:
run_jdata[model_devi_engine=amber]/model_devi_jobs/sys_idx() (Argument), 29
run_jdata[model_devi_engine=lammps]/model_devi_jobs/sys_idx() (Argument), 24
sys_link_fp_vasp_pp() (in module *dp-gen.generator.run*), 297
sys_rev_mat:
run_jdata[model_devi_engine=lammps]/model_devi_jobs/sys_rev_mat() (Argument), 24
System (class in *dpgen.tools.auto_gen_param*), 300
system_data() (in module *dpgen.auto_test.lib.lmp*), 253

T

take_cluster() (in module *dp-gen.generator.lib.gaussian*), 290
tar_compress:
init_bulk_mdata/fp/machine[SSHContext]/remote_profile() (Argument), 86
init_reaction_mdata/build/machine[SSHContext]/remote_profile() (Argument), 132
init_reaction_mdata/fp/machine[SSHContext]/remote_profile() (Argument), 144
init_reaction_mdata/reaxff/machine[SSHContext]/remote_profile() (Argument), 119

```

init_surf_mdata(fp/machine[SSHContext]/remote_profile/tar_compress_engine=lammps)/model_devi_jobs/test
    (Argument), 104
                                         (Argument), 23
run_mdata(fp/machine[SSHContext]/remote_profile/tar_compress
    (Argument), 69
                                         run_jdata[model_devi_engine=lammps]/model_devi_jobs/test
run_mdata/model_devi/machine[SSHContext]/remote_profile/tar_decompress
    (Argument), 57
                                         TEOS() (in module dpgen.auto_test.lib.mfp_eosfit), 254
run_mdata/train/machine[SSHContext]/remote_profile/tar_compressed (in module dpgen.auto_test.gen_confs), 272
    (Argument), 45
                                         timeout:
simplify_mdata(fp/machine[SSHContext]/remote_profile/tar_decompress)
    (Argument), 198
                                         (Argument), 86
simplify_mdata/model_devi/machine[SSHContext]/remote_profile/tar_compressed
    (Argument), 186
                                         (Argument), 131
simplify_mdata/train/machine[SSHContext]/remote_profile/tar_compressed
    (Argument), 174
                                         (Argument), 144
Task (class in dpgen.auto_test.Task), 268
task_param (dpgen.auto_test.Property.Property_property), 267
task_param() (dpgen.auto_test.Elastic.Elastic method), 262
task_param() (dpgen.auto_test.EOS.EOS method), 261
task_param() (dpgen.auto_test.Gamma.Gamma method), 263
task_param() (dpgen.auto_test.Interstitial.Interstitial method), 264
task_param() (dpgen.auto_test.Surface.Surface method), 268
task_param() (dpgen.auto_test.Vacancy.Vacancy method), 271
task_type (dpgen.auto_test.Property.Property_property), 267
task_type() (dpgen.auto_test.Elastic.Elastic method), 262
task_type() (dpgen.auto_test.EOS.EOS method), 261
task_type() (dpgen.auto_test.Gamma.Gamma method), 263
task_type() (dpgen.auto_test.Interstitial.Interstitial method), 264
task_type() (dpgen.auto_test.Surface.Surface method), 268
task_type() (dpgen.auto_test.Vacancy.Vacancy method), 271
tau_t:
    init_reaction_jdata/reaxff/tau_t (Argument), 113
taup:
    run_jdata[model_devi_engine=lammps]/model_devi_jobs/test
        (Argument), 25
                                         (Argument), 57
taut:
    run_jdata[model_devi_engine=lammps]/model_devi_jobs/test
        (Argument), 25
                                         (Argument), 45
temp:
    init_reaction_jdata/reaxff/temp (Argument), 113
template:

```

(*Argument*), 173

train:

- run_mdata/train (*Argument*), 40
- simplify_mdata/train (*Argument*), 169

training_args() (*in module* `dpgen.generator.arginfo`), 293

training_finetune_model:

- run_jdata/training_finetune_model (*Argument*), 22
- simplify_jdata/training_finetune_model (*Argument*), 160

training_init_frozen_model:

- run_jdata/training_init_frozen_model (*Argument*), 21
- simplify_jdata/training_init_frozen_model (*Argument*), 160

training_init_model:

- run_jdata/training_init_model (*Argument*), 20
- simplify_jdata/training_init_model (*Argument*), 158

training_iter0_model_path:

- run_jdata/training_iter0_model_path (*Argument*), 20
- simplify_jdata/training_iter0_model_path (*Argument*), 158

training_reuse_iter:

- run_jdata/training_reuse_iter (*Argument*), 20
- simplify_jdata/training_reuse_iter (*Argument*), 159

training_reuse_numb_steps:

- run_jdata/training_reuse_numb_steps (*Argument*), 21
- simplify_jdata/training_reuse_numb_steps (*Argument*), 159

training_reuse_old_ratio:

- run_jdata/training_reuse_old_ratio (*Argument*), 20
- simplify_jdata/training_reuse_old_ratio (*Argument*), 159

training_reuse_start_lr:

- run_jdata/training_reuse_start_lr (*Argument*), 21
- simplify_jdata/training_reuse_start_lr (*Argument*), 159

training_reuse_start_pref_e:

- run_jdata/training_reuse_start_pref_e (*Argument*), 21
- simplify_jdata/training_reuse_start_pref_e (*Argument*), 159

training_reuse_start_pref_f:

- run_jdata/training_reuse_start_pref_f (*Argument*), 21

simplify_jdata/training_reuse_start_pref_f (*Argument*), 159

trj_freq:

- run_jdata[model_devi_engine=amber]/model_devi_jobs/trj (*Argument*), 29
- run_jdata[model_devi_engine=lammps]/model_devi_jobs/trj (*Argument*), 24

true_error_e_trust_hi:

- simplify_jdata/true_error_e_trust_hi (*Argument*), 158

true_error_e_trust_lo:

- simplify_jdata/true_error_e_trust_lo (*Argument*), 158

true_error_f_trust_hi:

- simplify_jdata/true_error_f_trust_hi (*Argument*), 158

true_error_f_trust_lo:

- simplify_jdata/true_error_f_trust_lo (*Argument*), 158

type_map:

- init_bulk_jdata/type_map (*Argument*), 80
- init_reaction_jdata/type_map (*Argument*), 112
- run_jdata/type_map (*Argument*), 18
- simplify_jdata/type_map (*Argument*), 155

U

uniq() (*in module* `dpgen.data.tools.cessp2force_lin`), 274

universal() (*in module* `dpgen.auto_test.lib.mfp_eosfit`), 257

update_dict() (*in module* `dpgen.generator.lib.cp2k`), 289

update_mass_map() (*in module* `dpgen.generator.run`), 297

use_clusters:

- run_jdata[fp_style=gaussian]/use_clusters (*Argument*), 32
- run_jdata[fp_style=siesta]/use_clusters (*Argument*), 34
- simplify_jdata[gaussian]/use_clusters (*Argument*), 162
- simplify_jdata[siesta]/use_clusters (*Argument*), 163

use_ele_temp:

- run_jdata/use_ele_temp (*Argument*), 19
- simplify_jdata/use_ele_temp (*Argument*), 156

use_relative:

- run_jdata[model_devi_engine=lammps]/use_relative (*Argument*), 29

use_relative_v:

- run_jdata[model_devi_engine=lammps]/use_relative_v (*Argument*), 29

user_backward_files:

init_bulk_mdata/fp/user_backward_files
 (Argument), 93

init_reaction_mdata/build/user_backward_files
 (Argument), 139

init_reaction_mdata/fp/user_backward_files
 (Argument), 151

init_reaction_mdata/reaxff/user_backward_files
 (Argument), 127

init_surf_mdata/fp/user_backward_files
 (Argument), 111

run_mdata/fp/user_backward_files
 (Argument), 76

run_mdata/model_devi/user_backward_files
 (Argument), 64

run_mdata/train/user_backward_files
 (Argument), 52

simplify_mdata/fp/user_backward_files
 (Argument), 205

simplify_mdata/model_devi/user_backward_files
 (Argument), 193

simplify_mdata/train/user_backward_files
 (Argument), 181

user_forward_files:

init_bulk_mdata/fp/user_forward_files
 (Argument), 93

init_reaction_mdata/build/user_forward_files
 (Argument), 139

init_reaction_mdata/fp/user_forward_files
 (Argument), 151

init_reaction_mdata/reaxff/user_forward_files
 (Argument), 126

init_surf_mdata/fp/user_forward_files
 (Argument), 111

run_mdata/fp/user_forward_files
 (Argument), 76

run_mdata/model_devi/user_forward_files
 (Argument), 64

run_mdata/train/user_forward_files
 (Argument), 51

simplify_mdata/fp/user_forward_files
 (Argument), 205

simplify_mdata/model_devi/user_forward_files
 (Argument), 193

simplify_mdata/train/user_forward_files
 (Argument), 180

user_fp_params:

run_jdata[fp_style=abacus]/user_fp_params
 (Argument), 37

run_jdata[fp_style=cp2k]/user_fp_params
 (Argument), 36

run_jdata[fp_style=pwscf]/user_fp_params
 (Argument), 39

simplify_jdata[abacus]/user_fp_params
 (Argument), 166

simplify_jdata[cp2k]/user_fp_params
 (Argument), 165

simplify_jdata[pwscf]/user_fp_params
 (Argument), 167

init_bulk_mdata/fp/machine[SSHContext]/remote_profile/
 (Argument), 85

init_reaction_mdata/build/machine[SSHContext]/remote_p
 (Argument), 131

init_reaction_mdata/fp/machine[SSHContext]/remote_p
 (Argument), 143

init_reaction_mdata/reaxff/machine[SSHContext]/remote_
 (Argument), 118

init_surf_mdata/fp/machine[SSHContext]/remote_profile/
 (Argument), 103

run_mdata/fp/machine[SSHContext]/remote_profile/userna
 (Argument), 68

run_mdata/model_devi/machine[SSHContext]/remote_profil
 (Argument), 55

run_mdata/train/machine[SSHContext]/remote_profile/us
 (Argument), 44

simplify_mdata/fp/machine[SSHContext]/remote_profile/u
 (Argument), 197

simplify_mdata/model_devi/machine[SSHContext]/remote_p
 (Argument), 185

simplify_mdata/train/machine[SSHContext]/remote_profil
 (Argument), 172

V

Vacancy (class in `dpgen.auto_test.Vacancy`), 271

vacuum_max:
 init_surf_jdata/vacuum_max (Argument), 97

vacuum_min:
 init_surf_jdata/vacuum_min (Argument), 97

vacuum numb:
 init_surf_jdata/vacuum numb (Argument), 98

vacuum_resol:
 init_surf_jdata/vacuum_resol (Argument), 97

VASP (class in `dpgen.auto_test.VASP`), 269

VaspInput (class in `dpgen.database`), 281

VaspInput (class in `dpgen.database.vasp`), 285

vinet() (in module `dpgen.auto_test.lib.mfp_eosfit`), 257

vinet_pv() (in module `dpgen.auto_test.lib.mfp_eosfit`),
 257

voigt_to_stress() (in module `dpgen.auto_test.lib.util`), 258

W

wait_time:
 init_bulk_mdata/fp/resources/wait_time
 (Argument), 89

init_reaction_mdata/build/resources/wait_time
 (Argument), 135

```

init_reaction_mdata/fp/resources/wait_time
    (Argument), 148
init_reaction_mdata/reaxff/resources/wait_time
    (Argument), 123
init_surf_mdata/fp/resources/wait_time
    (Argument), 108
run_mdata/fp/resources/wait_time (Argument), 72
run_mdata/model_devi/resources/wait_time
    (Argument), 60
run_mdata/train/resources/wait_time
    (Argument), 48
simplify_mdata/fp/resources/wait_time
    (Argument), 201
simplify_mdata/model_devi/resources/wait_time
    (Argument), 189
simplify_mdata/train/resources/wait_time
    (Argument), 177
worker() (in module dpgen.auto_test.common_prop),
    272
write_file() (dpgen.database.DPPotcar method), 280
write_file() (dpgen.database.vasp.DPPotcar
    method), 285
write_incar_dict() (in module dpgen.generator.lib.vasp), 292
write_input() (dpgen.database.vasp.VaspInput
    method), 287
write_input() (dpgen.database.VaspInput method),
    283
write_input() (in module dpgen.auto_test.lib.abacus),
    252
write_input_dict() (in module dpgen.generator.lib.pwmat), 291
write_kpt() (in module dpgen.auto_test.lib.abacus),
    252
write_model_devi_out() (in module dpgen.generator.lib.make_calypso), 290

```

Z

`z_min:`
 `init_surf_jdata/z_min (Argument), 97`